#### DATA SHEET

# D9010ONFC ONFI Compliance Test Software

The Keysight Technologies, Inc. ONFI compliance test application provides a fast and easy way to test, debug and characterize your ONFI designs. The tests performed by the software are based on the ONFI



#### 4.1 Specification.

The ONFI (Open NAND Flash Interface) is a workgroup that consists of companies that design and enable NAND Flash memory. The standard creates a specification that allows for easy integration of NAND flash components into designs. ONFI offers higher speeds at 1066 MT/s with bidirectional source-synchronous DQS (data strobe) and scalable I/O interface.

### Features

The ONFI compliance test application offers several key features to simplify the validation of your designs.

- Intuitive setup wizard for quick test setup, configuration and test.
- Comprehensive test coverage of NVDDR2 and NVDDR3 electrical, timing, eye diagram and jitter tests.
- Offline testing capability with saved waveform files from the oscilloscope or ADS simulation tool.
- Easy interface to export the test result to the KS6800A series Data Analytics repository for quick analysis with the web-based visualization tool.

#### Comprehensive Test Coverage

The ONFI compliance test application allows you to use the oscilloscope to perform automated testing and margin analysis on your design. The application automatically configures the oscilloscope for each test and provides informative test result. It includes margin analysis indicating how close your device comes to passing or failing each test parameter. The ONFI compliance test automates the measurement as specified in the specification, which helps save test time and design cost.



## Easy Test Definition

The ONFI compliance test application automatically configures the oscilloscope for each test and provides information test results which includes margin and statistical analysis. The tests coverage includes electrical, timing and eye diagram tests as stated in the ONFI specification. The signal is optimized for most accurate test result and measurement repeatability. If you discover a problem with your device, the Custom mode feature and debug tool are available to aid in root-cause analysis.

ONFI Test Application New Device1	
File View Tools Help	
Set Up Select Tests Configure Connect Run Automate Results HTML Report	Ŧ
ONFI Test Application	A
Speed Grade	
533 [ MT/s ] Timing Mode: 7 O Live Offline	
Saved Waveform Setup	
Test Report Comments (Optional)	
Device Identifier: User Description:	
(SELECT OR TYPE) 🔽 (SELECT OR TYPE)	
Comments:	
Messages	Ţ
2017-12-18 03:40:07:788 PM Connecting to Infinitium Application initialized and ready for use.	A
2017-12-18 03:40:10:117 PM Connected to Infinitum	
2017-12-18 03:40:21:150 PM Ready	
m	×
Unsaved Changes 0 Tests	

Figure 1. ONFI application test setup screen. Select the speed grade of your device.

s	aved Waveforms Setup				?    -    ×
Γ					Done
d	Source Waveform File (	*.wfm / *.h5)			
	DQS Differential:			×	Browse
	Data (DQ):			X	Browse
11	Read Enable (RE):			×	Browse
11					
	Wite Enable (WE):			×	Browse
	DQS Plus:			X	Browse
	DQS Minus:			X	Browse
	List Of Test Groups —				
	• VIH/VIL Tests for DQ •				<u> </u>
	Test Group Signal Requ	uirement			
	Signal Required	Compulsory/Optional	Signal Loaded Status	Test Signal Loaded S	Status
	DQS	Compulsory	<u>X</u>	X	
	DQ	Compulsory	×		
ſ	• VOH/VOL Tests for DQ				
	Test Group Signal Requ			<b>T</b> - <b>b C</b> - <b>c</b> - <b>b</b> - <b>c</b>	
	Signal Required		Signal Loaded Status	Test Signal Loaded S	status
	DQS	Compulsory	<u> </u>	X	
	DQ	Compulsory			
ſ	VIH.diff/VIL.diff Tests				
	Test Group Signal Requ	uirement			×

Figure 2. Offline test setup. Support waveform files in .wfm or .h5 format.

# Configurability and Guided Connection

The ONFIcompliance test application provides flexibility in your test setup. The application lets you define controls for critical test parameters such as voltage threshold values, number of waveforms used for analysis and customizable violation settings. Once you have configured the tests, the connection page will display the connection diagram for the test you have selected.

You can also specify the number of test trials and only stop running selected tests when the stop condition is met. The application will save the worst-case test result to help you track down the anomalies in your signals.

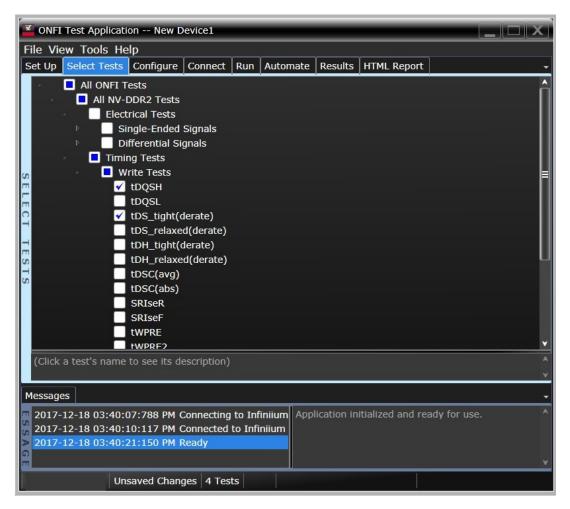


Figure 3. The Select Tab list all the tests available in your setup. You can easily setup the individual test or groups of tests.

## Comprehensive Result Analysis

In addition to provide you with measurement results, the compliance test application reports how close your test results are to the specified test limit. You can specify the level at which warnings are to be issued. You are provided a full array of statistics for each measurement.

	Solution ONFI_430								
F	ile View Tools Help								
s	Set Up Select Tests Co	onfigur	e Connect	Run	Automat	e Results	HTML	Report	
	Test Name	Actual	l Value			Margin %	Pass Li	mits # Trial	
	🚽 tDQSH	462.5	07500000 m	ntDSC(	avg)	14.8	VALUE	>= 403.00000000 mtDSC(avg) 1	
	d tDQSL	493.5	76800000 m	ntDSC(	avg)	22.5	VALUE	>= 403.00000000 mtDSC(avg) 1	
	tDS_tight(derate)	816 p	s			133.1	VALUE	>= tDS_tight_DynLimit_Min s 1	
	tDS_relaxed(derate)	816 p	s			104.0	VALUE >= tDS_relaxed_DynLimit_Min s 1		
	tDH_tight(derate) 1.065 ns			204.3	VALUE >= tDH_tight_DynLimit_Min s 1				
	tDH_relaxed(derate)	1.065	ns			166.3	VALUE	>= tDH_relaxed_DynLimit_Min s 1	
	🗙 tDSC(avg)	4.651				-7.0		>= tDSCavg_DynLimit_Min s 1	
	UITper(DQS)	700 fs				49.9	UITper	DQS_DynLimit_Min s <= VALUE <= tJITperDQS_DynLimit_Max s 1	
~	tDSC(abs)	4.651				40.0		psMin_Limit s <= VALUE <= tDSCabsMax_Limit s	
S		145 7	44200000 m	W/ns		-74 4	1 0000 III	00000000 V/ps <- VALUE <- 4 50000000000 V/ps 1 >	
	Parameter		Value					twpre	
S	231451_tWPRE2_Comp	liance	43.758 ns					AND A STATE OF A STATE	
	Additional Info							A second and as	
	twpre		(See image	·				5 5 5 <del>5</del>	
	Number of burst(s) mea	asured	1.000000e+	-000				and the second sec	
L	NumOfMeas		1.000						
L	Min		43.758 ns					provide Approximation and a strange of the strange	
L	Max		43.758 ns				Comment of the second sec		
	Mean		43.758 ns						
	Stdev		0.00000000	0000	s				
M	lessages								
Σ	2017-12-18 04:05:54:	057 PM	Measured	slew ra	tes not lis	sted in the o	derating	table. All selected tests completed.	
S H	2017-12-18 04:06:00:								
A S	2017-12-18 04:06:35:								
GE	2017-12-18 04:06:36: 2017-12-18 04:06:36:			/ed				Q	
2	Unsaved Changes 12 Tests Connection: Conn DQSDQ FAIL								

Figure 4. The ONFI test application documents your test parameters, pass or fail status, test limits, measured values and margin.

## **Data Analytics**

The KS6810A data analytics web service software provides an interface that allows the user to export the ONFI compliance test result directly to the data repository server via a URL. The user can retrieve the aggregated measurement to be viewed using the visualization tool included in the KS6810A software.

The visualization tool provides graphical plots in histogram or line mode that describes the measurement in different test conditions or properties.



Figure 5. User can import test results to the KS6810A software from the ONFI compliance test software and view the test results with the visualization tool.

## **Thorough Performance Reporting**

The ONFI compliance test application generates HTML reports that captures the performance, status and margins of your device under test. It also captures screenshots of critical measurements of your reference and documentation. This report is suitable for printing and sharing with your test vendors, customers, and suppliers.

				Result: FAIL				
				figuration Details e Description				
			Speed Grade Timing Mode	430				
				ession Details				
			Infiniium SW Version	6.10.702.0				
			Infiniium Model Numbe	r N8900A				
			Infiniium Serial Number	r No Serial				
			Application SW Version	0.99.9019.0				
			Debug Mode Used	No				
			Compliance Limits	NV-DDR2 Test Limit (official)				
Test F Pa	mmary of Re	esults	Last Test Date	2017-12-18 16:06:34 UTC -07:00				
Marg	t Statistics Failed issed 10 Total 13 gin Thresholds Varning < 5 % Critical < 0 %		Läst lest Uate	2017-12-18 16:06:34 01C -07:00				
Marg	t Statistics Failed issed 10 Total 13 gin Thresholds Varning <5% Critical <0% # Failed # Trial:	s Test Name	Actual Value Marg	jin Pass Limits				
Marg	t Statistics Failed 2 issed 10 Total 13 gin Thresholds Varning < 5 % Critical < 0 % s # Failed # Triat 0 1	s Test Name	Actual Value Mar 462.507500000 mtDSC(svg) 14.8	jin Pass Limits % VALUE >= 403.00000000 mtD	SC(avg)			
Marg	t Statistics Failed 5 issed 10 Total 13 gin Thresholds Varning < 5 % Critical < 0 % s # Failed # Trial: 0 1 0 1	s Test Name IDOSH IDOSL	Actual Value Mar 462.50750000 mtDSC(avg) 14.8 493.57680000 mtDSC(avg) 22.5	Im     Pass Limits       %     VALUE >= 403.00000000 mtD       %     VALUE >= 403.00000000 mtD	SC(avg) SC(avg)	_	_	
Marg	t Statistics Failed 2 issed 10 Total 13 gin Thresholds Varning < 5 % Critical < 0 % s # Failed # Trial 0 1 0 1	Test Name IDQSH IDQSL IDS tohtiderate)	Actual Value Mar 462.50750000 mtDSC(avg) 14.8 453.57680000 mtDSC(avg) 22.5 316 ps 131	jiii     Pass Limits       %     VALUE >= 403.00000000 mDH       %     VALUE >= 403.00000000 mDH       %     VALUE >= 405.bghc.Dyni.mLf	SC(avg) SC(avg) Min s			
Marg	t Statistics Failed 5 issed 10 Total 13 gin Thresholds Varning < 5 % Critical < 0 % s # Failed # Trial: 0 1 0 1	s Test Name IDOSH IDOSL	Actual Value Mar 462.50750000 mtDSC(avg) 14.8 453.57680000 mtDSC(avg) 22.5 316 ps 131	Im     Pass Limits       %     VALUE >= 403.00000000 mtD       %     VALUE >= 403.00000000 mtD	SC(avg) SC(avg) Min s	_		
Marg Pass	t Statistics Failed <b>5</b> issed 10 Total 13 gin Thresholds Varning < 5 % Critical < 0 % s # Failed # Trial 0 1 0 1 0 1	Test Name IDQSH IDQSL IDS tohtiderate)	Actual Value Mar 462.50750000 mtDSC(avg) 14.8 453.57680000 mtDSC(avg) 22.5 316 ps 131	jiii     Pass Limits       %     VALUE >= 403.00000000 mDH       %     VALUE >= 403.00000000 mDH       %     VALUE >= 405.bghc.Dyni.mLf	SC(avg) SC(avg) Min s	_		
Mars Pass	t Statistics Failed 5 issed 10 Total 13 gin Thresholds Varning < 5 % Critics < 0 % s # Failed # Trial 0 1 0 1 0 1 0 1 0 1	Test Name 100SH 100SL 10SL tabtiderate 10S. tabtiderate	Actual Value Mary 462.5050000 mtDSC(avg) 14.8 493.57680000 mtDSC(avg) 22.5 816 ps 133.1 816 ps 104.0	in Pass Limits	SC(avg) SC(avg) Min s Min s	NIL selartad		oletad
Marg Marg Marg Mass V Messa	t Statistics Failed 2 issed 10 Total 13 gin Thresholds Warning <5% Frailed # Triat 0 1 0 1 0 1 0 1 0 1 0 1 7-12-18 04:	Test Name (DQSH) DQSL DQS toht(derate) DS relaxed(derate) DS:54:057 PM	Actual Value Mar 462 20750000 mtDS(avg) 14.8 493 57680000 mtDS(avg) 22.5 316 ps 104.0 Measured slew rates not	Image: Pass Limits       % VALUE >= 403.00000000 mtD       % VALUE >= 105.00000000 mtD       % VALUE >= 105.grbn_D/mtml       % VALUE >= 105.grbn_D/mtml	SC(avg) SC(avg) Min s nat_Min s nble. ^	All selected t	ests com	pleted.
Pass Marg Marg Marg Marg V V V V V V V V V V V V V	t Statistics Tailed E issed 10 Total 13 gin Thresholds wrring < 5 % target 2 s Failed # Trial 0 1 0 1 0 1 0 1 0 1 0 1 0 1 0 1	Test Name IDQSH IDQSL IDS_teht/derate) IDS_relaxed/derate IDS_relaxed/derate IDS_tent	Actual Value     Mar       462.507500000 mtDSC(svg)     14.8       493.37580000 mtDSC(svg)     22.5       816 ps     104.0       Measured slew rates not     Measured slew rates not	in Pass Limits	SC(avg) SC(avg) Min s nat_Min s nble. ^	All selected t	ests com	pleted.
Pass V V V V V V V V V V V V V V V V V V	tatistics       Tailed     1       sseed     10       Total     13       gin Thresholds     25 %       Warning     < 5 %	Test Name (DQSH) DQSL DQS toht(derate) DS relaxed(derate) DS:54:057 PM	Actual Value Marr de2.50750000 mtDSC(avg) 14.8 de3.57680000 mtDSC(avg) 22.5 816 ps 133.1 816 ps 104.0 Measured slew rates not Project Saving	Image: Pass Limits       % VALUE >= 403.00000000 mtD       % VALUE >= 105.00000000 mtD       % VALUE >= 105.grbn_D/mtml       % VALUE >= 105.grbn_D/mtml	SC(avg) SC(avg) Min s nat_Min s nble. ^	All selected t	ests com	pleted.

Figure 6: The ONFI test application generates a summary report for quick results viewing. The report includes details such as test limits, test description and test results.

## Recommended oscilloscope

The D9010ONFC ONFI software is compatible with the Infiniium series oscilloscopes with operating software revision of 6.55 or higher.

Data rate	Minimum Bandwidth	Minimum Channels	Description
Up to1066 MT/s	4 GHz	4 (to run all tests in app)	Infiniium 90000A, S- series, V- series, Z- series, UXR oscilloscopes

## Ordering Information

#### Software

Model number	Description	Note
D9010ONFC	ONFI Compliance Test Software	Required
KS6810A	Data Analytics software (1 license)	Optional

## Flexible Software Licensing and KeysightCare Software Support Subscriptions

Keysight offers a variety of flexible licensing options to fit your needs and budget. Choose your license term, license type, and KeysightCare software support subscription.

#### License Terms

Perpetual – Perpetual licenses can be used indefinitely.

**Time-based** – Time-based licenses can be used through the term of the license only (6, 12, 24, or 36 months).

#### License Types

**Node-locked** – License can be used on one specified instrument/computer.

**Transportable** – License can be used on one instrument/computer at a time but may be transferred to another using Keysight Software Manager (internet connection required).

**USB Portable** – License can be used on one instrument/computer at a time but may be transferred to another using a certified USB dongle (available for additional purchase with Keysight part number E8900-D10).

**Floating (single site)** – Networked instruments/computers can access a license from a server one at a time. Multiple licenses can be purchased for concurrent usage.

## KeysightCare Software Support Subscriptions

Perpetual licenses are sold with a 12 (default), 24, 36, or 60-month software support subscription. Support subscriptions can be renewed for a fee after that.

Time-based licenses include a software support subscription through the term of the license.

#### Selecting your license:

- Step 1. Choose your software product (eg. S1234567A).
- Step 2. Choose your license term: perpetual or time-based.
- Step 3. Choose your license type: node-locked, transportable, USB portable, or floating.
- **Step 4.** Depending on the license term, choose your support subscription duration.

#### KeysightCare Software Support Subscription provides peace of mind amid evolving technologies.

- Ensure your software is always current with the latest enhancements and measurement standards.
- Gain additional insight into your problems with live access to our team of technical experts.
- Stay on schedule with fast turnaround times and priority escalations when you need support.

# Learn more at: www.keysight.com

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

