

Keysight N2823A and N5448B Coaxial Phase Matched Cables



User's Guide

The Keysight N5448B and N2823A consist of a pair of phase matched flexible coaxial cables with 2.92 mm male connectors on both ends, providing extended cable length to the compatible Keysight test fixtures, InfiniiMax 2.92 mm probe heads and other RF/microwave test connections. These cables allow flexibility, convenience and improved usability to the test setup.

Notices

© Keysight Technologies 2020

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Keysight Technologies as governed by United States and international copyright laws.

Manual Part Number

N5448-97001

Edition

Second Edition, June 2020

Available in electronic format only

Published by
Keysight Technologies
Plot No. CP-11, Sector- 8,
IMT Manesar, Gurgaon - 122051, India

Warranty

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED "AS IS," AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, KEYSIGHT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. KEYSIGHT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN. SHOULD KEYSIGHT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT WILL CONTROL.

Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

U.S. Restricted Rights

The Software is "commercial computer software," as defined by Federal Acquisition Regulation ("FAR") 2.101. Pursuant to FAR 12.212 and 27.405-3 and Department of Defense FAR Supplement ("DFARS") 227.7202, the U.S. government acquires commercial computer software under the same terms by which the software is customarily provided to the public. Accordingly, Keysight provides the Software to U.S. government customers under its standard commercial license, which is embodied in its End User License Agreement (EULA), a copy of which can be found at <http://www.keysight.com/find/sweula>. The license set forth in the EULA represents the exclusive authority by which the U.S. government may use, modify, distribute, or disclose the Software. The EULA and the license set forth therein, does not require or permit, among other things, that Keysight: (1) Furnish technical information related to commercial computer software or commercial computer software documentation that is not customarily provided to the public; or (2) Relinquish to, or otherwise provide, the government rights in excess of these rights customarily provided to the public to use, modify, reproduce, release, perform, display, or disclose commercial computer software or commercial computer software documentation. No additional government requirements beyond those set forth in the EULA shall apply, except to the extent that those terms, rights, or licenses are explicitly required from all providers of commercial computer software pursuant to the FAR and the DFARS and are set forth specifically in writing elsewhere in the EULA. Keysight shall be under no obligation to update, revise or otherwise modify the Software. With respect to any technical data as defined by FAR 2.101, pursuant to FAR 12.211 and 27.404.2 and DFARS 227.7102, the U.S. government acquires no greater than Limited Rights as defined in FAR 27.401 or DFAR 227.7103-5 (c), as applicable in any technical data.

Manual Notices

This manual provides these notices:



CAUTION

A **CAUTION** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a **CAUTION** notice until the indicated conditions are fully understood and met.

WARNING

A **WARNING** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a **WARNING** notice until the indicated conditions are fully understood and met.

Compliance and Environmental Information

Symbol	Description
	This symbol indicates the Environmental Protection Use Period (EUP) for the product's toxic substances for the China RoHS requirements.
	<p>This product complies with the WEEE Directive (2002/96/EC) marking requirements. The affixed label indicates that you must not discard this electrical/ electronic product in domestic household waste.</p> <p>Product Category: With reference to the equipment types in WEEE Directive Annex I, this product is classed as a "Monitoring and Control instrumentation product.</p> <p>Do not dispose in household waste.</p> <p>To return unwanted products, contact your local Keysight office, or see www.keysight.com/environment/product/ for more information.</p>

Cables Compatibility

The N2823A 39 inches (1 m) long cable is compatible with the following Keysight test fixtures:

- N7015A Type-C high-speed plug test fixture
- N7016A Type-C low-speed signal access and control fixture.

The N5448B 10 inches (25cm) long cable is compatible with the following Keysight probe head:

- N5444A InfiniiMax III 2.92mm differential probe head

These cables can also be used for any RF/microwave applications that require phase-matched 2.92mm cable connections with excellent measurement repeatability.

NOTE

To adapt the 2.92mm male connectors of the N2823A/N5448B cables and the N7015A test fixture, use the Keysight 3.5mm female-to-3.5mm female adapter (part number 5061-5311).




This adapter is also recommended to connect the 2.92mm male connector of the N2823A/N5448B cables to the channel input of an Infiniium V Series, Z Series, or 90000X oscilloscope.

N2823A Cable Dimensions




Side View of the N2823A Cable




2.92 mm Male Connectors at both ends
of the cables

N5448B Cable Dimensions



Side View of the N5448B Cable



2.92 mm Male Connectors at both ends
of the cables

Cable Features

- Low signal loss
- Broad frequency range
- 2.92mm (male) to 2.92mm (male) connection
- Improved usability by adding extra length to the test fixtures and probe heads

- Tightly matched phase error
- Up to 40GHz bandwidth
- Strain relieved

Cables Performance Specifications

Specification	Value	
	For N2823A	For N5448B
Impedance	50 ±1 Ohm	50 ±1 Ohm
Capacitance	88pF/m *	88pF/m *
Bandwidth	Up to 40GHz	Up to 40GHz
Insertion loss (Maximum)	4.2 dB	1.3 dB
	(Refer to Figure 1 and Figure 2 for Insertion Loss plots.)	
VSWR (Maximum)	1:1.433 (0.2-40GHz)	1:1.433 (0.2-40GHz)
Input Voltage (Maximum)	1400 V *	1400 V *
Frequency Range	0.2 ~ 40.0 GHz	0.2 ~ 40.0 GHz
Skew	4360 ±5 ps 5.0(p-p) psec (max) for each cable pair	1090 ±5 ps 5.0(p-p) psec (max) for each cable pair
Return Loss (Minimum)	30 dB (0.2-1.7GHz) 25 dB (1.7-4GHz) 22 dB (4-10GHz) 20 dB (10-16GHz) 18 dB (16-32GHz) 15 dB (32-40GHz)	30 dB (0.2-1.7GHz) 25 dB (1.7-4GHz) 22 dB (4-10GHz) 20 dB (10-16GHz) 18 dB (16-32GHz) 15 dB (32-40GHz)

* - Indicates a Reference value.

Insertion Loss Plots for Cables

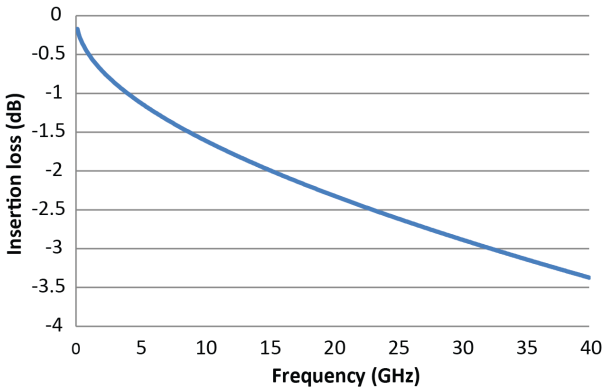


Figure 1 Insertion Loss Plot for N2823A Cable


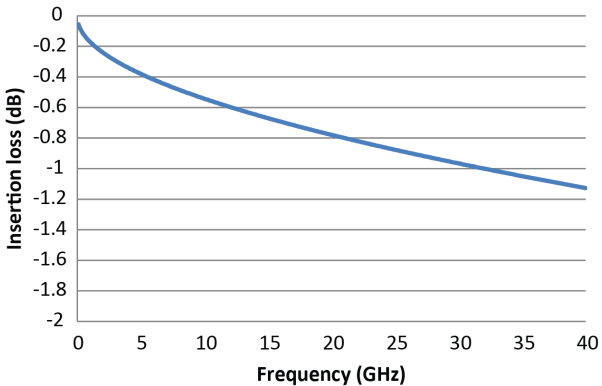


Figure 2 Insertion Loss Plot for N5448B Cable

Handling Cables

CAUTION

The minimum bend radius for the N2823A and N5448B coaxial cable pairs is 30mm. Bending these cables at too tight a radius or twisting the cables can cause damage, reduce performance, and impact the precision of these cables. Also, ensure that the plastic caps that are provided with these cables are installed when the cables are not in use.




Usage Examples

The following are some examples of the usage of the N2823A / N5448B cables with Keysight test fixtures and probe heads.


Example 1

In this example, the N5448B cables are used to extend the reach of the matched cable pairs for the differential high speed lines of the N7015A Type-C High Speed Test Fixture to facilitate their connectivity with the Infiniium Oscilloscope channels.

3.5mm female-to-3.5mm
female adapter (5061-5311)

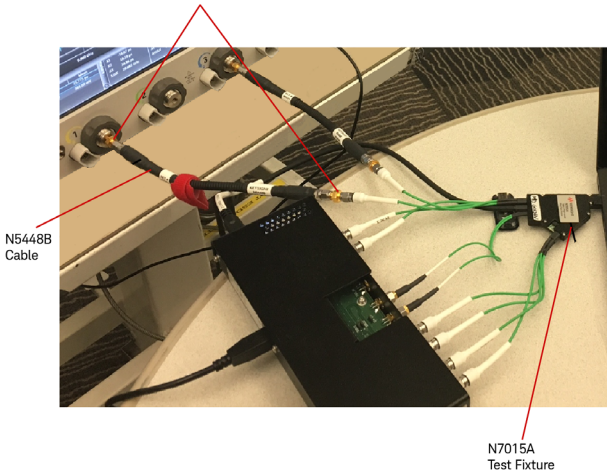

Example 2

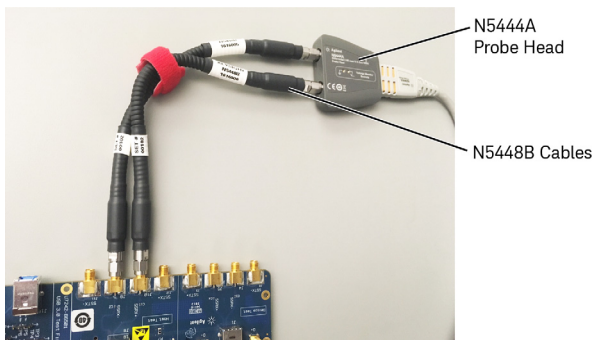

Downloading the S-parameter File

The N7015A high speed test fixture has four high speed differential paths from its 2.92 mm connectors to its type C plug. In order to correct for the signal loss of the N2823A coaxial phase-matched cable pair when used with the N7015A test fixture in the de-embedding software such as InfiniiSim, download the S-parameter file from www.keysight.com/find/N2823A. On this product page, click the **Technical Support** link and then click the **Drivers, Firmware, & Software** tab.