

# Perma-Kleen Industrial Grade Watertight Antimicrobial Portable Power



**PERMAKLEEN**



## Industry Leading Features:

- UL & CSA, NSF Approvals
- External TPE Husk Molded for wider temperature range, higher crush, chemical resistance
- Inhibits growth of bacteria, molds, mildews and fungi
- Patented Antimicrobial additives offers over 99.98% protection for E.coli, Staph, MRS and Listeria
- Antimicrobial additive is effective for the life of the product
- Patented 8-Point seal offers exceptional performance for high pressure and heat washdown
- Device Housing Screws, Blades and Contact are Plated for better contact and service life
- Cord Grip Nut and Grommet System offer a wide range of cable sizes


 **Industry Leading, Ericson Exclusive**



## Additional Features:

All Available in Black  
\*Custom Colors Available

## Unique Features:



8-Point Tongue & Groove Seal Dust & Moisture Seal



External Rubber Husk Higher Temperature range. Superior crush, chemical resistance



Plated Device Screws and Contact Blades



Optional Antimicrobial Plug Cover offers IP69K protection when not in use



Patented Antimicrobial SEOW Cord Available in Various Configurations

## Locking Configurations:



15-AMP Locking  
1520-PW6P-AM, 1620-CW6P-AM



20-AMP Locking  
2310-PW6P-AM, 2410-CW6P-AM

# NEMA Configuration Chart:

	Face View	NEMA Configuration	Amperage	Voltage	Perma-Kleen Plug	Perma-Kleen Connector
2-Pole / 3-Wire		NEMA 5-15	15A	125V	1510-PW6P-AM	1610-CW6P-AM
		NEMA 5-20	20A	125V	1512-PW6P-AM	1612-CW6P-AM
		NEMA L5-15	15A	125V	1520-PW6P-AM	1620-CW6P-AM
		NEMA L5-20	20A	125V	2310-PW6P-AM	2410-CW6P-AM
		NEMA L5-30	30A	125V	2510-PW6P-AM	2610-CW6P-AM
		NEMA 6-15	15A	250V	1514-PW6P-AM	1614-CW6P-AM
		NEMA 6-20	20A	250V	1516-PW6P-AM	1616-CW6P-AM
		NEMA L6-15	15A	250V	1522-PW6P-AM	1622-CW6P-AM
		NEMA L6-20	20A	250V	2312-PW6P-AM	2412-CW6P-AM
		NEMA L6-30	30A	250V	2512-PW6P-AM	2612-CW6P-AM
		NEMA L7-15	15A	277V	1524-PW6P-AM	1624-CW6P-AM
		NEMA L7-20	20A	277V	2314-PW6P-AM	2414-CW6P-AM
		NEMA L7-30	30A	277V	2514-PW6P-AM	2614-CW6P-AM
3-pole 3-wire		Non-NEMA <sup>1</sup>	20A	125 / 250V	2316-PW6P-AM	2416-CW6P-AM
		Non-NEMA <sup>1</sup>	20/10A	250 / 600V	2317-PW6P-AM	2417-CW6P-AM
		Non-NEMA <sup>1</sup>	15/10A	125 / 250V	1507-PW6P-AM	1607-CW6P-AM
3-pole / 4-wire		NEMA L14-20	20A	125 / 250V	2320-PW6P-AM	2420-CW6P-AM
		NEMA L14-30	30A	125 / 250V	2520-PW6P-AM	2620-CW6P-AM
		NEMA L15-20	20A	250V / 3-phase	2322-PW6P-AM	2422-CW6P-AM
		NEMA L15-30	30A	250V / 3-phase	2522-PW6P-AM	2622-CW6P-AM
		NEMA L16-20	20A	480V / 3-phase	2324-PW6P-AM	2424-CW6P-AM
		NEMA L16-30	30A	480V / 3-phase	2524-PW6P-AM	2624-CW6P-AM
		NEMA L17-30	30A	600V / 3-phase	2526-PW6P-AM	2626-CW6P-AM
		Non-NEMA <sup>1</sup>	20A	120 / 208V	2326-PW6P-AM	2426-CW6P-AM
3-pole 3-wire		Non-NEMA <sup>1</sup>	30A	125 / 250V	2516-PW6P-AM	2616-PW6P-AM
		Non-Nema	250/600	250 / 600V	2317-PW6P-AM	2417-PW6P-AM
4-pole 4-wire		NEMA L18-30	30A	120 / 208V 3-phase wye	2530-PW6P-AM	2630-PW6P-AM
		Non-NEMA <sup>1</sup>	30A	120 / 208V 3-phase wye	2528-PW6P-AM	2628-PW6P-AM

<sup>1</sup>All non-NEMA configurations are non-grounding

# Plug Covers:



**16CW-AM** Fits 16XX CW6P-AM Connectors  
**24CW-AM** Fits 24XX CW6P-AM Connectors  
**26CW-AM** Fits 26XX CW6P-AM Connectors



**15PW-AM** Fits 15XX PW6P-AM Plug


## Features:

- Use with Ericson's Perma-Tite® plugs to seal out water, dust and other contaminants and to protect blades from damage when plug is not in-use
- Eight-point rubber tongue and groove sealing system provides environmental protection
- Additional protection provided by a unique internal water/dust wiper
- Easy to assemble
- Ericson's Radiant Yellow for High Visibility on job sites


Part Number	Description
15PW-AM	Male closure cap, for use with 15A Straight Blade & Locking devices and 20A Straight Blade devices.
16CW-AM	Female replacement cover for CW6P connectors
24CW-AM	Female Large replacement cover for CW6P connectors
26CW-AM	Female 30 Amp Large replacement cover for CW6P connectors

# Product Dimensions:





## 10/15/20-Amp Straight, 15-Amp Locking

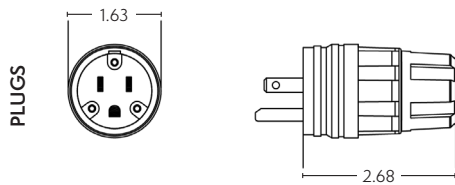

## 20/30-Amp Locking

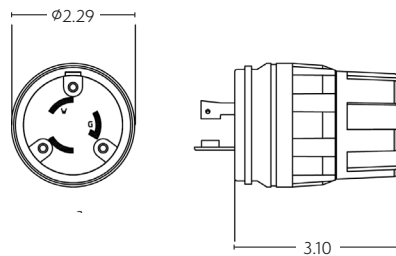

## 20/30-Amp Locking

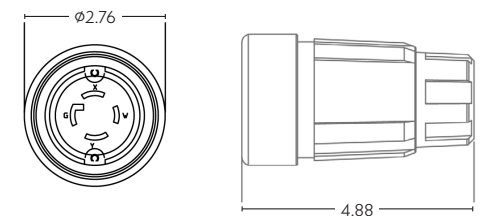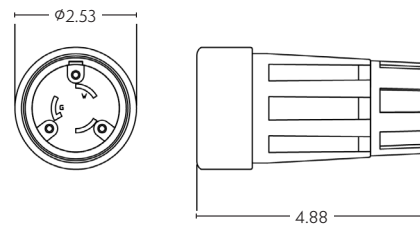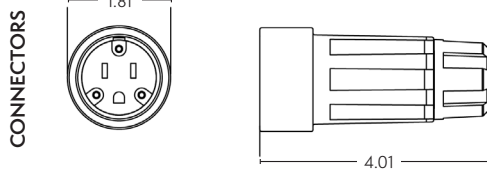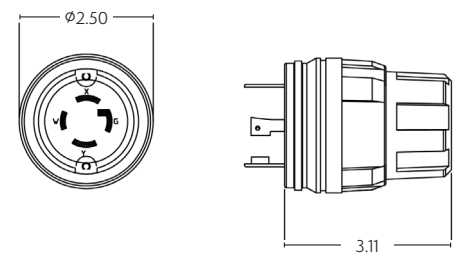

# Antimicrobial Cord:

Part Number	Overall Spool/ Reel Length	AWG Cable Size & # of Conductors	Cable Type	Color
183250-AM	250	18/3	SEOW/STOW	Yellow
163250-AM	250	16/3	SEOW/STOW	Yellow
144250-AM	250	14/4	SEOW/STOW	Yellow
143250-AM	250	14/3	SEOW/STOW	Yellow
124250-AM	250	12/4	SEOW/STOW	Yellow
123250-AM	250	12/3	SEOW/STOW	Yellow
104250-AM	250	10/4	SEOW/STOW	Yellow
103250-AM	250	10/3	SEOW/STOW	Yellow
1631000-AM	1000	16/3	SEOW/STOW	Yellow
1441000-AM	1000	14/4	SEOW/STOW	Yellow
1431000-AM	1000	14/3	SEOW/STOW	Yellow
1241000-AM	1000	12/4	SEOW/STOW	Yellow
1231000-AM	1000	12/3	SEOW/STOW	Yellow
1041000-AM	1000	10/4	SEOW/STOW	Yellow
1031000-AM	1000	10/3	SEOW/STOW	Yellow



## Related Products:



**Perma-Spec**  
E515P, E515C



**Perma-Link**  
1510-P, 1610-C



**Perma-Grip**  
1510-PG, 1610-CG



**Hospital Grade**  
1530 PH, 1630 CH



**SmartMonitor**  
AEGCP Compliant  
1510-PML/GML, 1610-CML/GML



**SmartMonitor**  
AEGCP Compliant  
1510-PW6PL, 1610-CW6PL



**Perma-Tite**  
IP69k Water Tight  
1510-PW6P, 1610-CW6P



**Perma-Link 50A**  
CS 6365-P, CS 6364-C



**ERICSON**  
SAFETY IS OUR STANDARD

Ericson Manufacturing Company  
4323 Hamann Parkway  
Willoughby, OH 44094, USA



1-800-374-2766  
info@ericson.com  
L1000707B