

# DVI, KVM and Audio Extender Over Cat5e/6 Using HDBaseT Up to 245 ft.



## Touchboards

205 Westwood Ave, Long Branch, NJ 07740  
Phone: 866-94 BOARDS (26273) / (732)-222-1511  
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

## LDX-Plus

Long Range DVI-D, USB Keyboard and Mouse, RS-232 and Audio Extender  
Extend DVI-D video, USB keyboard and mouse, RS-232 and IR signals  
up to 245 feet over a single Cat5e/6 cable

### OVERVIEW

Using HDBaseT technology, the LDX-Plus DVI extender is capable of sending a DVI-D signal up to 245 feet over a single conventional and inexpensive Cat5e/6 cable. HDBaseT technology is superior to older DVI extenders that require a special Cat6 shielded cable to go a short distance. The LDX-Plus DVI also supports the extension of USB keyboard, USB mouse, RS-232 and IR signals, giving users the ability to control KVM functions remotely.


### FEATURES

- Extends DVI-D up to 245 feet from the Source
- Data Recovery for Digital Video
- Supports up to 1920x1200 Digital Video Resolution (@ 60Hz)
- Supports up to 4K/2K (3840x2160) Video Resolution (@ 30Hz)
- Automatic DDC Learning
- Supports USB Keyboard and Mouse
- Uncompressed Video Using HDBaseT
- IR and RS-232 Extension Enables Remote Control
- External Power Adapter for Transmitter and Receiver Unit
- Plug-and-Play Ready

### APPLICATIONS

- Digital Signage
- Security
- PC Networking
- Conference Center Systems
- Point of Sale
- Camera Surveillance
- Video Phone
- Control Room Systems
- Recording Studio
- PC KVM Extension

### APPLICATION DIAGRAM

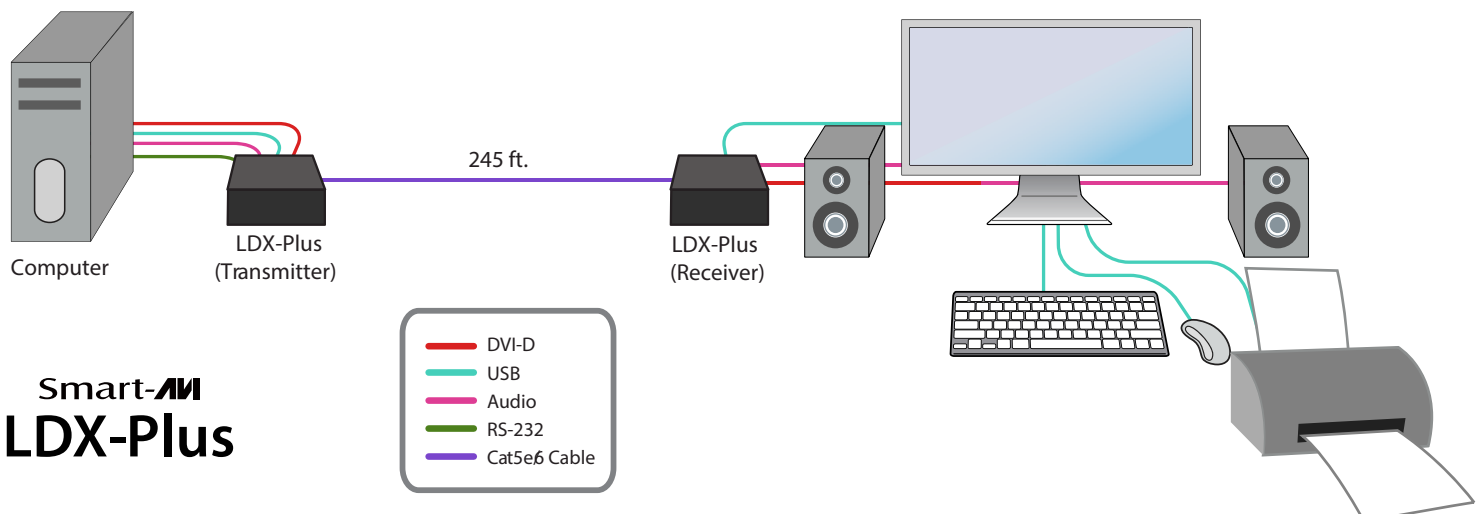


# SPECIFICATIONS




LDX-Plus-RX Front



LDX-Plus-TX Front

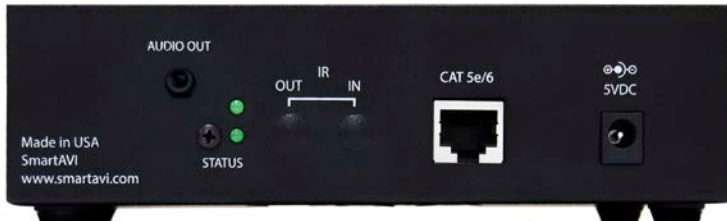

LDX-Plus-RX Back

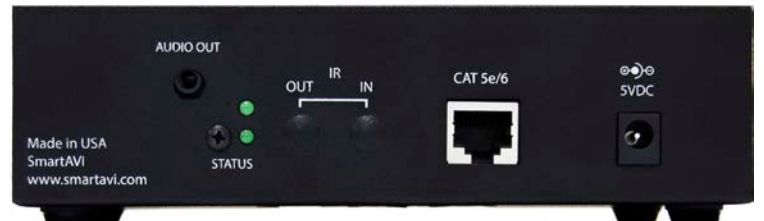

LDX-Plus-TX Back

## VIDEO

Format	DVI-D Single Link
Maximum Pixel Clock	165 MHz
Input Interface (TX)	(1) DVI-D 29-pin (Female)
Output Interface (RX)	(1) DVI-D 29-pin (Female)
Resolution	Up to 1920 x 1200 @ 60Hz, Up to 4K/2K (3840x2160) @ 30Hz
DDC	5 volts p-p (TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.

## USB

Signal Type	OHCI/UHCI (USB 1.1)
Input Interface (TX)	(1) USB Type B (Female)
Output Interface (RX)	(2) USB Type A (Female)

## RS-232

Input Interface (TX)	(1) DB9 (Female)
Output Interface (RX)	(1) DB9 (Female)
Speed	@ 115 Kbps

## AUDIO

Input Interface (TX)	(1) 3.5 mm (Female)
Output Interface (RX)	(1) 3.5 mm (Female)
Frequency Response	30KHz to 80KHz

## OTHER

Power	External 100-240 VAC/5VDC3A @20W
Dimensions	8.25" W x 1" H x 3.625" D
Weight	1 lb
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

Part No.	Description
LDX-Plus-S	DVI-D, USB, RS-232 and IR Extender. Includes: [LDX-Plus-TX, LDX-Plus-RX, 2x (PS5VDC3A)]



Designed and Manufactured in the USA

[www.smartavi.com](http://www.smartavi.com)

Tel: 800.AVI.2131 • 818.503.6200 • 11651

Vanowen St. North Hollywood, CA. 91605

**Smart-AVI**  
SMART AUDIO VIDEO INNOVATION