

Liberty Platinum Sound System


Technical Specifications







AC Only Also Available

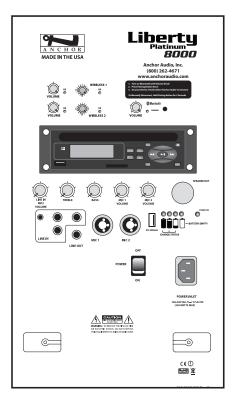

(LIB-8000CU2 Back Panel Shown)

Features

Reach Crowds of 1,500+

AC Mode = 125W / DC Mode = 100W

Optional Single or Dual Built-in UHF Wireless with 16 User Selectable Channels

Optional Built-In CD/MP3 Combo Player

Remote Control for CD/MP3 Combo Player

3.5mm input for iPod®

Comes with Standard Built-in Bluetooth

USB Port for Charging MP3 Player/iPod

Two Universal Microphone Input Jacks

Recessed Back Panel Protects Knobs and Ports

True AC/DC or AC only - 110/220V Power Supply

Ceramic Compression Driver

10" Woofer

Proprietary Class D Amplifier

User Replaceable Battery

Charging LED Bar Indicator

Operates 6-8 hours on a Single Charge

Speaker Out to Power Companion Speaker

LIBERTY MODELS AC/DC

LIB-8000	Liberty with Bluetooth
LIB-8000U1	Liberty with Bluetooth & 1 wireless receiver
LIB-8000U2	Liberty with Bluetooth & 2 wireless receivers
LIB-8000C	Liberty with Bluetooth & CD/MP3 combo player
LIB-8000CU1	Liberty with Bluetooth, CD/MP3 combo player & 1 wireless receiver
LIB-8000CU2	Liberty with Bluetooth, CD/MP3 combo player & 2 wireless receivers

UHF WIRELESS

WH-8000 Wireless handheld microphone/ transmitter (540-570 MHz)

WB-8000 Wireless body-pack transmitter

(540-570 MHz) (requires handsfree microphone) Microphone options

include:

Over-the-Ear/EM-TA4F, Lapel/LM-60,

Collar/CM-60, Headband/HBM-TA4F



205 Westwood Ave, Long Branch, NJ 07740 Phone: 866-94 BOARDS (26273) / (732)-222-1511 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

TECHNICAL SPECIFICATIONS

Rated Power Output Max SPL @ Rated Power Battery

LIB-8001

Frequency Response Line Output (post fader) AC Power Regs. USB

Dimensions (HWD) Weight (AC/DC) Weight (AC only)

125 watts AC / 100 watts DC

117 dB Two 12 V, lead acid rechargeable, 9.0 AH

Full recharge: approx 7 hrs 60 Hz - 15 kHz ± 3dB isolated, 600 Ω , 1/4" phone 100 - 240 VAC, 50/60 Hz, 300W max

Unpowered companion speaker

5V 500mA 22" x 14" x 11.5" (56 x 35.6 x 29.2 cm)

38 lbs / 17 Kg 26 lbs / 12 Kg Mic Inputs:

Lo-Z (1 K Ω), balanced, XLR

12 VDC condenser mic (phantom) power Hi-Z (10 K Ω), unbalanced, 1/4'' phone Hi-Z (10 K Ω), unbalanced, 1/8'' stereo

unbalanced, stereo RCA

Line In Sensitivity For Rated Output

-52 dBV (2.5 mVrms) Lo-Z Microphone Hi-Z Microphone -43 dBV (7.5 mVrms) Auxiliary (line) -14 dBV (200 mVrms)

Phantom Power

Speaker Out 4-pole Neutrik Speakon® jack



(Features & Specifications Subject to Change Without Notice)

Anchor Audio, Inc.

Portable Sound Systems • Carlsbad, California

800.262.4671

www.anchoraudio.com