

- 1. INSERT FSR SERIES T6-LB UNIT (SOLD SEPARATELY) INTO FRAME.
- 2. SECURE FSR SERIES T6-LB UNIT TO FRAME WITH SUPPLIED SCREWS.

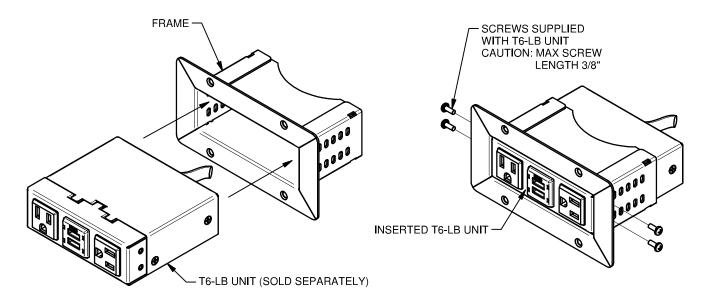

- 3. DETERMINE LOCATION OF FRAME ASSEMBLY AND CUT 5" x 1-7/8" OPENING ON TABLE SURFACE. INSERT FRAME ASSEMBLY INTO OPENING.
- 5" x 1-7/8"
  OPENING,
  1/4" MAX
  CORNER
  RADII
- 4. USE FRAME AS TEMPLATE FOR PILOT HOLES AND SECURE FRAME ASSEMBLY TO TABLE WITH SUPPLIED MOUNTING SCREWS. MAKE ELECTRICAL CONNECTIONS AS REQUIRED.

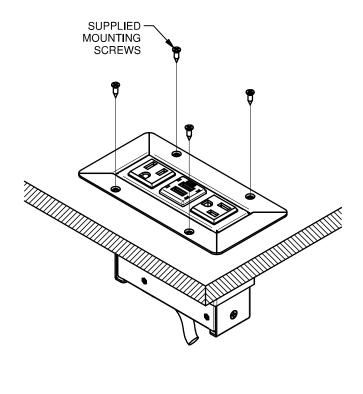

43325 LIT1643