


Seville Lectern System

Technical Specifications



The Seville lectern brings an air of strength and integrity to any presentation. With its built-in sound system and rich oak finish, the Seville is at home on stage, in an elegant hotel or in the university auditorium. The wireless model allows the presenter to use a projector or white board with a hands free microphone.

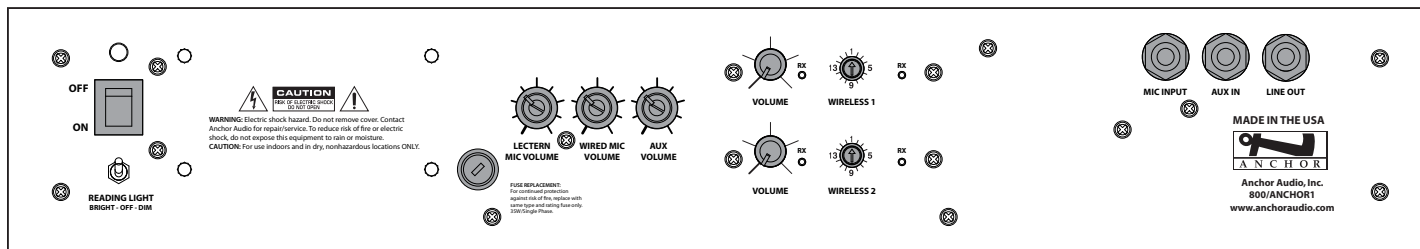

(LP-8000U2 Control Panel Shown)

SEVILLE MODELS

LP-8000	Seville lectern
LP-8000U1	Seville lectern with one built-in wireless receiver
LP-8000U2	Seville lectern with two built-in wireless receivers

UHF WIRELESS

WH-8000	Wireless handheld microphone/transmitter (540-570 MHz)
WB-8000	Wireless body-pack transmitter (540-570 MHz) (requires handsfree microphone) Microphone options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-TA4F

ACCESSORIES

LM-618	24" gooseneck microphone
LC-650	Padded nylon slipcover
UHF-7000	UHF 64 channel wireless microphone set with choice of wireless handheld mic/transmitter (540-570 MHz) or wireless body-pack transmitter (540-570 MHz) with handsfree microphone. Handsfree microphone options include: Over-the-Ear/EM-TA4F, Lapel/LM-60, Collar/CM-60, Headband/HBM-60



Features

- Reach Crowds of 500+
- 20W Amplifier and High Efficiency speaker
- Sensitive 24" Gooseneck Electret Microphone for Clear Voice Projection
- Shock-Absorbing Microphone Mount
- Line Output Jack for Recording Presentations
- One or Two Built-in Wireless Receivers
- Input Jack: 1/4"
- Dual-Intensity Reading Light
- Line-Level Output For Recording
- Deluxe Model has Rich, Golden Oak Surfaces & Solid Oak Trim
- Tilt-N-Roll Casters for Quick & Easy Transport

TECHNICAL SPECIFICATIONS

Rated Power Output	20 Watts	Inputs	
Max SPL @ Rated Power	113 dB @ 1 meter	Lectern Microphone	Lo-Z, balanced, phantom power, XLR
Frequency Response	65 Hz - 15 KHz	Auxiliary Microphone	Lo-Z, unbalanced, 1/4"-phone
AC Power Reqs.	110 - 125 V AC, 50/60 Hz 210 - 240 V AC, 50/60 Hz (40 VA nominal, 120 VA max)	Aux	Hi-Z, unbalanced, 1/4"-phone
Speaker Type	6.5" woofer, high-output tweeter	Sensitivity For Rated Output	
Dimensions (HWD)	49" x 24" x 21" (125 x 61 x 53 cm)	Microphone	-52 dBV (2.5 mVrms)
Weight	122 lbs/ 55 Kg	Line	-14 dBV (200 mVrms)
		Outputs	
		Line (post fader)	buffer isolated, 1/4" phone



(Features & Specifications Subject to Change Without Notice)

*Woodwork comes with 2 Year Warranty

Anchor Audio, Inc.
Portable Sound Systems • Carlsbad, California

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

800.262.4671
www.anchoraudio.com