


Key Features

5000 Lumen Brightness | Ultra-high Contrast Ratio | Long-lasting Laser
Phosphor Light Source | One-wire HDBT Input | 360-degree Orientation




Product Description

Bright and versatile for any professional installation, the ViewSonic® LS800HD 1080p laser projector delivers everything you need for big screens in big venues. Delivering 5,000 lumens of advanced high brightness, 100,000:1 contrast ratio, and up to 30,000 hours of light source life, this projector is ideal for auditoriums, lecture halls, large boardrooms, houses of worship, and more. Thanks to SuperColor™ technology, content is brought to life with captivating color, crisp graphics, and stunning videos no matter the environment. This top-notch performer is also easy to deploy and manage with its wide 1.65x optical zoom, vertical/horizontal keystone, 4-corner adjustment, and a vertical/horizontal lens shift feature that provides extreme flexibility in even the most challenging installations. Thanks to the built-in HDBT receiver, the projector is capable of receiving uncompressed HD video and audio from over 200 feet away via network cable. Moreover, 360-degree tilt angle projection, portrait mode, and 24/7 operation allow for extreme mounting flexibility. The ViewSonic® LS800HD is the ideal 1080p laser projector for professional installations, large venues, and business and education environments.

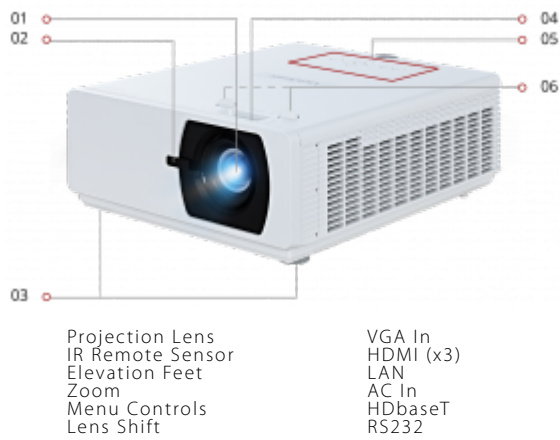


01 Projection Lens
02 IR Remote Sensor
03 Elevation Feet
04 Zoom
05 Menu Controls
06 Lens Shift

VGA In
HDMI (x3)
LAN
AC In
HDBaseT
RS232

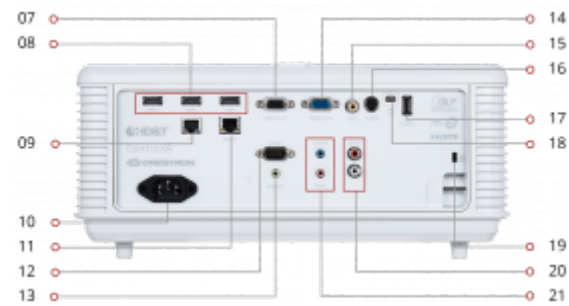

07 Audio Out
08 Monitor Out
09 Video
10 3D Sync
11 USB 2.0 Type A
12 USB Mini B


14 Kensington Lock Slot
15 Audio In (R/L)
16 Audio In / Mic In



1920 x 1080
RESOLUTION



5,000 ANSI
LUMENS



1.2-1.9
THROW RATIO

Contact Sales

- call: 888.881.8781
- email: salesinfo@viewsonic.com
- visit: viewsonic.com

Display:

Type:	DLP Laser
Resolution Type:	HD (1920x1080)
Resolution:	1920 x 1080
Brightness (Lumens):	5,000 ANSI
Display Size (in.):	30 - 300 in. / 0.76 - 7.62 m
Throw Distance:	4.1 - 41 ft / 1.3 - 12.5 m
Throw Ratio:	1.2-1.9
Keystone:	Vertical (± 25°) / Horizontal (± 30°)
Lens:	1.65x optical zoom
Light Source (watt):	Laser bank x 4
Light Source Life, Normal (hours):	20000
Light Source Life, Dynamic Eco-Mode (hours):	30000
Color Depth:	1.07B Color (R/G/B 10bit)
Dynamic Contrast Ratio:	100,000:1
Aspect Ratio:	16:9
Lens Shift:	Horizontal (-2.5% +2.5%) / Vertical (-2.9% +11.8%)
Operation Rating:	24/7

Video Signal:

Frequency Horizontal:	15K~102KHz
Frequency Vertical:	23~120Hz

Compatibility:

PC Resolution (max):	1920 x 1200
PC Resolution (min):	640 x 480
Mac® Resolution (max):	1920 x 1200
Mac® Resolution (min):	640 x 480

Connector:

USB 2.0 Type A(1), Ethernet LAN (RJ45)(1), 3.5mm Audio Out(1), 3.5mm Audio In(1), Control (RS-232)(1), HDMI(3), VGA In(1), VGA Out(1), Composite RCA Video In(1), Mini USB(1), RCA Audio In (L/R)(1), RCA Audio Out(1), 3D VESA(1), HDBT(1)

Audio:

Internal Speakers:	5W (x2)
--------------------	---------

Power:

Voltage:	100-240V+/- 10%, 50/60Hz AC
Consumption (typical):	430W
Stand-by:	<0.5W

Controls:

Physical Controls:	Display, Image, Power Management, Basic, Advanced, System, Information (See user guide for full OSD functionality)
On Screen Display:	Power, keystone/arrow keys, left/blank, menu/exit, right/panel key lock, mode/enter, auto, source

Operating Conditions:

Temperature:	32-104° F (0 - 40° C)
Humidity (non-condensing):	0-90%
IP Code:	IP6X

Additional Hardware:

Kensington Lock Slot:	1
-----------------------	---

Weight (imperial):

Net (lbs):	24.3
Gross (lbs):	30.0

Weight (metric):

Net (kg):	11.0
Gross (kg):	13.6

Dimensions (imperial) (WxHxD):

Packaging (in.):	22.0 x 11.9 x 18.5
Physical (in.):	14.2 x 6.3 x 17.3

Dimensions (metric) (WxHxD):

Packaging (mm):	559.0 x 301.0 x 469.0
Physical (mm):	360.0 x 161.0 x 440.0

General:

AV Control: AMX Certified, ATEN Certified, Crestron Certified

Regulations: FCC, UL/CUL, ROHS

PACKAGE CONTENTS: LS800HD projector, power cable, VGA cable, remote control, Quick Start Guide

Warranty: Five-year limited warranty on parts and labor, 1-year limited warranty on the light source, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).

Recycle/Disposal: Please dispose of in accordance with local, state or federal laws.

UPC: 766907932317

Accessories:

PGD-350, PJ-SCW-1001W, PJ-WMK-006, PM-FCP, VC10, VCB10

Awards:

Copyright © ViewSonic Corporation 2000-2019. All rights reserved. (03/22/2019 02:20 PM PST)

Select your preferred Country/Region: ▼