




PS501D

Preset Torque Screwdriver, with powder coat finish for sure grip





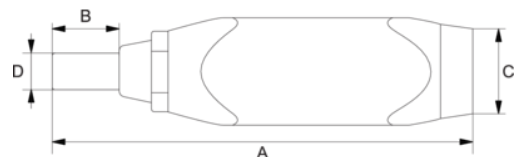

PRODUCT DETAILS

- ESD safe (IEC 61340-5-1)
- Torque limiting clutch prevents over application of force to fastener
- 1/4" Hexagon anti-magnetic spring loaded bit holder to avoid ESD damage to sensitive equipment or components in electronic applications
- Preset Torque Screwdriver, with all metal 3-lobe shaped handle
- Cam-over torque limiting clutch for repeatability
- Powder coat wrinkle finish provides positive grip
- Accuracy meets or exceeds +/-6% over recommended usage period: 5000 cycles or one year, whichever occurs first
- Clockwise torque measurement only. It can be used to loosen fasteners without affecting the internal mechanism.
- Cam-Over technology provides tactile and audible feedback when torque values are reached
- On request, preset screwdrivers can be set and certified with a declaration of conformity in compliance with International Standards.
- ISO 6789, ISO 1174, ASME B107.300-2010
- Made in USA







PRODUCT ATTRIBUTES





Product: **PS501-1D**

	4-22 cNM		6-32 ozf.in		1/4 in
A	115 mm	A	4.53 in	B	18,2 mm
B	0,72 in	C	28 mm	C	1.10 in
D	9,6 mm	D	0,38 in		0.147 kg





Product: **PS501-2D**

	7-70 cNM		10-100 ozf.in		1/4 in
A	141 mm	A	5.55 in	B	18,2 mm
B	0,72 in	C	28 mm	C	1.10 in
D	9,6 mm	D	0,38 in		0.200 kg

Product: **PS501-3D**

	15-170 cNM		1.5-15 lbf.in		1/4 in
A	141 mm	A	5.55 in	B	18,2 mm
B	0,72 in	C	28 mm	C	1.10 in
D	9,6 mm	D	0,38 in		0.198 kg

Product: **PS501-4D**

	45-450 cNM		4-40 lbf.in		1/4 in
A	154 mm	A	6.06 in	B	18,2 mm
B	0,72 in	C	32 mm	C	1.26 in
D	9,6 mm	D	0,38 in		0.270 kg