


# LX-PNADJ-EPW


## LX-PNADJ-EPW - PNEUMATIC HEIGHT-ADJUSTABLE LECTERN WITH KWIKBOOST EDGEPOWER™ CHARGING STATION

### Product Specifications

<b>Item Number</b>	<b>LX-PNADJ-EPW</b>
<b>Overall Dimensions</b>	25.5" W x 17" D x 28" - 42.5" H
<b>Base Dimensions</b>	22" W x 17" D
<b>Tabletop Dimensions</b>	25.5" W x 16.7" D x .07" H
<b>Item Weight</b>	23.1 lbs
<b>Leg/Base Make</b>	Powder Coated Steel
<b>Height Expansion Make</b>	Aluminum
<b>Tabletop Make</b>	Medium Density Fiberboard (MDF) with Rubber Trim
<b>Tilt</b>	4 Positions; 10°, 20°, 30°, 90°
<b>Paper-Stop Lip</b>	Yes
<b>Height Adjustment Mechanism</b>	Pneumatic Gas Foot Pedal
<b>Weight Capacity</b>	100 lbs
<b>Casters (2)</b>	2" Casters, 2 Stationary Rubber Feet
<b>Shipping Method</b>	Ground
<b>Shipping Carton Dims</b>	34" W x 21" D x 5" H
<b>Shipping Weight</b>	27 lbs
<b>Assembly Required</b>	Yes

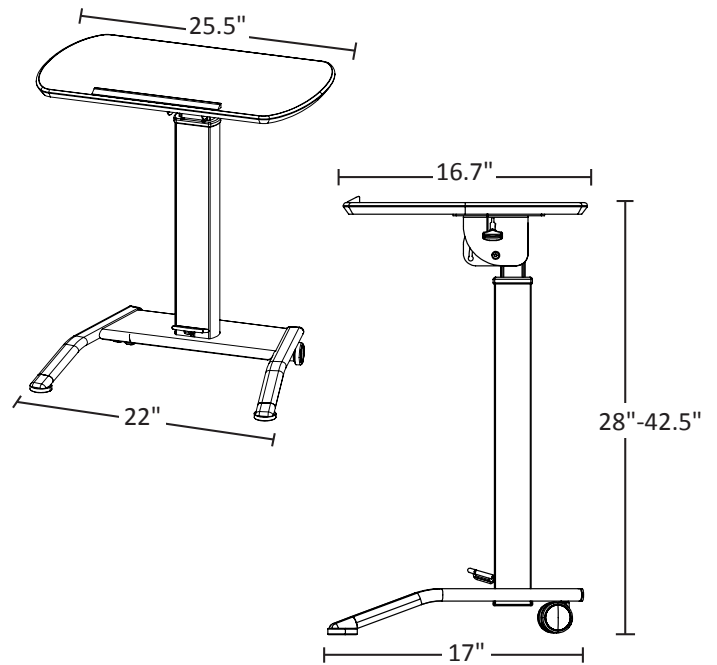

<b>Item Number</b>	<b>KBEP-BASE1</b>
<b>Overall Dimensions</b>	0.75" D x 3.25" W x 2.25" H
<b>Battery Slots</b>	1
<b>Input Power</b>	100-240V 50/60Hz (2A)
<b>Output Power (to battery)</b>	25.5V 3.0A
<b>Battery Cell Recharge Time</b>	2 hours
<b>Shipping Method</b>	Ground
<b>Shipping Carton Dimensions*</b>	1 carton; 10" W x 10" D x 2" H
<b>Shipping Weight*</b>	2 lbs.

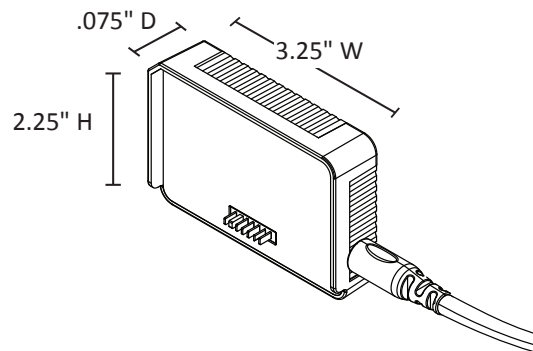


To Order, Call Your Sales Representative  
or 800-323-4656

# LX-PNADJ-EPW


## LX-PNADJ-EPW - PNEUMATIC HEIGHT-ADJUSTABLE LECTERN WITH KWIKBOOST EDGEPOWER™ CHARGING STATION

### Product Specifications

<b>Item Number</b>	<b>KBEP-CGR</b>
<b>Overall Dimensions</b>	8.3" D x 4.9" W x 5.2" to 6" H (based on desk clamp setting)
<b>Overall Dimensions (with battery inserted)</b>	10.3" x 4.9" W x 5.2" to 6" H (based on desk clamp setting)
<b>Desk Clamp Adjustment Range</b>	0.7" to 1.5"
<b>AC Outlet</b>	100V-120V, 60Hz, modified sine wave
<b>AC Outlet Continuous Output Power</b>	100W
<b>AC Outlet Peak Output Power</b>	120W (10 minutes)
<b>USB-A port</b>	5V/2.4A (12W) - Quick Charge 3.0 Technology
<b>USB-C PD port</b>	5V/2A (10W), 12V/1.5A (18W)
<b>Controls</b>	Power switch (turns AC outlet on and off)
<b>Device protection</b>	Temperature protection, short circuit protection, self-balancing algorithm, overcharge protection
<b>Output protection</b>	AC/USB outlet protection, power overflow protection, voltage underflow/overflow protection
<b>Shipping Method</b>	Ground
<b>Shipping Carton Dimensions</b>	1 carton; 11" W x 7" D x 8" H
<b>Shipping Weight</b>	3 lbs.

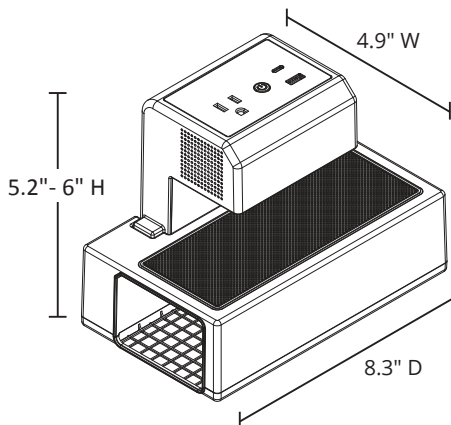

<b>Item Number</b>	<b>KBEP-BAT (Contains QTY 2)</b>
<b>Overall Dimensions</b>	9.1" D x 3.0" W x 2.1" H
<b>Capacity</b>	146.52Wh (18 cells)
<b>Cell Type</b>	18650 Li-ion battery (2200mAh at 3.7V)
<b>Life Cycles</b>	500 times (at higher than 80% of the initial capacity)
<b>Shelf Life</b>	1 year after first charge
<b>Battery Shipping Classifications</b>	UN 3480
<b>Battery Cell Recharge Time</b>	2 hours
<b>Input Protection</b>	Charging overflow protection, charging circuit protection
<b>Shipping Method</b>	Ground
<b>Shipping Carton Dimensions</b>	1 carton; 12" W x 6" D x 5" H
<b>Shipping Weight</b>	4 lbs.

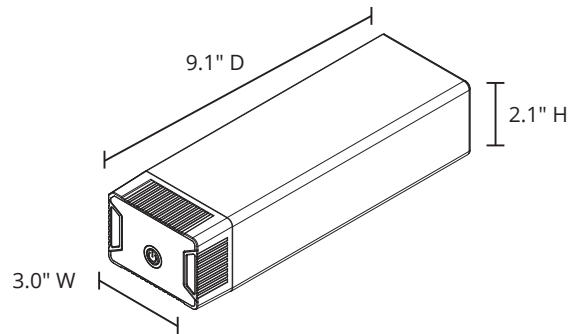

**To Order, Call Your Sales Representative or 800-323-4656**

**Certifications:**

	FCC	Prop 65	CPSC	UL	cULus	CSA	cETLus
Battery	•	•	•				•
Clamp	•	•	•				
Single Charger	•	•			•		



INNOVATIVE WORKSPACE PRODUCT SOLUTIONS