

ACT-32HR Remote Volume Control Handheld Transmitter

Key Features

- Robust, lightweight plastic housing.
- The unique multi-layered metal grille protects the capsule against impact, rolling and pop noise, ensuring clarity of sound.
- Interchangeable capsule module with premium condenser or dynamic options for easy and fast changeovers.
- Premium condenser capsules exhibit high fidelity, wide dynamic range, fast transient responses, good feedback rejection, accurate sound image characteristics, transparent sound quality and withstand maximum SPL.
- Reversible end-cap allows power on/off switch being locked to avoid accidental power-off during performance.
- Impact-resistant battery compartment holds 2 AA batteries.
- Backlit LCD displays various parameters and status.
- Stable PLL circuits. Automatically synchronized with the receiver's frequency by MIPRO's patented ACT™ function.
- Patented "built-in" antenna design.
- Interchangeable colored rings for microphone channel identification on stage.
- Industry's only digital master control can be adjusted manually or wirelessly via new ACT-32HR handheld transmitter microphone. (for MA-708 & MA-808 portables)
- High-efficiency circuitry design provides more than 16 hours of operation from 2 AA batteries (depending on the battery quality).

Microphone Capsules


MU-39	Dynamic Capsule
MU-59	Professional Dynamic Capsule
MU-70	Condenser Capsule
MU-80	Condenser Capsule
MU-90	Condenser Capsule

Accessories

MS-20	Desktop Microphone Tripod
MD-20	Handheld Transmitter Microphone Holder
RH-77a	Multi-Colored Rings
SW-20	Foam Windscreens

Technical Specifications

Frequency Range	UHF 480 – 934 MHz
Bandwidth	24 MHz
Oscillation Mode	PLL Synthesized
Channel Set-Up	ACT Sync
RF Output Power	10mW / 30mW (switchable)
Deviation	< ±40 kHz
Spurious Emissions	< -55 dBc
LCD Display	Group, Channel, Battery status & error codes
Max. SPL	140 dB SPL
Battery Type	2 AA alkaline
Operating Time	Min. 12 hours (Low Power)
Current Consumption	Approx. 92 mA
Dimensions (Ø × L)	51 × 234 mm / 2.0 × 9.2 "
Net Weight	Approx. 251 g / 8.9 oz

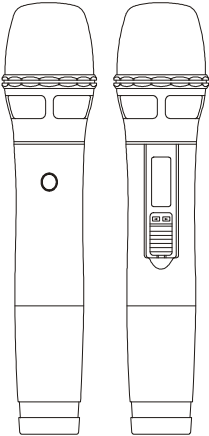

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com



MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw