

# MA-707 Portable Wireless PA System

## Key Features

- Delivers a powerful 100 Watts of audio output.
- Up to 2 optional diversity receiver modules with 16 auto-scannable frequencies.
- One-touch Scan for a clear, interference-free frequency set.
- One-touch ACT syncs the transmitter and receiver frequency automatically.
- Interference warning indicator.
- Built-in retractable handle and sturdy wheels for easy transport.
- Built-in storage compartment for up to 2 handheld or body pack transmitters.
- Optional modular digital audio player & recorder.
- Built-in AC switching power supply for universal usage and fast battery charge.
- 3 power modes: AC, rechargeable battery and external DC jack.

## Transmitters & Microphones


<b>ACT-32H   ACT-32HC</b>	Handheld Transmitter for MRM-70B   MRM-72B
<b>ACT-32T   ACT-32TC</b>	Bodypack Transmitter for MRM-70B   MRM-72B
<b>VT-22   ST-32   ET-32</b>	Instrument Transmitter for MRM-70B   MRM-72B
<b>ACT-24HC   ACT-24TC</b>	Handheld   Bodypack Transmitter for MRM-24
<b>ST-24   ET-24   MT-24   DM-100</b>	Instrument Transmitter for MRM-24
<b>ACT-70H   70HC   70T   70TC</b>	Handheld & Bodypack Transmitter for MRM-70W
<b>ACT-80H   80HC   80T   80TC</b>	Handheld & Bodypack Transmitter for MRM-80
<b>MM-107   MM-39   MM-59</b>	Wired Supercardioid Dynamic Microphone

## Accessories

<b>MB-70</b>	Sealed Lead-acid Rechargeable Battery (12V, 4.5AH)
<b>MB-80</b>	Lithium Iron Phosphate (LFP) Rechargeable Battery (12.8V)
<b>SC-70</b>	Storage Cover Bag
<b>MS-70</b>	Tripod Speaker Stand
<b>MA-707EXP</b>	Passive Extension Speaker
<b>MRM-24</b>	2.4 GHz Digital Receiver Module
<b>MRM-70B</b>	Single-Channel Diversity Receiver Module
<b>MRM-70W</b>	Wideband Single-Channel Diversity Receiver Module
<b>MRM-80</b>	Digitally Encrypted Single-Channel Diversity Receiver Module

## Technical Specifications

Portable PA	
Max. Power Output	100 Watts
Amplifier	Class AB
Sensitivity	Typical: 98 dB   Maximum: 111 dB
T.H.D.	< 1%
Frequency Response	50 Hz – 18 kHz
Speaker	8" full-range
Audio Inputs	Wired: XLR×1 & 6.3 mm (1/4")×1 Wireless: UP to 2 wireless microphones Line-In: Unbalanced 6.3 mm (1/4") jack
Audio Output	Unbalanced line 6.3 mm (1/4") jack
Extension Speaker	6.3 mm (1/4") Phone jack
Volume	Master and other individual controls
Controls	Tone control on wireless mics
Storage	2 handheld or bodypack transmitters
Installation	Speaker stand, flat surface or retractable handle & wheels
Power Supply	AC: Built-in 100 – 240 V AC switching power supply (Max. Power Consumption: 120 W) DC & Battery: 24 – 32 V DC, 12V/4.5AH rechargeable gel cell battery (MB-70×2) or optional MB-80×2
Charge Time	Up to 8 hours (automatic charging management)
Stand-by Time	Up to 8 hours
Battery Indicator	Single LED indicator
Dimensions (W × H × D)	310 × 445 × 240 mm / 12.2 × 17.5 × 9.4 "
Weight	Approx. 14.8 kg / 32.5 lbs, batteries included
Wireless System (optional)	
Receiver	1 or 2 MRM-70B   MRM-70W   MRM-80   MRM-24
Max. Receiver	Up to 2
Frequency Range	MRM-70B   MRM-70W   MRM-80: UHF 480 – 934 MHz (country dependent) MRM-24: 2.4 GHz
Installation	Plug-in Module
Antenna	Built-in
Audio Player (optional)	
Audio Player	CDM-2P   CDM-2BP   CDM-3AP
Installation	Plug-in Module

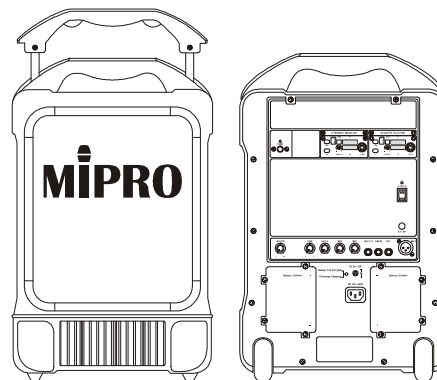

## MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan  
Tel: +886.5.238.0809 | Fax: +886.5.238.0803  
www.mipro.com.tw | mipro@mipro.com.tw