

ACT-32T Bodypack Transmitter

Key Features

- Lightweight, compact size with sturdy plastic housing.
- On the top features mute switch, mini-XLR connector and antenna.
- Backlit LCD displays various parameters and status.
- Innovatively designed battery cover allows easy access to operate buttons and prevents accidental operation.
- Mute button with remote-control jack for easy activation of mute function.
- Stable PLL circuits. Automatically synchronized with the receiver's frequency by MIPRO's patented ACT™ function.
- Can directly match to high-low input impedance for microphone or guitar without switching.
- Mini-XLR input with secure screw lock connector for lavalier / headworn mics and guitar.
- Adjustable belt clip allows wearing transmitter in up or down position.
- High-efficiency circuitry design provides 12~14 hours of operation from 2 AA batteries (depending on the battery quality).

Microphones


MU-13	Single-sided Earworn Microphone (beige)
MU-23	Omni-directional Headworn Microphone (beige, fixed connector)
MU-23d	Omni-directional Headworn Microphone (beige, detachable cont)
MU-210	Uni-directional Headworn Microphone (beige, fixed connector)
MU-210d	Uni-directional Headworn Microphone (beige, detachable cont.)
MU-53L MU-53LS	Uni-directional Lavalier Microphone (black beige)
MU-55L MU-55LS	Omni-directional Lavalier Microphone (black beige)
MU-53HN MU-53HNS	Uni-directional Headworn Microphone (black beige)
MU-55HN MU-55HNS	Omni-directional Headworn Microphone (black beige)

Accessories

ASP-30	Neoprene Sports Pouch
MJ-70	Remote Mute Switch
MU-40G	Instrument Cable
TC-18	Transmitter Shielding Case

Technical Specifications

Frequency Range	UHF 480 – 934 MHz
Bandwidth	24 MHz
Oscillation Mode	PLL Synthesized
Channel Set-Up	ACT Sync
RF Output Power	10 mW / 30 mW (switchable)
Deviation	< ± 40 kHz
Spurious Emissions	≤ -55 dBc
LCD Display	Group, Channel, Frequency, AF gain, Frequency band, RF power, Mute mode, Lock status, Battery status and error codes
Max. Input Level	0 dBV
Mute Connector	Optional MJ-70 remote mute switch
Battery Type	2 AA alkaline
Operating Time	Min. 12 hours
Current Consumption	High Power: approx. 161 mA ; Low Power: approx. 120 mA
Dimensions (W × H × D)	63 × 82 × 22 mm / 2.5 × 3.2 × 0.9 "
Net Weight	Approx. 83 g / 2.9 oz

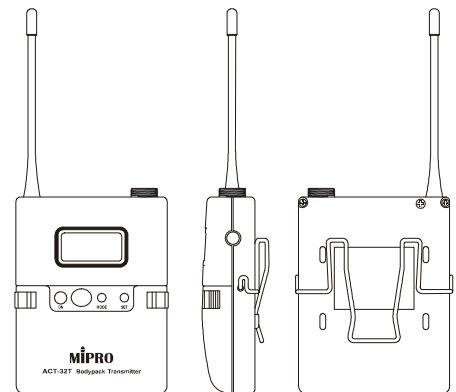

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com



MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw