

# MM-202B Gooseneck Microphone

## Key Features


- Ultra slim profile design for podiums, pulpit and lectern applications.
- Proprietary microphone mount design allows 110° up/down and 300° left/right angle adjustments.
- Shock isolation mount design minimizes handling and vibration noise.
- Multi-layered microphone grill minimizes pop noise.
- Can be connected to MJ-53 Condenser Microphone Adaptor and provides with 48V phantom power and used as a desktop gooseneck microphone.
- Unmatched high fidelity sound reproduction.

## Compatible Products

|                      |   |
|----------------------|---|
| <b>ACT-T series</b>  | Fits all ACT-T series bodypack transmitters                 |
| <b>ACT-TC series</b> | Fits all ACT-TC series rechargeable bodypack transmitters   |
| <b>BC-100</b>        | Wireless Boundary Microphone                                |
| <b>BC-100T</b>       | Rechargeable Wired / Wireless Conference Microphone         |
| <b>BC-100DT</b>      | Digital Rechargeable Wired / Wireless Conference Microphone |
| <b>MD-101</b>        | Bodypack Transmitter Holder Base                            |
| <b>MJ-53</b>         | Condenser Microphone Adaptor                                |

## Technical Specifications

|                    |  |
|--------------------|--|
| Capsule Module     | 10 mm Ø uni-directional condenser microphone |
| Frequency Response | 50 Hz – 18 kHz                               |
| Sensitivity        | -46 dBV ± 3 dBV / Pa (0 dB = 1 V / Pa)       |
| Maximum SPL        | 142 dB (typical, 1% T.H.D.)                  |
| Plug               | TA4F 4-pin connector                         |
| Length             | 370 mm / 14.5 "                              |
| Color              | Black  |
| Weight             | Approx. 34 g / 1.2 oz                        |

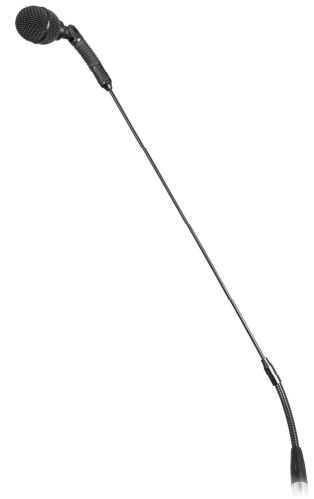

### MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan  
Tel: +886.5.238.0809 | Fax: +886.5.238.0803  
www.mipro.com.tw | mipro@mipro.com.tw