

MT-24A 2.4 GHz Digital Interlinking Transmitter

Introduction

The MT-24A is a latest 2.4GHz digital transmitter amplifier, designed for transmitting the output signals of the microphones, instruments and other audio equipment.

Key Features

- 12 preset channels and 16 ID codes selected by a push of button.
- Switchable high (<100 mW) and low power (<10 mW).
- Switchable input Mic/Line level.
- Supplies +48 V phantom power for condenser microphones.

Related Products


ACT-2400 Series	2.4 GHz Receivers
-----------------	-------------------

Accessories

FB-71	Rack Mount Kit
FB-72	Rack Mount Kit

Technical Specifications

Frequency Range	2.4 – 2.4835 GHz
Modulation Type	2.4 GHz digital modulation
Output Power	Low: < 10 mW, High: < 100 mW
Frequency Response	20 Hz – 20 kHz
Audio Input	XLR / 6.3 mm combo jack
Input Sensitivity	Mic or Line level
Input Sensitivity Control	Adjustable control for input gain
Phantom Power Switch	ON / OFF
Panel Display	AF Meter, AF Limit, RF Hi/Low ,Channel, ID
Antenna Connector	1 × TNC (50Ω impedance)
Power Supply	12 – 15 V DC
Dimensions (W × H × D)	210 × 44 × 206 mm 8.3 × 1.7 × 8.1 "
Weight	Approx. 1.0 kg 2.2 lbs

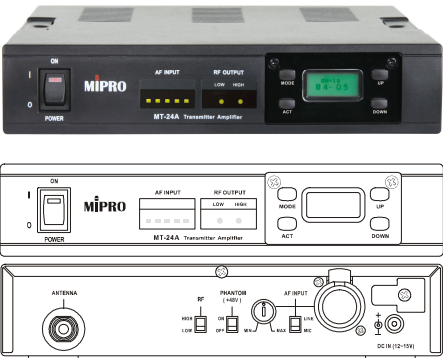

MIPRO Electronics Co., Ltd
Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw