



# ML7000 Series

## METALLURGICAL MICROSCOPES

### INFINITY OPTICAL SYSTEM

An infinity optical system for reflected light brightfield and simple polarization technique.

### Features

#### Eyepieces:

Paired DIN KHW10X super wide 20mm field of view eyepieces.

#### Viewing head:

The ML7000 Series Metallurgical microscope is equipped with either an erect image binocular or non-erect image trinocular viewing head inclined at 30° and rotatable through 360° for comfortable viewing. Each eyetube is provided with a graduated diopter adjustment. Interpupillary distance is adjustable between 52mm and 72mm (Erect image trinocular optional.)

#### Objective Changer:

Smooth operating, revolving quintuple ball-bearing nosepiece.

#### Objectives:

Infinity corrected, S.Planachromat objectives, M4X/0.10, M10X/0.25, M20X/0.40, and M40X/0.65

#### Stage:

Rectangular mechanical stage 172mm x 130mm top plate with 100mm x 100mm travel. Equipped with precision ball bearing guides and low position drop down coaxial controls for X-Y movement.

#### Illuminator:

Vertical illuminator with full Koehler design equipped with 6V 30W Halogen light source, infinity system lens, field iris, aperture iris and filter slots. Capable of brightfield or simple reflected light polarization technique. Includes blue clear, green clear, polarizing and neutral density filter (ND8) in mounts. Transformer and variable rheostat control are built in the microscope base.

#### Focusing Movement:

Coaxial low positioned coarse and fine focus controls, graduated to 2 microns per division, are fitted with tension adjustment and safety auto stop. The focus range is 35mm. The movement runs in extra wide precision ball-bearing hardened steel tracks.

#### Size and Weight:

ML7000 Binocular 200mm (W) x 270mm (D) x 472mm(H), Net weight 6.8kg.  
ML7100 Trinocular 200mm (W) x 270mm (D) x 500mm(H), Net weight 6.9kg.



ML7000



# Components & Accessories

## Viewing Heads

- MA657/05** Binocular Head, erect image, with quartz depolarizer. (Included with ML7000)  
**MA603/05** Trinocular Head, non-erect image, with quartz depolarizer. A two position beam splitter directs 100% of the light to the eyepieces or directs 80% of the light to the trinocular tube and 20% of the light to the eyepieces. (Included with ML7100)  
**MA655/05** Inclined Trinocular Head, erect image, with quartz depolarizer. A two position beam splitter directs 100% of the light to the eyepieces or directs 100% of the light to the trinocular tube.

## Eyepieces

- MA407** KHW Compensating 10X Eyepiece, Field number 20mm (Included).  
**MA408** HWF15X Eyepiece, High eyepoint, Field number 12.2mm.  
**MA489** HWF12.5X Eyepiece, High eyepoint, Field number 15mm.  
**MA409** HWF20X Eyepiece, High eyepoint, Field number 9.2mm.

## Objectives (Infinity corrected)

- MA336** MET 4X/0.10 S.Planachromat, W.D.20mm. (Included)  
**MA330** MET 5X/0.10 S.Planachromat, W.D.20mm.  
**MA337** MET 10X/0.25 S.Planachromat, W.D.7.48mm. (Included)  
**MA338** MET 20X/0.40 S.Planachromat, W.D.5.28mm. (Included)  
**MA339** MET 40X/0.65 S.Planachromat, W.D.0.81mm. (Included)  
**MA344** MET 50X/0.70 S.Planachromat, W.D.0.36mm.  
**MA349** MET LWD50/0.50 S.Planachromat, W.D.6.0mm.  
**MA329** MET 60X/0.85 S.Planachromat, W.D.0.38mm.  
**MA328** MET 100X/0.75 S.Planachromat, W.D.0.27mm.

## Illuminators (With infinity tube lens FL=200mm)


- MA651/100** Vertical Illuminator 6V 30W Halogen, full Koehler design for bright-field illumination and simple polarization techniques. Main voltage : 115 Volts.  
**MA651/200** Vertical Illuminator 6V 30W Halogen, full Koehler design for bright-field illumination and simple polarization techniques. Main voltage : 220/240 Volts.  
**MA651/05** Transformer with intensity control for MA651/100, 115V.  
**MA651/15** Transformer with intensity control for MA651/200, 220/240V.

## Filters

- MA475/05** Blue clear filter, 20mm diameter in mount for MA651. (Included)  
**MA476** Green clear filter, 20mm diameter in mount for MA651. (Included)  
**MA497** Polarizing filter, 20mm diameter in mount for MA651. (Included)  
**MA198** ND8 Neutral density filter, 20mm diameter in mount for MA651. (Included)

## Other Items

- MA326** Spare halogen lamp, 6V 30W.  
**MA327** Fuse 3A.  
**MA711** Dust cover.

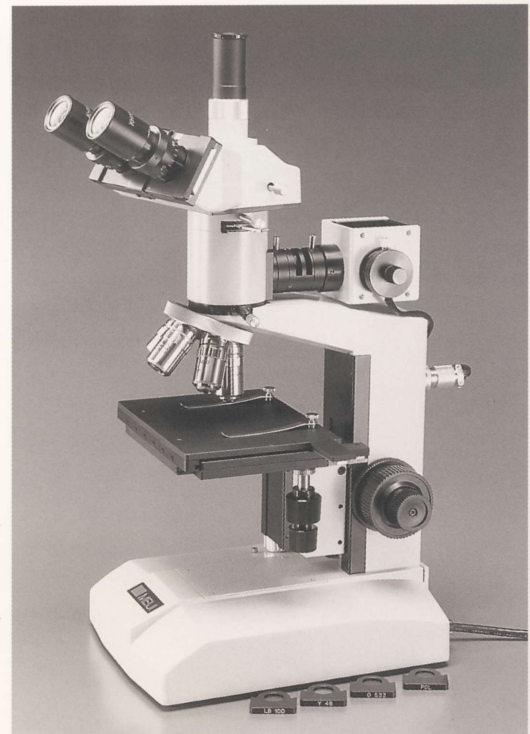

ML7100

## Accessories For Measurement

- MA414** Filar Micrometer Eyepiece with inclined monocular head.  
**MA255** Linear micrometer, 10mm divided into 100 units, 21mm diameter for KHW 10X eyepiece.  
**MA256** Linear micrometer, 5mm divided into 100 units, 21mm diameter for KHW 10X eyepiece.  
**MA284** Cross-line reticule, 21mm diameter for KHW10X eyepiece.  
**MA540** Cross-line with 0.1mm graduations, 21mm diameter for KHW10X eyepiece.  
**MA292** Metal stage micrometer, 1mm divided into 100 units, 0.01mm.

## ORDERING INFORMATION FOR ML7000 Series

Model	Body	Eyepieces	Objectives	Illuminator
ML7000	Binocular (Erect Image)	KHW10X 20mm field of view	S.PLAN MET 4X, MET 10X, MET 20X, MET 40X	Vertical Koehler, 6V 30W halogen with clear blue, clear green, neutral density (ND8) and polarizing filter in mounts.
ML7100	Trinocular (Non-erect Image)			

Supplied in styrofoam case with dust cover and operation manual.

Note: Please specify voltage when ordering.

Agent :



**MEIJI TECHNO AMERICA**

5895 Rue Ferrari, San Jose, CA 95138, USA

Tel : 408-226-3454 Fax : 408-226-0900

Toll Free : 1-800-832-0060

E-mail : info@meijitechno.com

http://www.meijitechno.com



**MEIJI TECHNO CO., LTD.**

322-1, Chikumazawa, Miyoshi-machi

Iruma-gun, Saitama 354-0043, Japan

Phone : (0)49-259-0111 • Fax : (0)49-259-0113

e-mail : meiji@meijitechno.co.jp

http://www.meijitechno.co.jp

