



Mastercool[®] Inc.
"World Class Quality"

1 ASPEN DRIVE, RANDOLPH, NJ 07869
PHONE: 973-252-9119 / FAX: 973-252-2455
WEB: WWW.MASTERCOOL.COM

69372 R134a/R1234yf COMPLETE A/C RECOVERY SET



 **COMPATIBLE WITH COMBUSTIBLE GASES**

SPECIFICATIONS:

- 115 V / 60 Hz
- 1/2 HP Oil Less Compressor
- Recovery Rate:
R134a/R1234yf
Direct vapor up to .537 lb/min
Direct liquid up to 4.72 lb/min
Push pull up to 11.68 lb/min
- Operating Temperature:
32 to 122°F
- Case Material:
HDPE (High Density
Polyethylene)
- Compatible Refrigerants:
All CFC, HCFC, and HFC's

Mastercool introduces the twin turbo dual complete recovery machine for R134a and R1234yf refrigerants. The 69372 incorporates a spark-free compressor and enhanced features to allow for maximum recovery capacity while at the same time decreasing size and weight. The design of the double piston compressor and cooling by the largest fan and condenser in the market makes the 69372 R134a/R1234yf complete recovery unit the most complete solution to your R134a and R1234yf recovery needs.

- Built with the safest spark-free components
- Includes all hoses and couplers needed to recover, cleanse and remove the oil from R134a and R1234yf automotive A/C systems as well as an extra filter dryer for replacement
- Easily convert between R134a and R1234yf with the included dual brass manifold gauge set, couplers and conversion fittings
- 30 lb DOT tank for R134a and 30 lb DOT tank for R1234yf refrigerants included with each unit. Each 30 lb DOT tank has a float switch that connects to the 69372 to shut off the recovery when the tank is 80% full



Mastercool[®] Inc.
"World Class Quality"

1 ASPEN DRIVE, RANDOLPH, NJ 07869
PHONE: 973-252-9119 / FAX: 973-252-2455
WEB: WWW.MASTERCOOL.COM

ITEMS AVAILABLE FOR USE WITH THE 69372...

55900

INTELLASENSE II REFRIGERANT LEAK DETECTOR

<< Design certified by Intertek to meet J2791 (R134a), J2913 (R1234yf) and EN 14624 >>

- Refrigerants: Detects all refrigerants (CFC's, HCFC's, & HFC's and blends)
- Sensor Life: 2000 hours
- Sensing Element: Heated tin oxide
- Operating Temperature Range: 0 to 140°F
- Response Time: Less than 1 second



55900

90066-B-SF

6 CFM SPARK-FREE SINGLE STAGE VACUUM PUMP

- No. of Stages: 1
- Free Air Displacement: 6 CFM
- Ultimate Vacuum: 80 Microns
- Pump Motor: 1/3 HP
- Pump Speed: 1720 RPM



90066-B-SF

53134-A

REFILLABLE DYE INJECTOR FOR R134a

- R134a 13mm Connection
- Anodized Aluminum




53134-A

53123-YF

HEAVY DUTY MANUAL OIL INJECTOR FOR R1234YF

- Heavy duty, anodized aluminum, 2 oz container with dye scales represented in 1/10 ounce, 1/4 ounce and milliliters
- Nylon barrier blue hose meets J2888, EPA, SAE and UL standards
- R1234yf low side coupler with extended disconnect sleeve and meets SAEJ639 and J2888

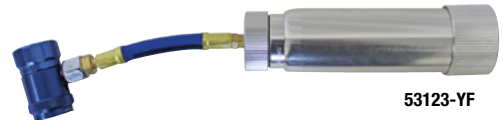

53123-YF

98210-A

ACCU-CHARGE II ELECTRONIC REFRIGERANT SCALE

- Capacity: 243 lbs (110 kg)
- Accuracy: $\pm 0.05\%$ of reading
- Resolution: 0.05 lb / 0.5 oz / 0.01 kg
- Automatic Shut Off: 3 hrs



98210-A

69LEGEND-P

LEGEND SERIES™ R1234yf & R134a REFRIGERANT ANALYZER WITHOUT BLUETOOTH® / WITH PRINTER

- Quickly and accurately determines refrigerant purity
- Displays percentage purity of R1234yf, R134a, R12, R22 and Hydrocarbons
- Displays % air in pure R1234yf & R134a



69LEGEND-P