


Toggle Clamps

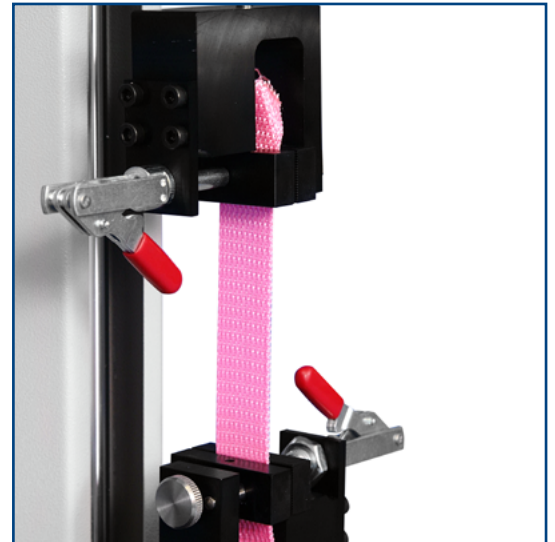

Description

Toggle clamps are fitted with a lever to allow rapid, easy loading of specimens. They are available fitted with either flat or serrated jaw faces to securely grip most materials.

Supplied individually.

Applications


Used for testing of:

- fabric
- woven fabrics
- tapes
- polymers


Specifications

Part No.	Load Capacity	Thread 1	Jaw Type	Jaw Opening	Jaw Width	Height	Weight
432-177	500 N / 50 kgf / 110 lbf	10/32 UNF	Flat	6 mm (0.24")	50 mm (1.97")	74 mm (2.19")	400 g (0.88 lb)
432-176	500 N / 50 kgf / 110 lbf	10/32 UNF	Serrated	7 mm (0.28")	50 mm (1.97")	74 mm (2.19")	400 g (0.88 lb)

Dimensions mm

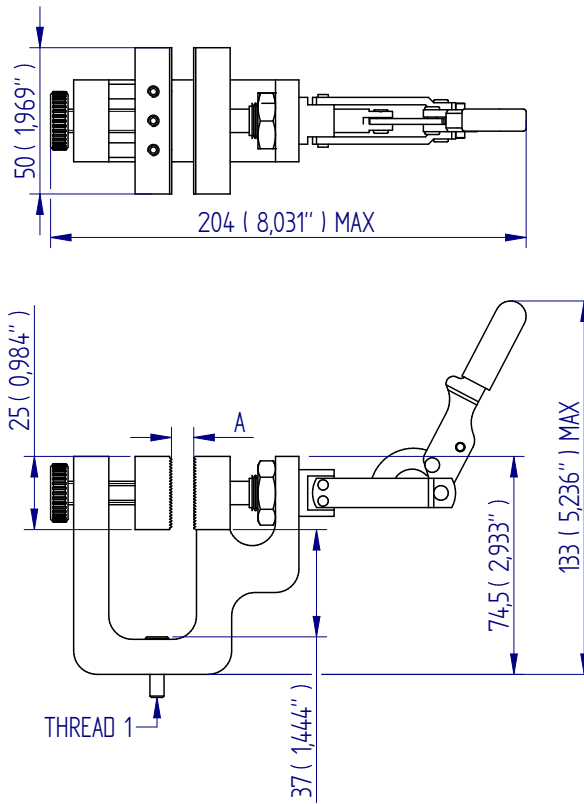

FS 58553

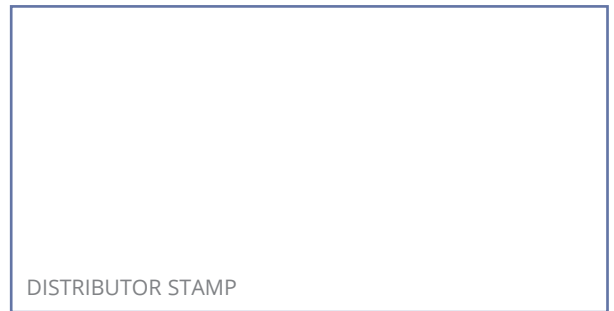

DISTRIBUTOR STAMP

Mecmesin reserves the right to alter equipment specifications without prior notice.
E&OE

Head Office
Mecmesin Limited

w: www.mecmesin.com
e: sales@mecmesin.com

France
Mecmesin France

w: www.mecmesin.com/fr
e: contact@mecmesin.fr

Germany
Mecmesin GmbH

w: www.mecmesin.com/de
e: info@mecmesin.de

North America
Mecmesin Corporation

w: www.mecmesin.com
e: info@mecmesincorp.com

Asia
Mecmesin Asia Co., Ltd

w: www.mecmesin.com/th
e: sales@mecmesinasia.com

China
Mecmesin (Shanghai) Pte Ltd

w: www.mecmesin.com/zh
e: sales@mecmesin.cn