

Clevis Grips



Description

Clevis grips feature a removable pin which can be inserted into the U-shaped clevis. The specimen is usually pre-conditioned with a hole or eyelet through which the clevis pin is passed to secure it in place. Models 432-400 and 432-443 have a clevis pin with quick-release detents to speed up inserting and removing the pin.


Applications

Used for testing heavy duty tension springs or for securing odd-shaped parts which have an eyelet.

Specifications

Part No.	Load Capacity	Thread 1	Width (B)	Pin Diameter (ØD)	Length (C)	Weight
432-403	500 N / 50 kgf / 110 lbf	10-32 UNF	5 mm (0.20")	5 mm (0.20")	26 mm (1.02")	13 g (0.03 lb)
432-216	500 N / 50 kgf / 110 lbf	M6	6 mm (0.20")	6 mm (0.24")	31 mm (1.22")	13 g (0.03 lb)
432-400	2.5 kN / 250 kgf / 550 lbf	M8	8 mm (0.31")	8 mm (0.31")	42 mm (1.65")	90 g (0.20 lb)
432-443	5 kN / 500 kgf / 1100 lbf	M12	12 mm (0.47")	12 mm (0.47")	62 mm (2.44")	250 g (0.55 lb)

Dimensions mm (inch)

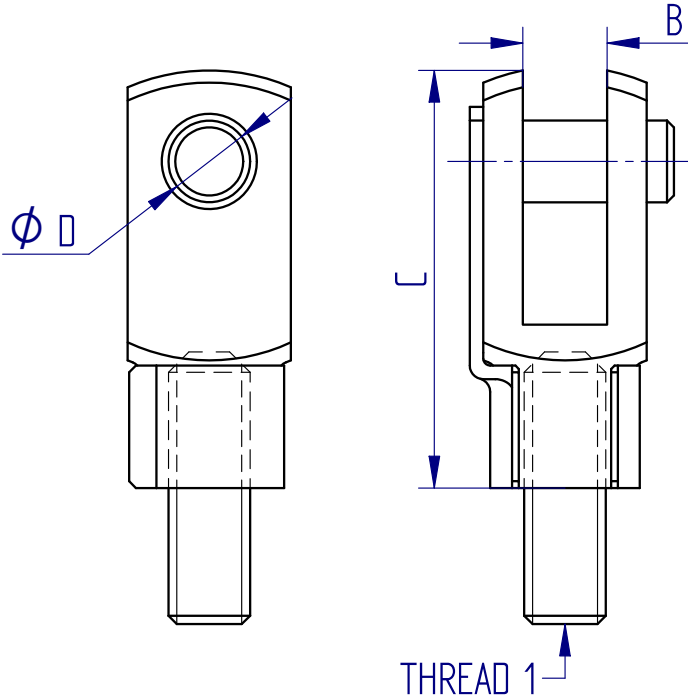

FS 58553

DISTRIBUTOR STAMP

Mecmesin reserves the right to alter equipment specifications without prior notice.
E&OE

Head Office
Mecmesin Limited

w: www.mecmesin.com
e: sales@mecmesin.com

France
Mecmesin France

w: www.mecmesin.com/fr
e: contact@mecmesin.fr

Germany
Mecmesin GmbH

w: www.mecmesin.com/de
e: info@mecmesin.de

North America
Mecmesin Corporation

w: www.mecmesin.com
e: info@mecmesincorp.com

Asia
Mecmesin Asia Co., Ltd

w: www.mecmesin.com/th
e: sales@mecmesinasia.com

China
Mecmesin (Shanghai) Pte Ltd

w: www.mecmesin.com/zh
e: sales@mecmesin.cn