


Puncture Test Jig

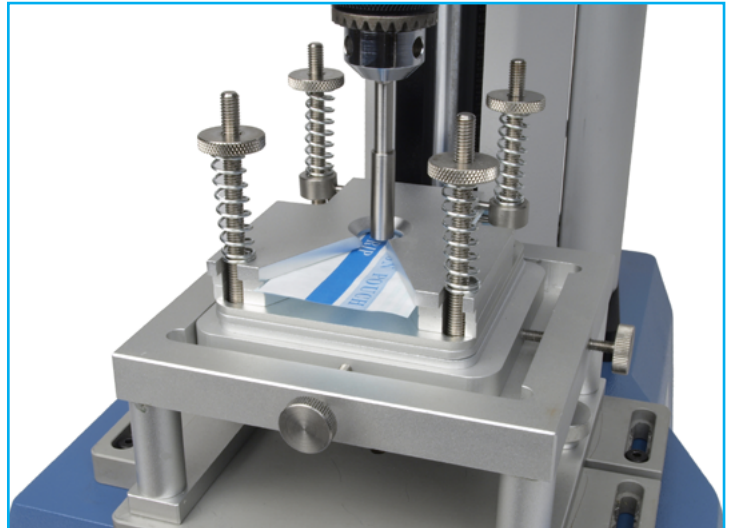

Description

This jig is designed also to accommodate spherical or irregular samples. Three sizes of holding plate are supplied.

Applications


Used to determine the puncture resistance properties of:

- films
- food products

Specifications

Part No.	Load Capacity	Max. Sample Diameter Ø		Weight
432-243	200 N / 20 kgf / 45 lbf	—	—	757 g (1.66 lb)
432-244	200 N / 20 kgf / 45 lbf	47 mm	1.85"	693 g (1.52 lb)

FOLLOWED BY INCHES: MM (IN")

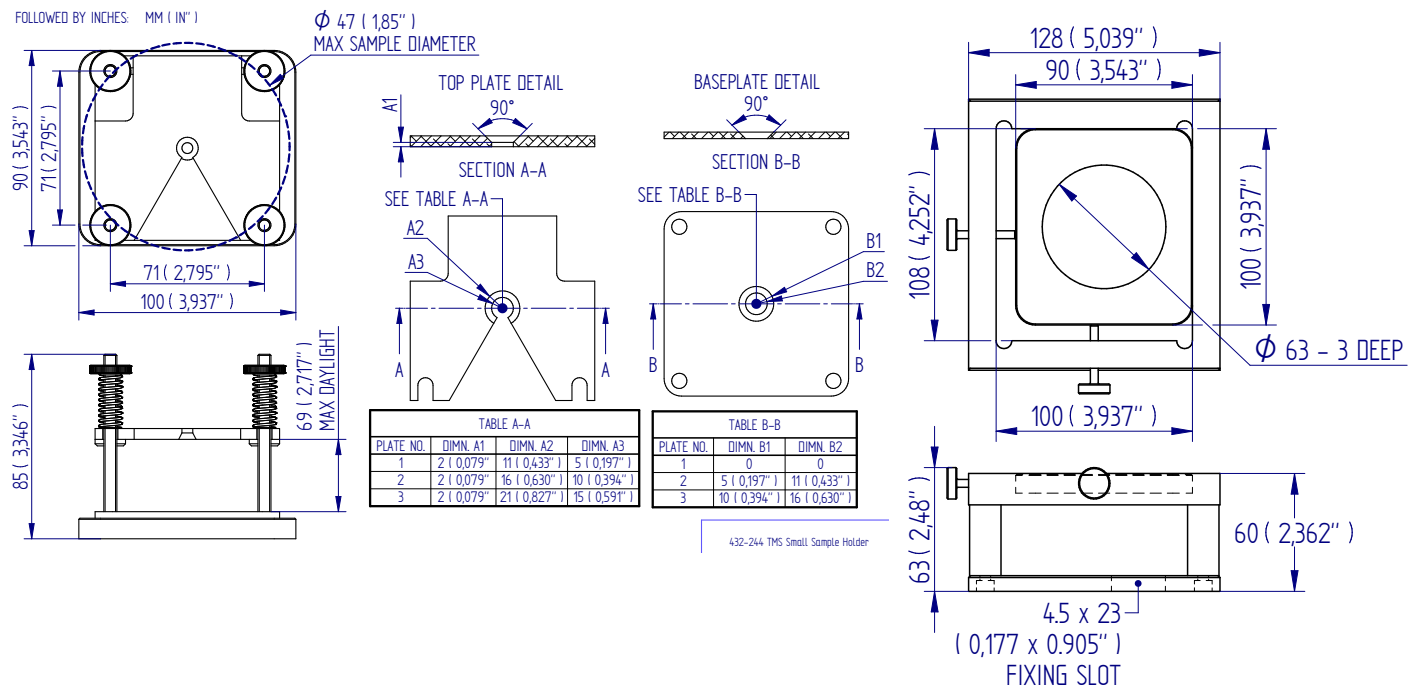

432-244

432-243



FS 58553

003

DISTRIBUTOR STAMP

Mecmesin reserves the right to alter equipment specifications without prior notice.
E&OE

Head Office
Mecmesin Limited

w: www.mecmesin.com
e: sales@mecmesin.com

France
Mecmesin France

w: www.mecmesin.com/fr
e: contact@mecmesin.fr

Germany
Mecmesin GmbH

w: www.mecmesin.com/de
e: info@mecmesin.de

North America
Mecmesin Corporation

w: www.mecmesin.com
e: info@mecmesincorp.com

Asia
Mecmesin Asia Co., Ltd

w: www.mecmesin.com/th
e: sales@mecmesinasia.com

China
Mecmesin (Shanghai) Pte Ltd

w: www.mecmesin.com/zh
e: sales@mecmesin.cn

www.mecmesin.com

DS-1027-01