


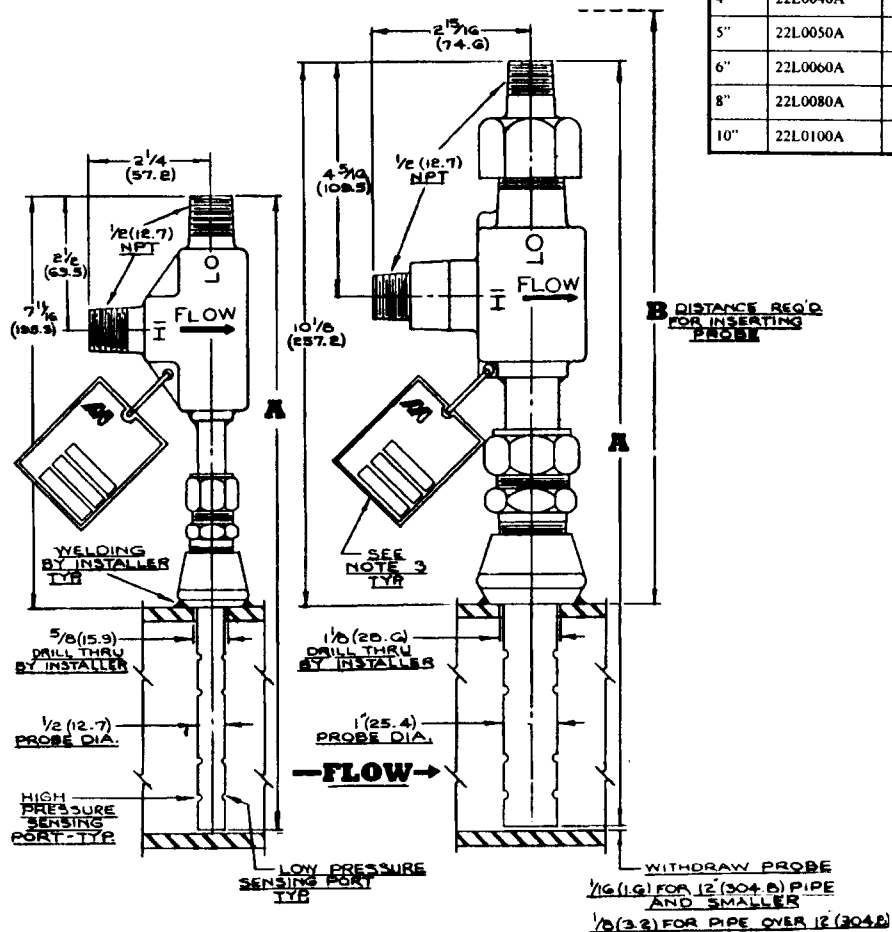

1/2" DIAMETER SERIES 22L ACCUTUBE						
NOM. PIPE SIZE	MODEL NO.	MAX ΔP	A		B	WGT LBS
2"	22L0020A	1064	9.812"	(249.2)	10.812" (274.6)	2.30
2.5"	22L0025A	713	10.281"	(261.1)	11.281" (286.5)	2.32
3"	22L0030A	510	10.938"	(277.8)	11.938" (303.2)	2.34
3.5"	22L0035A	400	11.438"	(290.5)	12.438" (315.9)	2.36
4"	22L0040A	328	11.938"	(303.2)	12.938" (328.6)	2.37
5"	22L0050A	230	13.000"	(330.2)	14.000" (355.6)	2.41
6"	22L0060A	163	14.062"	(357.2)	15.062" (382.6)	2.45
8"	22L0080A	100	16.000"	(406.4)	17.000" (431.8)	2.52
10"	22L0100A	66	18.062"	(458.8)	19.062" (484.2)	2.59

1" DIAMETER SERIES 22L ACCUTUBE						
NOM. PIPE SIZE	MODEL NO.	MAX ΔP	A		B	WGT LBS
6"	22L0060B	465	16.500"	(419.1)	17.812" (452.4)	6.66
8"	22L0080B	289	18.438"	(468.3)	19.750" (501.7)	6.86
10"	22L0100B	192	20.500"	(520.7)	21.812" (554.0)	7.08
12"	22L0120B	140	22.500"	(571.5)	23.812" (604.8)	7.29
14"	22L0140B	117	23.688"	(601.7)	25.000" (635.0)	7.42
16"	22L0160B	90	25.625"	(650.9)	26.938" (684.2)	7.62
18"	22L0180B	72	27.562"	(700.1)	28.875" (733.4)	7.83
20"	22L0200B	59	29.562"	(750.9)	30.875" (784.2)	8.04
22"	22L0220B	54	31.750"	(806.5)	33.062" (839.8)	8.27
24"	22L0240B	41	33.750"	(857.3)	35.062" (890.6)	8.45
26"	22L0260B	38	35.750"	(908.1)	37.062" (941.4)	8.70
28"	22L0280B	35	37.750"	(958.9)	39.062" (992.2)	8.91
30"	22L0300B	27	39.750"	(1009.7)	41.062" (1043.0)	9.12
32"	22L0320B	25	41.750"	(1060.5)	43.062" (1093.8)	9.30
34"	22L0340B	23	43.750"	(1111.3)	45.062" (1144.6)	9.51
36"	22L0360B	18	45.750"	(1162.1)	47.062" (1195.4)	9.72
42"	22L0420B	13	51.750"	(1314.5)	53.062" (1347.8)	10.38

GENERAL NOTES:

- STANDARD PRODUCT DESIGN IS FOR SCH 40 PIPE ON 20" LINE SIZE AND SMALLER, AND STANDARD WEIGHT PIPE ON LARGER LINE SIZE. THE ABOVE PROBE LENGTHS ARE NOMINALLY THE SAME FOR DUCT APPLICATIONS.
- ALL DIMENSIONS ARE IN INCHES. NUMBERS IN PARENTHESIS () ARE THE EQUIVALENT VALUE IN MILLIMETERS.
- CORROSION RESISTANT TAG SHOWS MODEL NO., SERIAL NO., AND SIZE. MINIMUM, NORMAL AND MAXIMUM DESIGN FLOW, TAG NO. AND METERED FLUID ARE IDENTIFIED AS REQUIRED.
- FOR VALVE OPTIONS SEE MERIAM ACCUTUBE PRODUCT CATALOG OR ACCOMPANYING VALVE DRAWING.
- REFERENCE MERIAM INSTALLATION MANUAL, FILE NO. 957-440.
- MATERIAL MOUNTING
 PROBE 316 L SST THREDOLET C.S. (STD) ☐ 316 S.S. ☐ P.V.C. ☐
 HEAD CF3M SST SADDLE CLAMP ☐
 PACKING GLAND DUCT FLAT - C.S. ☐ 316 S.S. ☐
 316 S.S. ROUND - C.S. ☐ 316 S.S. ☐
- REFERENCE ENGINEERING DRAWING D70720

Meriam Instrument

ACCUTUBE HIGH PRESSURE SERIES - 22L
SINGLE MOUNT

FILE NO. 957-22L:420-6