



Item# \_\_\_\_\_

Job \_\_\_\_\_

## SUPER ERECTA SHELF® DUNNAGE RACKS – Stationary & Mobile

- **Efficient Storage:** The low profile of Metro dunnage racks makes it easy to store large, bulky items off the floor without taking valuable shelf space.
- **Removable Wire Mat:** Fits top support frame. Lifts off for thorough cleaning. Offset wire design raises mat above post caps, preventing items from snagging or tearing. (Units without mat offered also.)
- **Super Erecta Shelf® Design:** Provides fast, secure assembly without the use of any special tools.
- **Available Options:** Chrome-plated, Metroseal 3™ or selected sizes in stainless steel.



Stationary Dunnage Racks With Mat

### Stationary Dunnage Racks With Wire Mat

- **Convenient:** Lower support frame is open in front – no need to move the rack to clean beneath it. Open wire grid minimizes dust and moisture accumulation on mat.
- **Leveling Bolts:** Compensate for surface irregularities.




Stationary Dunnage Racks Without Mat

### Stationary Dunnage Racks Without Wire Mat

- **Available in Four Sizes and Two Finishes:** Chrome and Metroseal 3™.

### Mobile Dunnage Racks

- **Maneuverable:** Two swivel casters and two swivel/brake casters provide excellent maneuverability plus manageability. Casters are 5" (127 mm), non-marking polyurethane tread, designed for heavy-duty use.

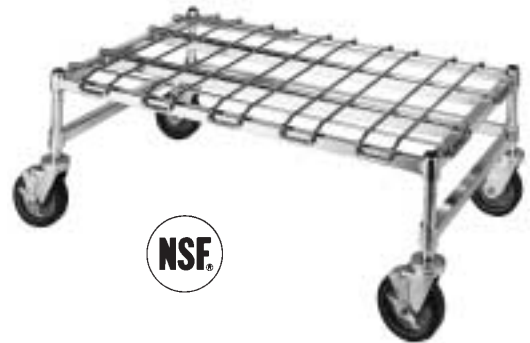

Mobile Dunnage Racks



InterMetro Industries Corporation  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com

Job \_\_\_\_\_

# SUPER ERECTA SHELF® DUNNAGE RACKS – Stationary & Mobile



- **Construction:** Top and lower support frames are made of 1" square tubing. Removable offset mat consists of 5/16" diameter wire.
- **Heights:** Stationary dunnage racks are 14 1/2" high including cap and leveling bolt. Mobile dunnage racks are 14" high.

## DIMENSIONS:

### Stationary Dunnage Racks With Wire Mat

Width		Length		Approx. Pkd. Wt.		Cat. No.	Cat. No.	Cat. No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	Chrome	Metroseal 3	Stainless
18	455	24	610	22.1	9.9	HP31C	HP31K3	
18	455	30	760	24.8	11.2	HP32C	HP32K3	
18	455	36	910	29.7	13.4	HP33C	HP33K3	HP33S
18	455	48	1220	38.3	17.2	HP35C*	HP35K3*	HP35S*
24	610	24	610	27.6	12.4	HP51C	HP51K3	
24	610	30	760	29.9	13.5	HP52C	HP52K3	
24	610	36	910	35.6	16.0	HP53C	HP53K3	HP53S
24	610	48	1220	42.0	18.9	HP55C*	HP55K3*	HP55S*

Maximum distributed static load capacity 1600 lbs. except on units marked \* which have a 1300 lb. capacity.

### Dunnage Racks Without Wire Mat

Width		Length		Approx. Pkd. Wt.		Cat. No.	Cat. No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	Chrome	Metroseal 3
18	455	36	910	21	9.5	HP33TFC	HP33TFK3
18	455	48	1220	27	12.2	HP35TFC	HP35TFK3
24	610	36	910	26	11.8	HP53TFC	HP53TFK3
24	610	48	1220	29	13.2	HP55TFC	HP55TFK3

### Mobile Dunnage Racks

Width		Length		Approx. Pkd. Wt.		Cat. No.	Cat. No.	Cat. No.
(in.)	(mm)	(in.)	(mm)	(lbs.)	(kg)	Chrome	Metroseal 3	Stainless
18	455	36	910	41.7	18.9	MHP33C	MHP33K3	MHP33S
18	455	48	1220	50.2	22.8	MHP35C	MHP35K3	MHP35S
24	610	36	910	47.6	21.6	MHP53C	MHP53K3	MHP53S
24	610	48	1220	54.0	24.5	MHP55C	MHP55K3	MHP55S

Maximum distributed static load capacity 800 lbs.

**NOTE:** These units are designed for only the 5HP and 5HPB casters, which are shipped assembled with special posts.

**NOTE:** For more information on Metroseal 3, refer to sheet #10.10a.

All Metro Catalog Sheets are available on our Web Site: [www.metro.com](http://www.metro.com)



### InterMetro Industries Corporation

North Washington Street, Wilkes-Barre, PA 18705  
Phone: 570-825-2741 • Fax: 570-825-2852

For Product Information Call: 1-800-433-2232  
Visit Our Web Site: [www.metro.com](http://www.metro.com)

L02-023  
Printed in U.S.A. Rev. 2/03

Information and specifications are subject to change without notice. Please confirm at time of order

Copyright © 2003 InterMetro Industries Corp.

