

Convertible Linen Truck Standard Duty



DESCRIPTION

Convertible Linen Truck Standard Duty – This instruction sheet covers assembly procedure for following models CLTS2460C, CLTS2460S, CLTS2448C.

Convertible Linen Truck Standard Duty

TWO PEOPLE REQUIRED TO ASSEMBLE UNIT

A

Markings

Front Post with Black Markings (x2)

Rear Post with Red Markings (x2)

NOTE: Retain the hardware to install Dolly Assembly.

B

Sleeve bead snap into Post Groove

C

First Groove (Colored Marking) (x4)

D

Rear Side of Bottom Shelf

Front Side of Bottom Shelf

E

Black Marked Posts

Red Marked Posts

F

Stand the Unit Upright

G

All Corners

H

Visible Sleeve Above Shelf Corner

I

Retaining Ring (x4)

J

Red Colored Groove #22 on Rear Posts (x2)

Black Colored Groove #23 on Front Posts (x2)

Folding Shelf

NOTE: Note the one inch pitch from front to back of the folding shelf.

REAR






FRONT

K






REPEAT STEPS G-H-I

2

L01-021

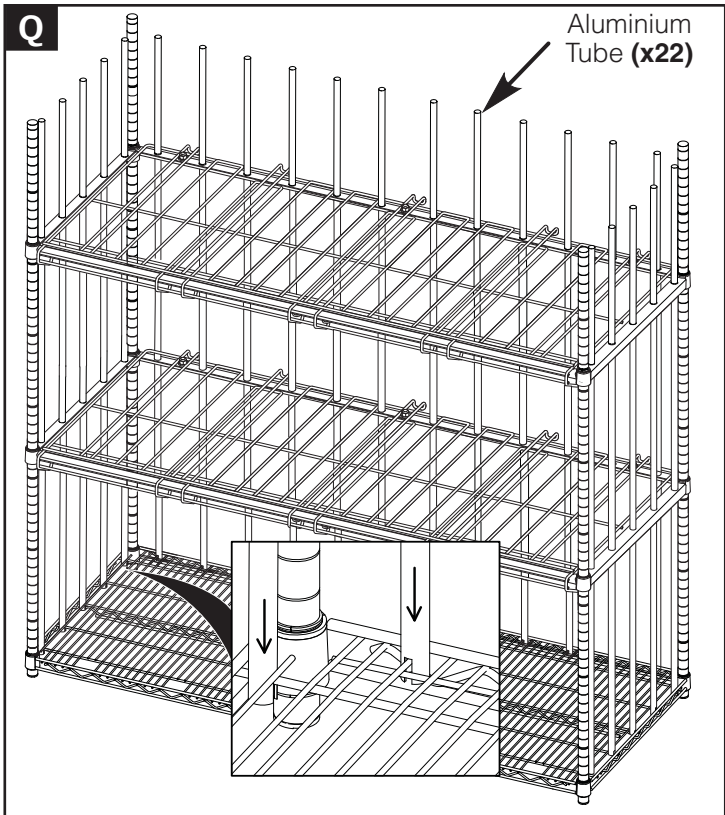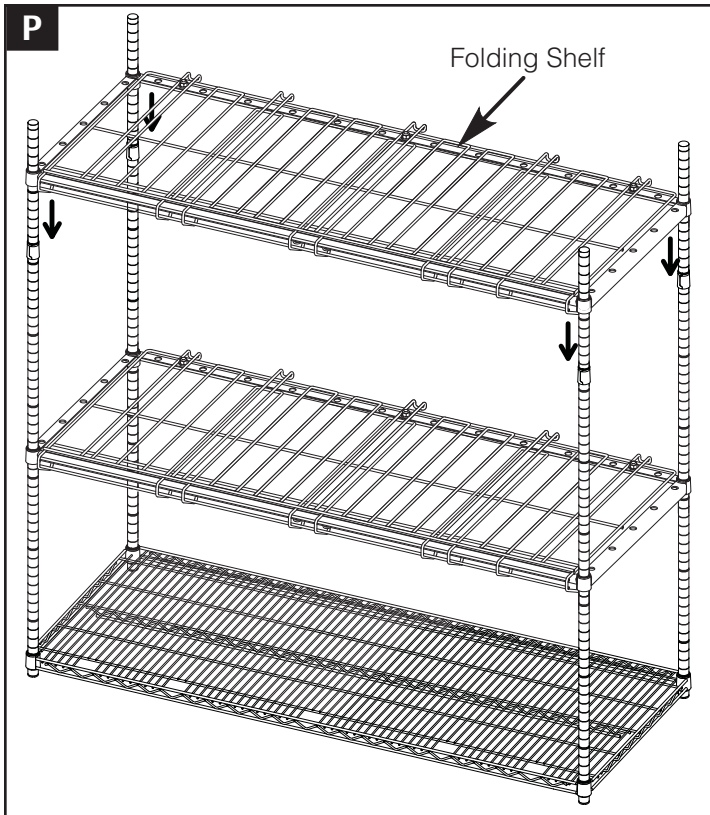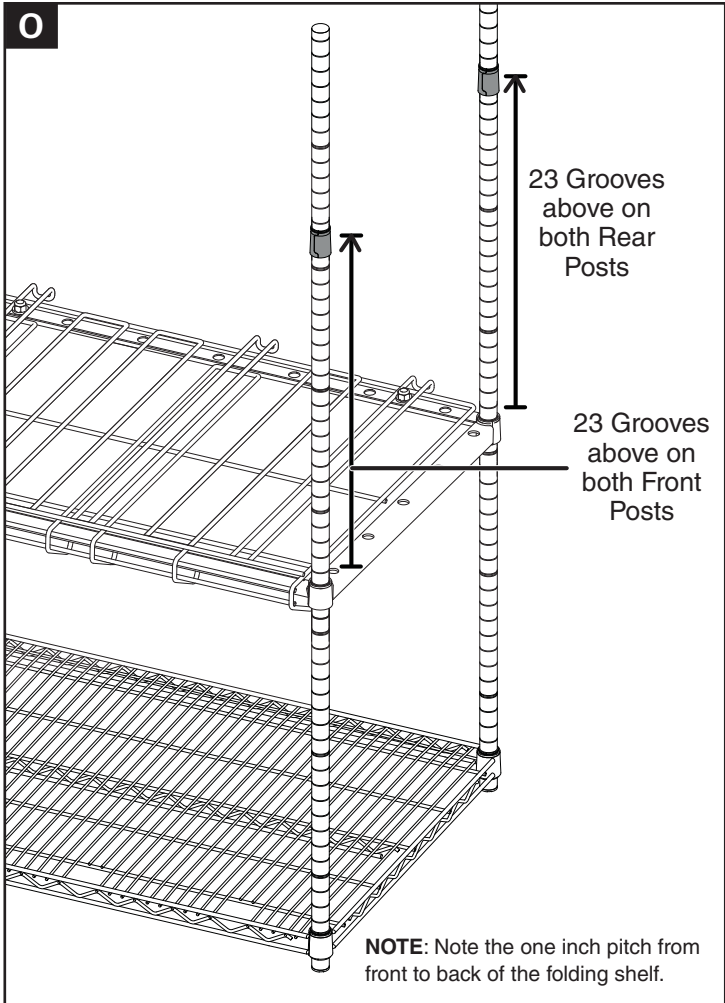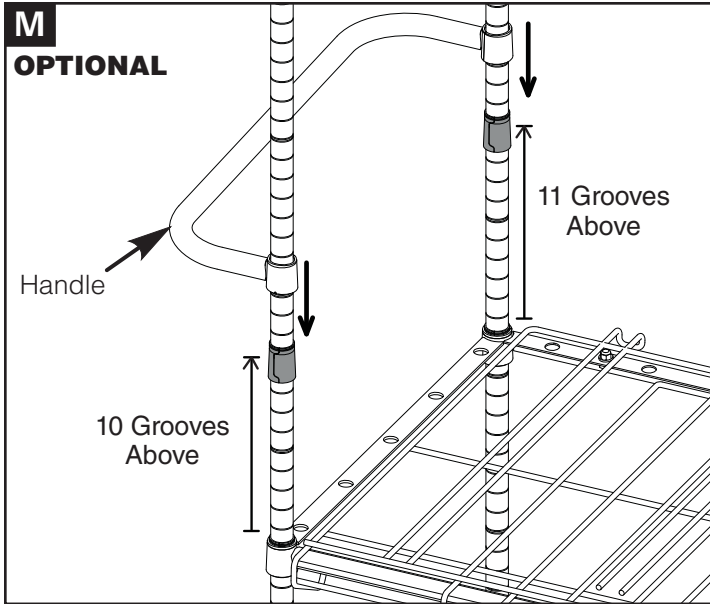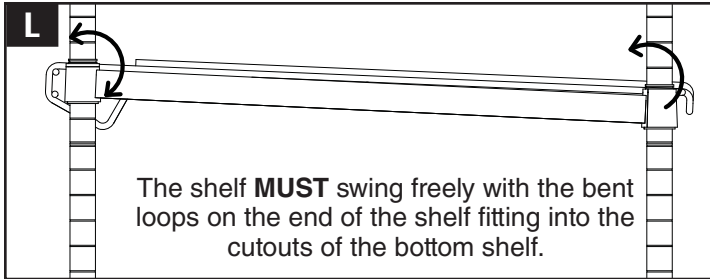

Convertible Linen Truck Standard Duty

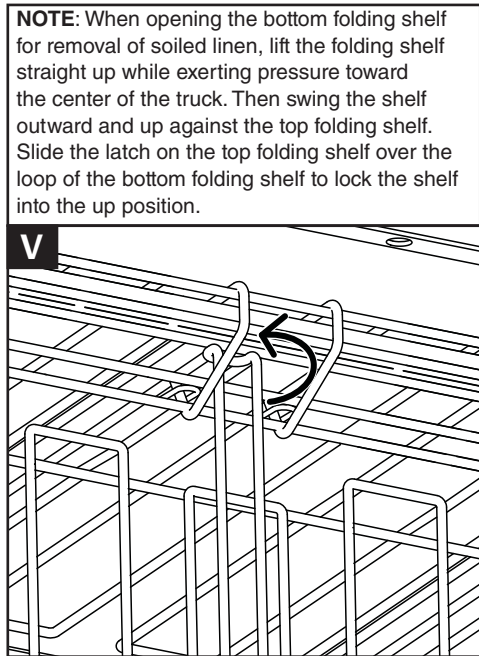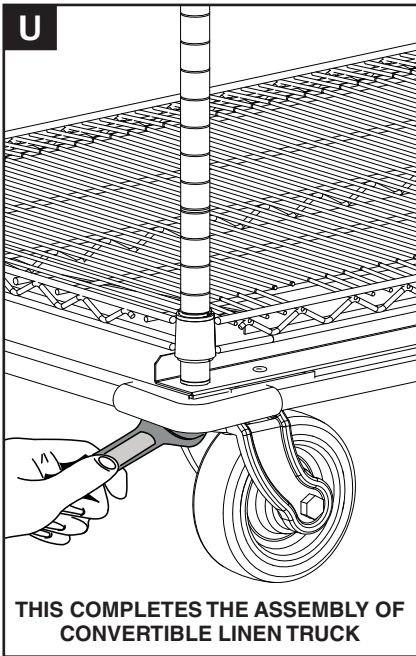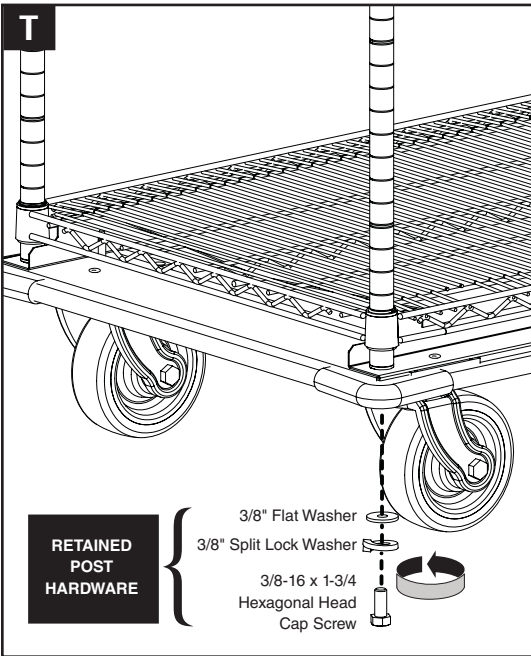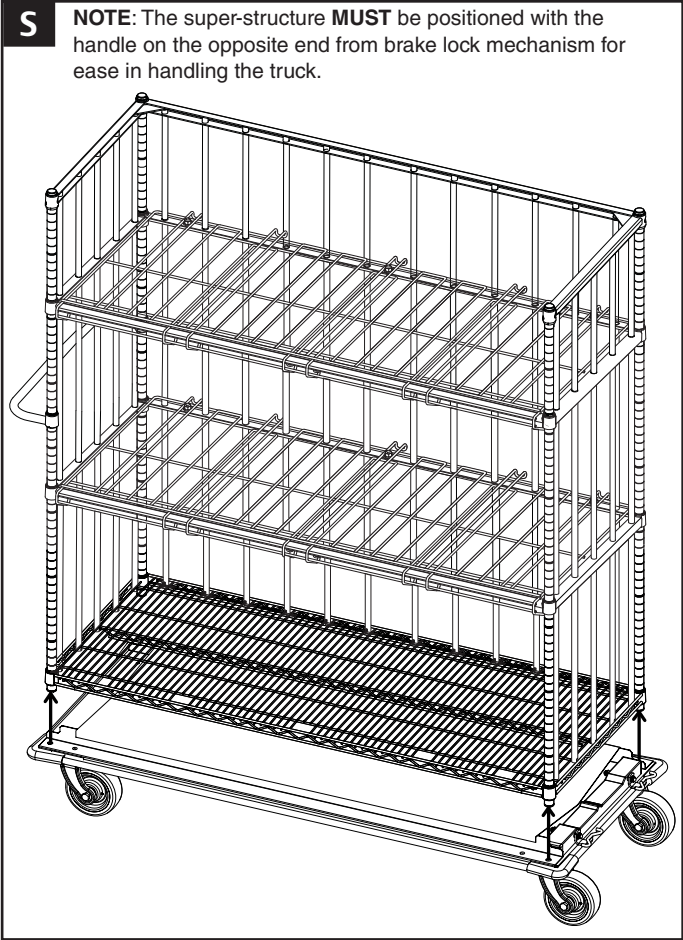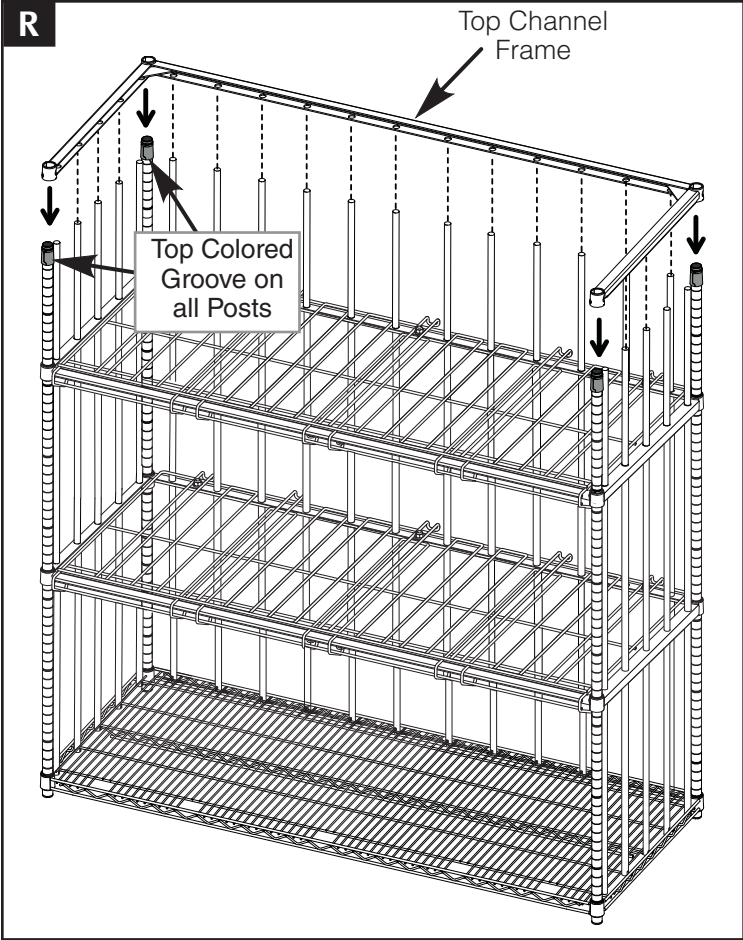

* Save this document for future application, load rating and/or safety reference.

US/Can: 1.800.992.1776
Corporate Headquarters (US): 1.570.825.2741
For Inquiries Outside of the U.S. and Canada, Visit www.metro.com/contactus

www.metro.com



L01-021 Rev.B 09/2016