


Stainless Steel & Phenolic Resin Top Worktables — {52.03}

- Corrosion-proof stainless steel construction throughout.
- Easy to clean smooth surfaces. Mobile units can be easily moved for cleaning.
- Available top materials include Type 304 stainless and TRESPA Phenolic resin (black or gray).
- Casters and accessories are available, but must be ordered separately.
- All tops are 30" (755mm) Wide.

Island-Top

Stainless Steel Worktables

Length (in.) (mm)	Width (in.) (mm)	Description	Stationary Cat No.	Mobile- Ready Cat No.
30 755	30 755	Worktable w/ Solid Shelf	LTS30IS	LTS30UIS
36 914	30 755	Worktable w/ Solid Shelf	LTS36IS	LTS36UIS
48 1219	30 755	Worktable w/ Solid Shelf	LTS48IS	LTS48UIS
60 1524	30 755	Worktable w/ Solid Shelf	LTS60IS	LTS60UIS
30 755	30 755	Worktable w/ 3-Sided Frame	LTS30UIS	LTS30UIS
36 914	30 755	Worktable w/ 3-Sided Frame	LTS36UIS	LTS36UIS
48 1219	30 755	Worktable w/ 3-Sided Frame	LTS48UIS	LTS48UIS
60 1524	30 755	Worktable w/ 3-Sided Frame	LTS60UIS	LTS60UIS

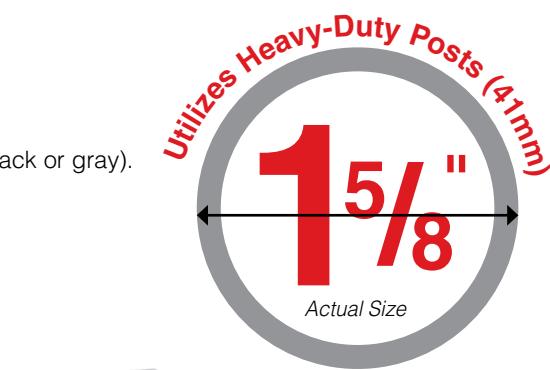

Mobile-Ready Worktables
DO NOT include casters.

Casters must be ordered separately.

LTS30IS with casters
(ordered separately)



Mobile-Ready Worktables
DO NOT include casters.

Casters must be ordered separately.

LTS30US with optional
accessory wire shelf



Mobile-Ready Worktables
DO NOT include casters.

Casters must be ordered separately.

LTS30PB with casters
(ordered separately)



Mobile-Ready Worktables
DO NOT include casters.

Casters must be ordered separately.

LTS30PG with casters
(ordered separately)

Stainless Steel Worktables

Length (in.) (mm)	Width (in.) (mm)	Description	Stationary Cat No.	Mobile- Ready Cat No.
30 755	30 755	Worktable w/ Solid Shelf	LTS30S	LTS30S
36 914	30 755	Worktable w/ Solid Shelf	LTS36S	LTS36S
48 1219	30 755	Worktable w/ Solid Shelf	LTS48S	LTS48S
60 1524	30 755	Worktable w/ Solid Shelf	LTS60S	LTS60S
30 755	30 755	Worktable w/ 3-Sided Frame	LTS30US	LTS30US
36 914	30 755	Worktable w/ 3-Sided Frame	LTS36US	LTS36US
48 1219	30 755	Worktable w/ 3-Sided Frame	LTS48US	LTS48US
60 1524	30 755	Worktable w/ 3-Sided Frame	LTS60US	LTS60US

Black

Phenolic Top Worktables

Length (in.) (mm)	Width (in.) (mm)	Description	Stationary Cat No.	Mobile- Ready Cat No.
30 755	30 755	Worktable w/ Solid Shelf	LTS30PB	LTS30UPB
36 914	30 755	Worktable w/ Solid Shelf	LTS36PB	LTS36UPB
48 1219	30 755	Worktable w/ Solid Shelf	LTS48PB	LTS48UPB
60 1524	30 755	Worktable w/ Solid Shelf	LTS60PB	LTS60UPB
30 755	30 755	Worktable w/ 3-Sided Frame	LTS30UPB	LTS30UPB
36 914	30 755	Worktable w/ 3-Sided Frame	LTS36UPB	LTS36UPB
48 1219	30 755	Worktable w/ 3-Sided Frame	LTS48UPB	LTS48UPB
60 1524	30 755	Worktable w/ 3-Sided Frame	LTS60UPB	LTS60UPB

Gray

Phenolic Top Worktables

Length (in.) (mm)	Width (in.) (mm)	Description	Stationary Cat No.	Mobile- Ready Cat No.
30 755	30 755	Worktable w/ Solid Shelf	LTS30PG	LTS30UPG
36 914	30 755	Worktable w/ Solid Shelf	LTS36PG	LTS36UPG
48 1219	30 755	Worktable w/ Solid Shelf	LTS48PG	LTS48UPG
60 1524	30 755	Worktable w/ Solid Shelf	LTS60PG	LTS60UPG
30 755	30 755	Worktable w/ 3-Sided Frame	LTS30UPG	LTS30UPG
36 914	30 755	Worktable w/ 3-Sided Frame	LTS36UPG	LTS36UPG
48 1219	30 755	Worktable w/ 3-Sided Frame	LTS48UPG	LTS48UPG
60 1524	30 755	Worktable w/ 3-Sided Frame	LTS60UPG	LTS60UPG

Leveling feet on stationary units have 1.250 (31mm) vertical adjustment.

*Casters ordered separately. Refer to Caster Selection Guide for more information.

Stainless Tables are load rated at 50 lbs. per sq. foot (.024kg per sq. cm) up to a maximum of 600 lbs. (273kg) assuming evenly distributed load and caster specification meets requirement.

Note: Mobile posts include an adaptor insert that will accept Metro 5" (127mm) stem casters.