




INSTALLATION INSTRUCTIONS

DRYING PEG


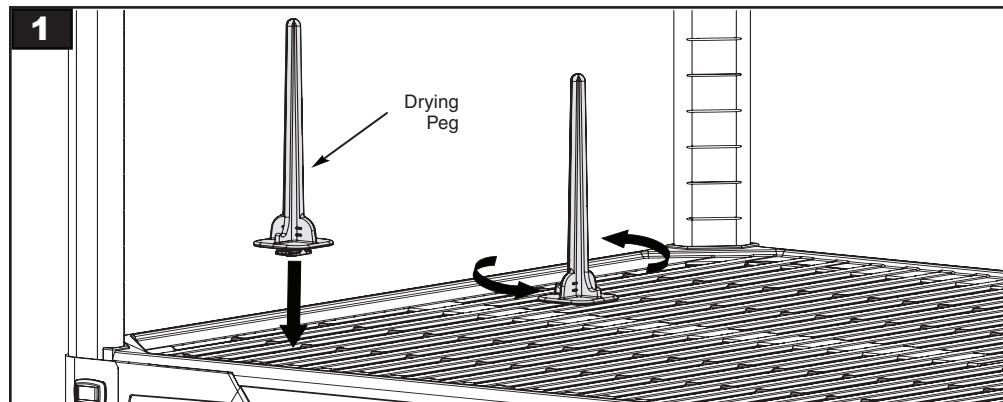


Note: Use two drying pegs per row for more abusive applications.

Tip: Works best if accessory grid, enclosure panel, accessory bar, or universal divider is positioned at the end of the unit.

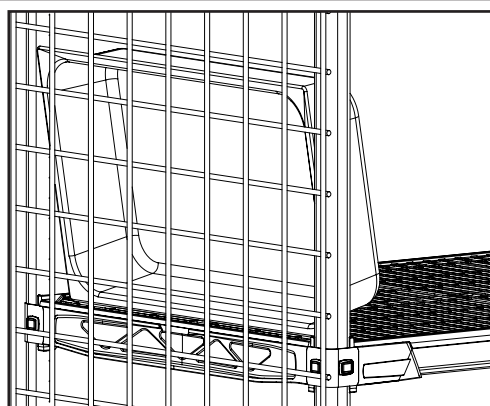
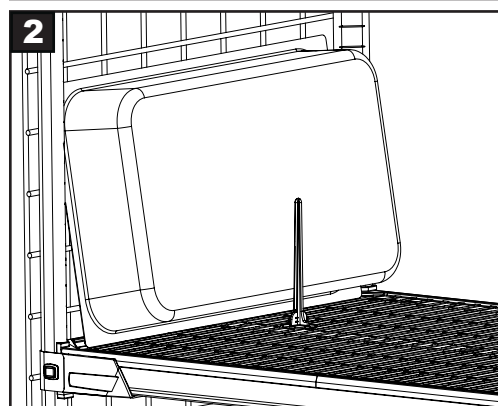


Note: Tilt the pans in the direction of the accessory grid.

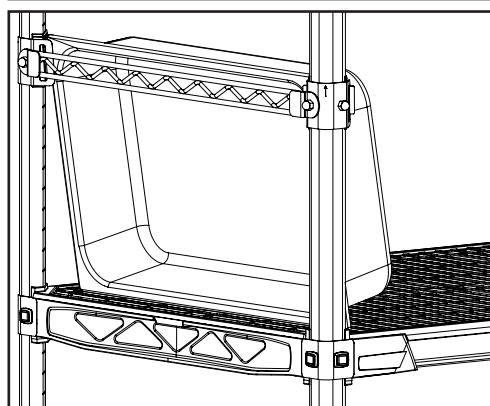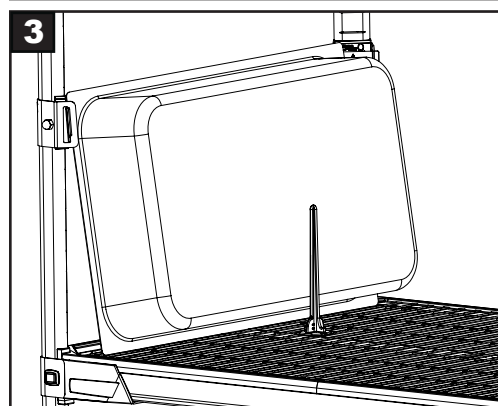

Note: Accessory Rail (XHR24S) is mounted to two add-a-collars that are installed 4 positions above the shelf.

Tilt the pans toward the accessory bar.

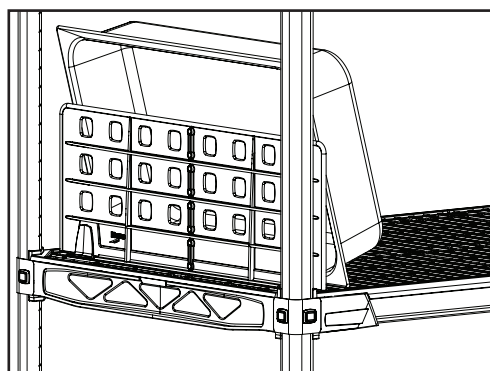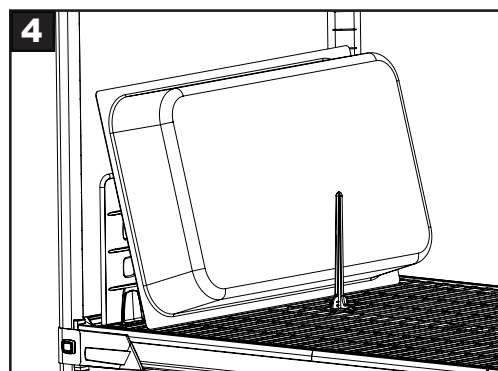


Note: Option for MetroMax I shelf (shown).

Tilt the pans toward the divider.


DRYING PEG

MetroMax i


4" (102mm) deep steam pans

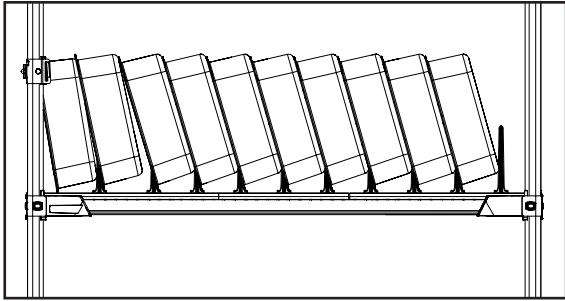

6" (152mm) deep steam pans

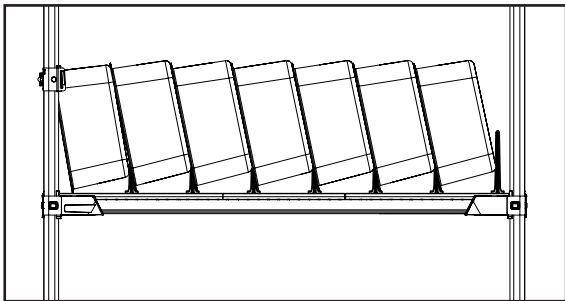


MetroMax i® - Drying Peg

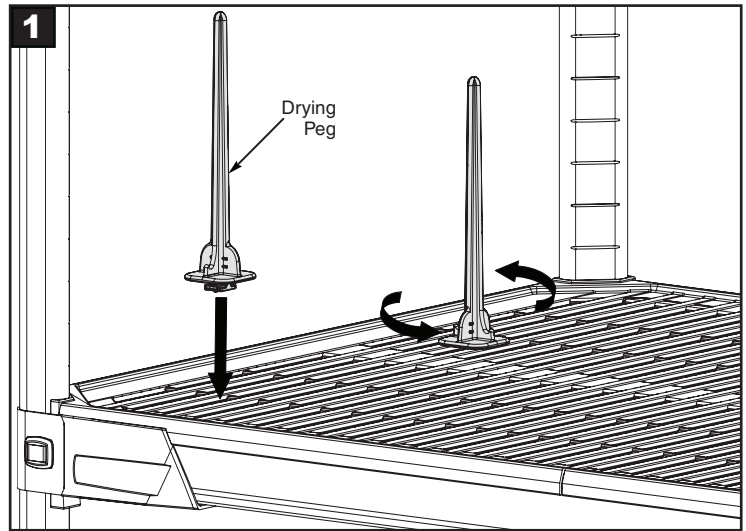


MetroMax 4


4" (102mm) deep steam pans

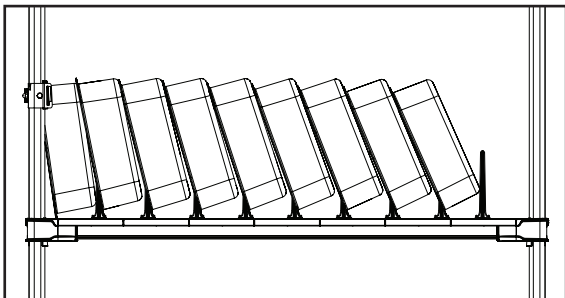

6" (152mm) deep steam pans

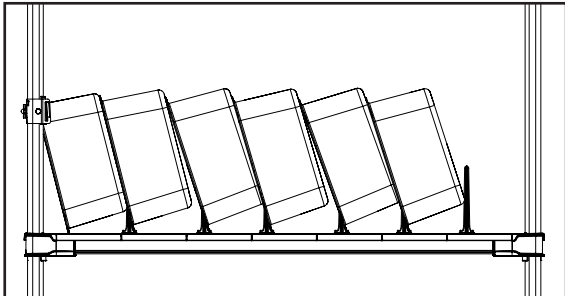

MetroMax 4® - Drying Peg

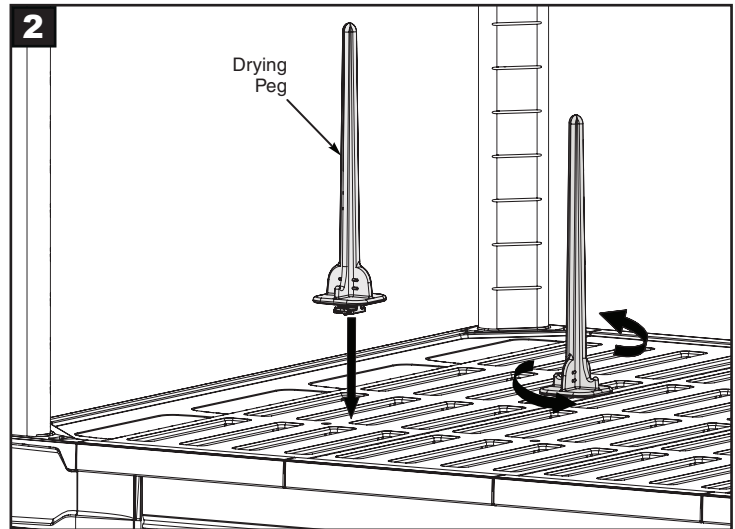

THIS COMPLETES INSTALLATION OF THE DRYING PEG

* Save this document for future application, load rating and/or safety reference.

US/Can: 1.800.992.1776
Corporate Headquarters (US): 1.570.825.2741
For Inquiries Outside of the U.S. and Canada, Visit www.metro.com/contactus

www.metro.com



INSTR-DRPEG
01/2019