



Item # _____

Job _____

METRO® MOBILE END LOAD “KNOCK DOWN” RACKS

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Rugged:** Tubular framework with aircraft-riveted slide assemblies.
- **Economical:** Shipped “knocked down” for reduced freight rate. Easily assembled with 12 bolts.
- **Sanitary:** Removable slide assemblies for easy cleaning.
- **Versatile:** Slide assemblies can be replaced with slides of other than standard spacing while retaining the same framework.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Stable:** 5" (127mm) diameter, NSF-listed casters, corner-mounted for maximum stability.
- **Lightweight:** Easy to handle.
- **Rapid Cooling**

NOTE: Available factory set-up. See price list.



RT183N

NSF



InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



End-Load “Knock-Down Racks”



13.70



END LOAD "KNOCK DOWN" RACKS

Specifications

- **Material:** Special design, natural finish, high strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction on slide assemblies, tensilok fasteners for frame assembly.
- **End Frames:** 1" square x .093" (25x2.4mm) wall extruded aluminum tubing.
- **Tie Bars:** Left to right and front to back tie bars of 1" (25mm) diameter aluminum bar stock, drilled and tapped at each end.
- **Slides, 3" & 5" (75 & 127mm) Spacing:** .060"x1 1/4"x1 1/2" (1.5x32x38mm) profile, bulb-tipped extruded angle-riveted to .060"x1"x1" (1.5x25x25mm) angle uprights.
- **Slides, 1 1/2" (38mm) Spacing:** .060"x1 1/2"x1 1/2" (1.5x12.7x38mm) bulb-tipped, extruded channel-riveted to .060"x1"x1" (1.5x25x25mm) angle uprights.
- **Casters:** Two HS5M on back — 5" (127mm) diameter ball bearing swivel stem casters with self-lubricating axle. Two HS5MB on front — same as above with wheel brake. NSF listed.
- **Load Rating:** 20 lbs. (9kg) per level. Not to exceed 300 lbs. (159kg) per unit.

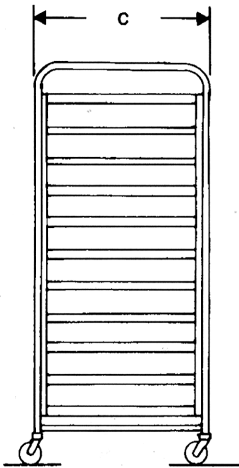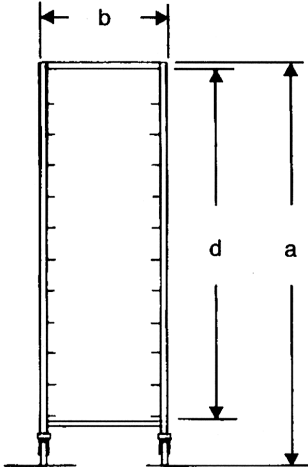

Dimensions

Cat. No.	(a) Height (in.)	(b) (c) Width/Depth (mm)	(d) Inside Height (in.)	(mm)	Slide Spacing (in.)		(mm)	Pan Capacity		Shipping Weight	
	No.	Size (in.)	(lbs.)		(kg)						
RT183N	64 ¹ / ₈ x20 ³ / ₈ x28	1630x520x710	55 ⁷ / ₈	1420	3	76 or 36	18 14x18	18x26	53	24	
RT115N	64 ¹ / ₈ x20 ³ / ₈ x28	1630x520x710	55 ⁷ / ₈	1420	5	127 or 22	11 14x18	18x26	50	23	
RT1334N	64 ¹ / ₈ x20 ³ / ₈ x28	1630x520x710	55 ⁷ / ₈	1420	1 ¹ / ₂	38	34	18x26	55	25	

Accessories

Model No.	Description
SU	Factory Set-Up
A38	Gray Rubber Corner Bumpers

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741
Fax: 570-825-2852

L02-081
Printed in U.S.A. Rev. 6/10
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2010 InterMetro Industries Corp.

For Product Information: U.S. and Canada: 1.800.992.1776 Latin America: 1.561.333.3824 Asia/Pacific: +65.6567.8003 Middle East/Africa: +971.4.811.8286 Europe: +31.76.587.7550