

MTM-90 Wireless Interlinking Transmitter

Key Features


- 16 auto-scannable UHF channels and numeric LED display
- High | Low power output selectable
- Modularized design allows easy installation, operation & trouble-free maintenance
- Fits MIPRO MA-708 & MA-808 wireless portable PA systems
- Ideal for parade routes, farmers markets, outdoor athletic event or religious services or any where you need to add more systems wirelessly without the mess of bulky speaker cables.

Accessories

MA-708	Portable Wireless PA System
MA-808	Portable Wireless PA System
MRM-70-R	Single-Channel Diversity Receiver Module
MT-90	Wireless Interlinking Transmitter Module

Technical Specifications

Frequency Range	480~934MHz
Oscillation Mode	PLL Synthesized
Bandwidth	24 MHz
RF Output Power	10 mW 100 mW (switchable)
Spurious Emissions	< -45 dBm
Dimensions	220(W)× 57(H)× 190(D)mm 8.6(W)× 2.2(H)× 7.5(D)"
Weight	Approx. 410 g 14.5 oz

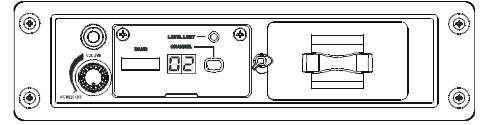

MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw



205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Specifications subject to change without notice. SS015/06