

KA-200 Counter SERIES 174 — Standard Type

- **KA-200** counter is high-performance unit that can be used as "standard counter" or "lathe counter".
- Downsizing and weight saving have been realized.
- The RS-232C interface enables connection to a PC or printer.

Optional Accessory

- Code out unit: **06AET993**




174-183
KA-212

SPECIFICATIONS

Order No.	174-183 □	174-185 □
Model	KA-212	KA-213
Number of axes to be displayed	2	3
Resolution	(Changeable according to the parameter) When AT100 is connected: 0.05 to 0.0001 mm When AT715 is connected: 0.01 to 0.001 mm	
Display/digit	Main display: 9 digits including sign Sub display: 8 digits	
Power supply voltage	AC 100 to 240 V, 50/60 Hz	
Dimensions	300 (W) x 70 (D) x 167 (H) mm	
Output (optional)	RS-232C	
Mass	1.25 kg	1.3 kg

□: To denote your AC power cable add the following suffixes to the order No. :
A for UL/CSA, D for CEE, DC for CCC, E for BS, K for KC, C and No suffix are required for PSE.

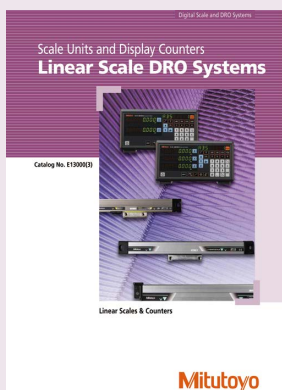

Refer to the Linear Scale DRO Systems Brochure (**E13000**) for more details.