

Setting Standards for Outside Micrometers SERIES 167

Typical application



Micrometer Inspection Gauge Block Set

Refer to page E-11 for details.



516-152/153/154



Micro Checker (holder only)
516-607


- Used for adjusting the reference point of outside micrometers.



167-108

SPECIFICATIONS and DIMENSIONS

167-101 to 167-103
167-141 to 167-143

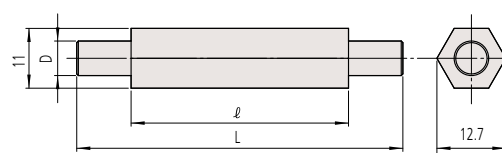


Unit: mm

Metric						
Order No.	Length <L> (mm)	Accuracy (μm)	Parallelism (μm)	Flatness (μm)	ℓ (mm)	Diameter <D> (mm)
167-101	25	±1.5	2.0	0.3	18	6.35
167-102	50	±2.0			40	
167-103	75	±2.5				

Inch						
Order No.	Length <L> (in)	Accuracy (in)	Parallelism (in)	Flatness (in)	ℓ (mm)	Diameter <D> (in)
167-141	1	±0.00005	0.00008	0.000012	18	0.25
167-142	2	±0.0001			40	
167-143	3	±0.0001				

167-104 to 167-107
167-144 to 167-147




Unit: mm

Metric					
Order No.	Length <L> (mm)	Accuracy (μm)	Parallelism (μm)	Flatness (μm)	Diameter <D> (mm)
167-104	100	±3	2.0	0.3	7.9
167-105	125	±3.5			
167-106	150	±4			
167-107	175	±4.5			

Inch					
Order No.	Length <L> (in)	Accuracy (in)	Parallelism (in)	Flatness (in)	Diameter <D> (in)
167-144	4	±0.0001	0.00008	0.000012	0.31
167-145	5	±0.00015			
167-146	6				
167-147	7				

167-108 to 167-119
167-148 to 167-159

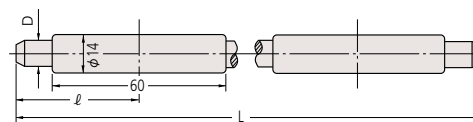

Unit: mm


Metric						
Order No.	Length <L> (mm)	Accuracy (μm)	Parallelism (μm)	Flatness (μm)	ℓ (mm)	Diameter <D> (mm)
167-108	200	±5.0	2.0	0.3	47	9.4
167-109	225	±5.5			47	
167-110	250	±6.0			52	
167-111	275	±6.5			57	
167-112	300	±7			64	
167-113	325	±7.5			69	
167-114	350	±8			74	
167-115	375	±8.5			80	
167-116	400	±9			85	
167-117	425	±9.5			90	
167-118	450	±10			95	
167-119	475	±10.5			101	

Inch						
Order No.	Length <L> (in)	Accuracy (in)	Parallelism (in)	Flatness (in)	ℓ (mm)	Diameter <D> (in)
167-148	8	±0.00015	0.00008	0.000012	47	0.37
167-149	9	±0.0002			47	
167-150	10	±0.0002			52	
167-151	11	±0.0002			57	
167-152	12	±0.00025			64	
167-153	13	±0.00025			69	
167-154	14	±0.00025			74	
167-155	15	±0.00025			80	
167-156	16	±0.00025			85	
167-157	17	±0.00025			90	
167-158	18	±0.00025			95	
167-159	19	±0.0003			101	

Micrometer

Setting Standards for Outside Micrometers
SERIES 167

167-120 to 167-404
167-160 to 167-180

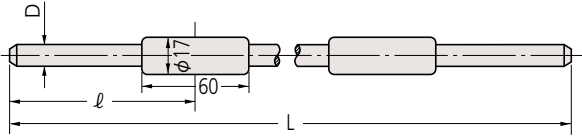

Unit: mm

Metric						
Order No.	Length <L> (mm)	Accuracy (μm)	Parallelism (μm)	Flatness (μm)	ℓ (mm)	Diameter <D> (mm)
167-120	500	±11	2.0	0.3	106	11.9
167-121	525	±11.5			112	
167-122	550	±12			117	
167-123	575	±12.5			122	
167-124	600	±13			128	
167-125	625	±13.5			133	
167-126	650	±14			138	
167-127	675	±14.5			142	
167-128	700	±15			147	
167-129	725	±15.5			153	
167-130	750	±16			158	
167-131	775	±16.5			164	
167-132	800	±17			170	
167-133	825	±17.5			175	
167-134	850	±18			180	
167-135	875	±18.5			185	
167-136	900	±19			191	
167-137	925	±19.5			196	
167-138	950	±20			201	
167-139	975	±20.5			207	
167-140	1000	±21			211	
167-365	1025	±21.5			217	
167-366	1050	±22			222	
167-367	1075	±22.5			227	
167-368	1100	±23			232	
167-369	1125	±23.5			238	
167-370	1150	±24			243	
167-371	1175	±24.5			248	
167-372	1200	±25			254	
167-373	1225	±25.5			259	
167-374	1250	±26			264	
167-375	1275	±26.5			269	
167-376	1300	±27			275	
167-377	1325	±27.5			280	
167-378	1350	±28			285	
167-379	1375	±28.5			291	
167-380	1400	±29			296	
167-381	1425	±29.5			301	
167-382	1450	±30			306	
167-383	1475	±30.5			312	
167-384	1500	±31			317	
167-385	1525	±31.5			322	
167-386	1550	±32			328	
167-387	1575	±32.5			333	
167-388	1600	±33			338	
167-389	1625	±33.5			343	
167-390	1650	±34			349	
167-391	1675	±34.5			354	
167-392	1700	±35			359	
167-393	1725	±35.5			364	
167-394	1750	±36			370	
167-395	1775	±36.5			375	
167-396	1800	±37			380	
167-397	1825	±37.5			386	
167-398	1850	±38			391	
167-399	1875	±38.5			396	
167-400	1900	±39			401	
167-401	1925	±39.5			407	
167-402	1950	±40			412	
167-403	1975	±40.5			417	
167-404	2000	±41			423	

Inch						
Order No.	Length <L> (in)	Accuracy (in)	Parallelism (in)	Flatness (in)	ℓ (mm)	Diameter <D> (in)
167-160	20	±0.0003	0.00008	0.000012	106	0.47
167-161	21	±0.0003			112	
167-162	22	±0.0003			117	
167-163	23	±0.0003			122	
167-164	24	±0.0003			128	
167-165	25	±0.00035			133	
167-166	26	±0.00035			138	
167-167	27	±0.00035			142	
167-168	28	±0.00035			147	
167-169	29	±0.00035			153	
167-170	30	±0.00035			158	
167-171	31	±0.00035			164	
167-172	32	±0.00035			170	
167-173	33	±0.00035			175	
167-174	34	±0.00035			180	
167-175	35	±0.00035			185	
167-176	36	±0.00035			191	
167-177	37	±0.0004			196	
167-178	38	±0.0004			201	
167-179	39	±0.0004			207	
167-180	40	±0.0004			211	

Note: Available up to 79 in