

# Track-It™ Pressure/Temp and Vacuum/Temp Data Loggers with Display

## Description

The *Track-It™* Pressure/Temperature and Vacuum/Temperature Data Loggers with Display are battery powered stand alone water tight compact data loggers that record up to 130,000 samples. They can be configured to record both pressure or vacuum and temperature or either parameter alone to maximize data storage space. Real time data, alarms and min/max information can be displayed on the multi-line LCD. The unit is easily configured using the free downloadable *Track-It™* Software. Simply connect the included USB cable to the logger and an open USB port on your PC and the *Track-It™* Software automatically identifies the logger. Configure the unit to start or stop recording immediately, at a predetermined time and date, or only when an alarm condition is sensed. The sample storage rate can be set from 1 sample every 2 seconds up to 1 sample every 24 hours. The on board data storage is non-volatile so data will not be lost in the event of a depleted battery. *Track-It™* Pressure/Temp and Vacuum/



Temp Data Loggers can be ordered in various ranges (see back for details). The logger is packaged in a rugged submersible anodized aluminum and stainless steel housing and has a standard 1/4" NPT fitting (1/2" NPT for 8700 and 14500 ranges). The replaceable internal lithium battery has up to a 3 year life.

## Features

- Display live and min/max readings
- Alarm set-points and indicators
- User definable engineering units
- USB interface (cable included!)
- Interactive software (free download!)
- Rugged IP67 package
- 1/4" NPT male connection (1/2" NPT male for 8700 and 14,500 ranges)
- 3 year battery life (battery included!)
- Temp range -4 to 185°F (-20 to 85°C)
- 3, 35, 150, 350, 550, 2000, 5800, 8700 and 14,500 PSI ranges
- 760 to 380 and 760 to 0 Torr
- 150% over range protection
- ASME Grade 3A Accuracy
- Accurate internal clock (1 minute/year)
- N.I.S.T. calibration available
- Rotate head AND display 359 degrees

## Typical Uses

- Industrial Process
- Food Manufacturing
- Water Supply Line
- Hydrant Water Pressure
- Household Water Pressure
- Building Supply
- Municipalities
- HVAC
- Oil and Gas
- Petro Chemical
- Compressors
- Pumps
- Hydrostatic Testing
- Water and Wastewater

# Track-It™ Pressure/Temp and Vacuum/Temp Data Loggers with Display

## Specifications

### General

<b>Record:</b>	<b>Sample Rates:</b> User configured 1 every 2 seconds to 1 every 24 hours <b>No. of Samples:</b> 130,000 (depends on setup)
<b>Display:</b>	Two line, 6 digit 7-segment LCD and 5 digit alpha numeric display with custom icons, multi-segment bargraph for 0-100% indication, backlight
<b>Record Trigger:</b>	Two independent triggers. Multiple trigger modes: Instantaneous, button control, on alarm, time and date (start and stop), day of week
<b>Record Mode:</b>	Fill to end of memory or cyclic, number of samples and time duration
<b>Alarms:</b>	2 user programmable alarms. High or Low
<b>Communication:</b>	Mini USB connection
<b>Software:</b>	Track-It™ Software —Program device, view data (historic or real time), export to spread sheet.
<b>Battery:</b>	Lithium 1/2AA 1.2Ah Life: Up to 3 years typical @ 1 minute sample rate
<b>Enclosure:</b>	Material: Anodized Aluminum and 316L Stainless Steel Dimensions: 2.94" dia x 1.82" deep x 4.78" tall (including port threads)

### Measurement

<b>Pressure Ranges:</b>	0-3, 0-35, 0-150, 0-350, 0-550, 0-2000, 0-5800, 0-8700, 0-14,500 psi
<b>Vacuum Ranges:</b>	760 to 380, 760 to 0, 760 to -760 torr
<b>Accuracy:</b>	± 0.25%
<b>Overpressure Rating:</b>	1.5 times max
<b>Port connection:</b>	1/4" NPT Male 1/2" NPT Male for 8700 and 14500 ranges
<b>Temperature Range:</b>	-20 to +85°C / -4 to 185°F
<b>Accuracy:</b>	±1°C 0 to 50°C / 32 to 122°F ±2°C -20 to 85°C / -4 to 185 F
<b>Resolution:</b>	0.1°C / 0.1°F

### Ordering Information

Track-It™ Pressure/Temp and Vacuum/Temp Loggers with display are available in the following ranges:

Range:	P/N: PSIA	P/N: PSIG	Range:	P/N: PSIA	P/N: PSIG	Range:	P/N:
0-3 PSI		5396-0380	0-5800 PSI	5396-0336	5396-0376*	0 to -380 torr	5396-0337
0-35 PSI	5396-0334	5396-0374	0-8700 PSI		5396-0377*	0 to -760 torr	5396-0338
0-150 PSI	5396-0331	5396-0371	0-14500 PSI		5396-0378*	760 to 0 torr	5396-0340*
0-350 PSI	5396-0332	5396-0372				760 to -760 torr	5396-0341
0-550 PSI	5396-0333	5396-0373					
0-2000 PSI	5396-0335	5396-0375*					


\*Sealed gauge sensors  
Logger w/ NIST Cal Cert P/N: 5396-03xx-CAL

### Track-It™ Software

Track-It™ Software is a powerful Windows based software package that allows for easy setup, retrieval, interpretation and export of recorded data. Simply connect your Track-It™ data logger to an open USB port and begin communicating immediately. Choose Absolute or Gauge readings, as well as your pressure scale from a list that includes kPA, MPA, Bar, milliBar, mmHG, inHg, Atm, PSI, pascal, inH2O and torr. Record the average, instantaneous, maximum, or minimum pressure during your sample interval.

Point and click to select your sample interval, alarm set points, engineering units, recording triggers. View a numerical data table or graphical representation of data readings relative to time. Use the graph tools such as zoom, cursor, min and max to examine and analyze the record. Track-It™ Software turns your PC into a real time data acquisition system by allowing you to stream graphical or tabular data directly to your PC. Export stored data into a spreadsheet in its entirety or partially using filters. Available for free download:

[http://monarchinstrument.com/Software/Track-It\\_Software.zip](http://monarchinstrument.com/Software/Track-It_Software.zip)

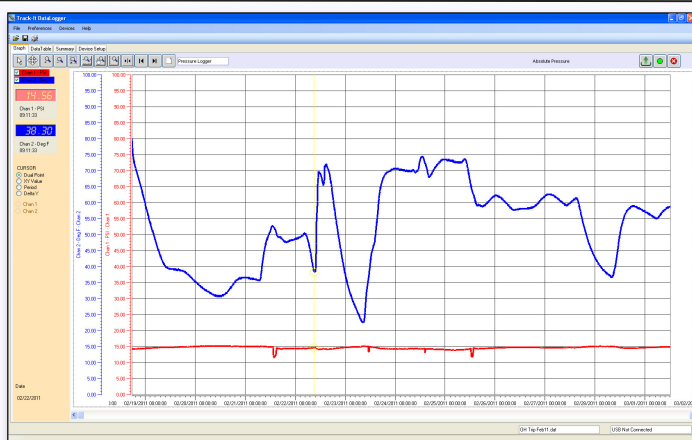

Track-It™ Software

### Track-It™ Transport App



Track-It™ Transport is a free Android Application that allows you to use your Android device to start and stop recording and transfer data using a USB On-the-Go cable. Available on Google Play:

<https://play.google.com/store/apps/details?id=com.trackit.transporter>