


NTF67D

Hand and Drill-Powered Flaring Tool

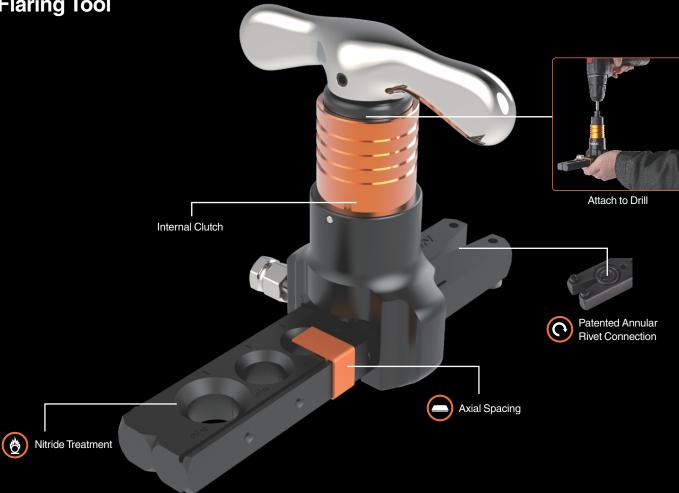

Accurate Flaring

Hand or Drill-Powered

• Efficient and labor-saving with drill attached

Patented Annular Rivet Connection





- Axial spacing for accurate and consistent flaring
- Eccentric cone with 45° flare

Internal Clutch

Preventing over-torquing

Nitride Treatment

- Longer service life
- Robust and durable

Eccentric Cone


• 45° flare for R410A system











Model Tube OD 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" Carry Case, NFG1 Flare Gauge

1-YEAR WARRANTY