


NEC 2x2 LCD TileMatrix Video Wall Solutions

MODEL	UN462A-TMX4P	UN462VA-TMX4P	UN492S-TMX4P	UN492VS-TMX4P	UN552S-TMX4P	UN552VS-TMX4P	UN552-TMX4P	UN552V-TMX4P
LCD MODULE								
Viewable Image Size	46"		49"		55"			
Panel Technology	SPVA		S-IPS		S-IPS (P-DID)			
Native Resolution	1920 x 1080							
Brightness (Typical/Max)	350/ 500 cd/m ²	500/ 700 cd/m ²	350/ 500 cd/m ²	500/ 700 cd/m ²	400/500 cd/m ²	500/ 700 cd/m ²		
Contrast Ratio (Typical)	3500:1		1300:1 (150,000:1 with Localized Dimming)		1200:1 (500,000:1 Dynamic)			
Net Weight (per display)	50.3lbs / 22.8kg	45.0lbs / 20.4kg	65.0 lbs / 29.5 kg		57.3lbs / 26.0kg			
Bezel gap (between displays)	5.7mm	3.5mm	3.5mm	3.5mm	1.8mm			

Input Panel

- 1 External Speaker out
- 2 Audio line out
- 3 USB1 (Sensor)
- 4 USB2
- 5 USB CM1 (2A)
- 6 USB CM2
- 7 LAN1 (Daisy Chain In)
- 8 LAN2 (Daisy Chain Out)
- 9 Video
- 10 Media Player USB
- 11 Media Player microSD
- 12 Remote (IR)
- 13 RS-232
- 14 HDMI1 (Daisy Chain In)
- 15 DVI-D
- 16 HDMI (Daisy Chain Out)
- 17 HDMI2 (CEC)
- 18 DisplayPort2
- 19 DisplayPort1 (Daisy Chain In)
- 20 DisplayPort Out (Daisy Chain Out)
- 21 VGA
- 22 Audio line in 1
- 23 Audio line in 2

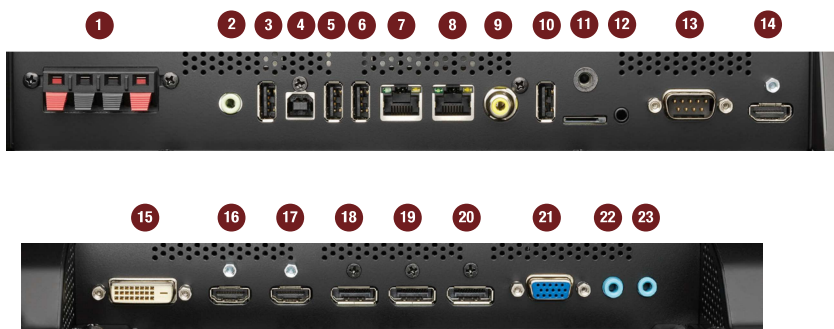

Peerless Pull-Out Mount* - Qty 4

- Peerless-AV full-service video mount DS-VW775 features customizable wall spacers for perfect placement and a pull-out/prop-open mechanism for quick service access.



DS-VW775


SurgeX Power Conditioning

- Protects equipment from power disturbances
- Superior technology to conventional single-stage MOV circuitry
- Completely non-sacrificial and never requires rest



NEC Accessories

Overframe Bezel Kit** creates a uniform and finished look



KT-LFD-CC2 - Qty. 1

- Display Wall Calibration Kit includes the calibration software on a USB drive and a color sensor, a version of the X-Rite MDSVSENSOR3

KT-RC3 - Qty. 1

- Remote Control and Human/Ambient Light Sensor Kit maximizes brightness efficiency and power usage for video wall products.

Included Cables

DisplayPort/HDMI Cables - Qty. 4

DisplayPort and HDMI cables used for daisy chaining video signal through the video wall. 2M included w/ 46" & 49" displays. 3M included w/ 55" displays. (included with in display box)

LAN Cables - Qty. 4

LAN cables for control daisy chain between consecutive displays (included with in display box)

Long LAN Cable - Qty 1

25ft cat5e snagless UTP patch cable* for control connection from source to the first monitor

USB Extender Cable

10ft USB 2.0 A male to B female extender cable

* Product warranty, if any, is provided directly by the manufacturer of the product. Warranty periods and warranty terms and conditions are as specified by each manufacturer in their applicable warranty statement. NEC does not provide any warranty on third party (non-NEC manufactured) products.

**Not available for UN552S and UN552VS




NEC 3x3 LCD TileMatrix Video Wall Solutions

MODEL	UN462A-TMX9P	UN462VA-TMX9P	UN492S-TMX9P	UN492VS-TMX9P	UN552S-TMX9P	UN552VS-TMX9P	UN552-TMX9P	UN552V-TMX9P
LCD MODULE								
Viewable Image Size	46"		55"			55"		
Panel Technology	SPVA		S-IPS			S-IPS (P-DID)		
Native Resolution	1920 x 1080							
Brightness (Typical/Max)	350/ 500 cd/m ²	500/ 700 cd/m ²	350/ 500 cd/m ²	500/ 700 cd/m ²	400/ 500 cd/m ²	500/ 700 cd/m ²		
Contrast Ratio (Typical)	3500:1		1300:1 (150,000:1 with Localized Dimming)			1200:1 (500,000:1 Dynamic)		
Net Weight (per display)	50.3 lbs. / 22.8kg	45.0lbs / 20.4kg	65.0 lbs / 29.5 kg			57.3lbs /26.0kg		
Bezel gap (between displays)	3.5mm	3.5mm	3.5mm	3.5mm	0.88mm	0.88mm	1.8mm	1.8mm

Input Panel

- 1 External Speaker out
- 2 Audio line out
- 3 USB1 (Sensor)
- 4 USB2
- 5 USB CM1 (2A)
- 6 USB CM2
- 7 LAN1 (Daisy Chain In)
- 8 LAN2 (Daisy Chain Out)
- 9 Video
- 10 Media Player USB
- 11 Media Player microSD
- 12 Remote (IR)
- 13 RS-232
- 14 HDMI1 (Daisy Chain In)
- 15 DVI-D
- 16 HDMI (Daisy Chain Out)
- 17 HDMI2 (CEC)
- 18 DisplayPort2
- 19 DisplayPort1 (Daisy Chain In)
- 20 DisplayPort Out (Daisy Chain Out)
- 21 VGA
- 22 Audio line in 1
- 23 Audio line in 2

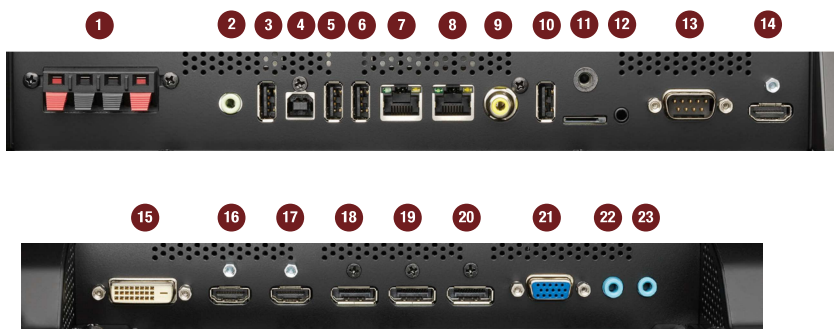

Peerless Pull-Out Mount* - Qty 9

- Peerless-AV full-service video mount DS-VW775 features customizable wall spacers for perfect placement and a pull-out/prop-open mechanism for quick service access.



DS-VW775


SurgeX Power Conditioning

- Protects equipment from power disturbances
- Superior technology to conventional single-stage MOV circuitry
- Completely non-sacrificial and never requires rest



NEC Accessories

Overframe Bezel Kit** creates a uniform and finished look



KT-LFD-CC2 - Qty. 1

- Display Wall Calibration Kit includes the calibration software on a USB drive and a color sensor, a version of the X-Rite MDSVSENSOR3

KT-RC3 - Qty. 1

- Remote Control and Human/Ambient Light Sensor Kit maximizes brightness efficiency and power usage for video wall products.

Included Cables

DisplayPort/HDMI Cables - Qty. 9

DisplayPort and HDMI cables used for daisy chaining video signal through the video wall. 2M included w/ 46" & 49" displays. 3M included w/ 55" displays. (included with in display box)

LAN Cables - Qty. 9

LAN cables for control daisy chain between consecutive displays (included with in display box)

Long LAN Cable - Qty 1

25ft cat5e snagless UTP patch cable* for control connection from source to the first monitor

USB Extender Cable

10ft USB 2.0 A male to B female extender cable

* Product warranty, if any, is provided directly by the manufacturer of the product. Warranty periods and warranty terms and conditions are as specified by each manufacturer in their applicable warranty statement.
NEC does not provide any warranty on third party (non-NEC manufactured) products.

**Not available for UN552S and UN552VS



NaViSet, TileComp and TileMatrix are trademarks of NEC Display Solutions.
All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice.
Errors and omissions are excepted. ©2020 NEC Display Solutions of America, Inc. All rights reserved.