

USER'S GUIDE

MIKROS™



Nordson
EFD

USA: 800.556.3484 or +1.401.431.7000
Europe: 0800 585733 or +44 (0) 1582 666334
Asia: +86 (21) 3866 9006
info@nordsonefd.com www.nordsonefd.com

Parts & Maintenance

Replacement Parts

Part #	Description
7018889	Loading tube, (50) per bag
7018902	Piston installation tool
7018893	Neoprene sleeve for grip
7018897	Dampening O-ring; Buna-N
7018899	Air seal O-ring; Buna-N (standard)
7018901	Air seal O-ring; Viton® (optional)


Note: O-rings are supplied (10) per bag.

Mikros Fluid Reservoir Tips

Polypropylene 0.25cc fluid reservoirs with either chamfered or blunt-end, burr-free, passivated stainless steel tips. Molded silicone-free with UV blocking agent. Packaged with tip protectors. (25) tips and pistons per box.

Part #	Description
7018881	Chamfered, 30 gauge, 0.2 mm ID (.006"), lavender
7018887	Chamfered, 33 gauge, 0.1 mm ID (.004"), grey
7018884	Blunt-end, 32 gauge, 0.1 mm ID (.004"), yellow

To Service O-ring Seals

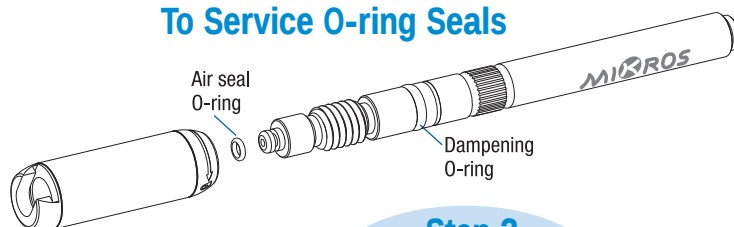

Step 1.

Rotate grip toward "unlock" and remove it from the pen body.

Step 2.

Replace O-ring with new lubricated O-rings.

Step 3.

Reinstall the grip on the pen body.

Nordson
EFD


For Nordson EFD sales and service in over 30 countries, contact EFD or go to www.nordsonefd.com

USA: 800.556.3484 or +1.401.431.7000
Europe: 0800 585733 or +44 (0) 1582 666334
Asia: +86 (21) 3866 9006
info@nordsonefd.com www.nordsonefd.com


Viton is a registered trademark of DuPont.
©2011 Nordson Corporation 7018878 v091911

Loading

CAUTION: Fill reservoir no higher than maximum fill level shown.

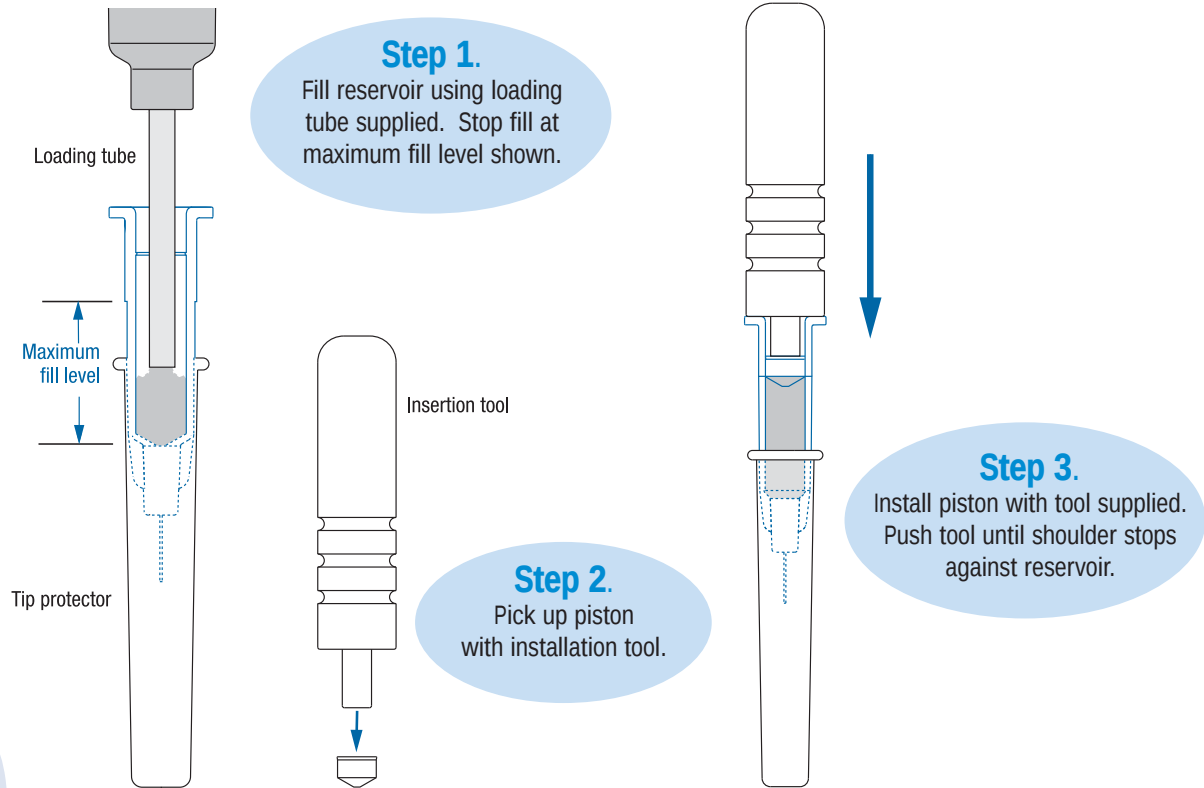

Setup

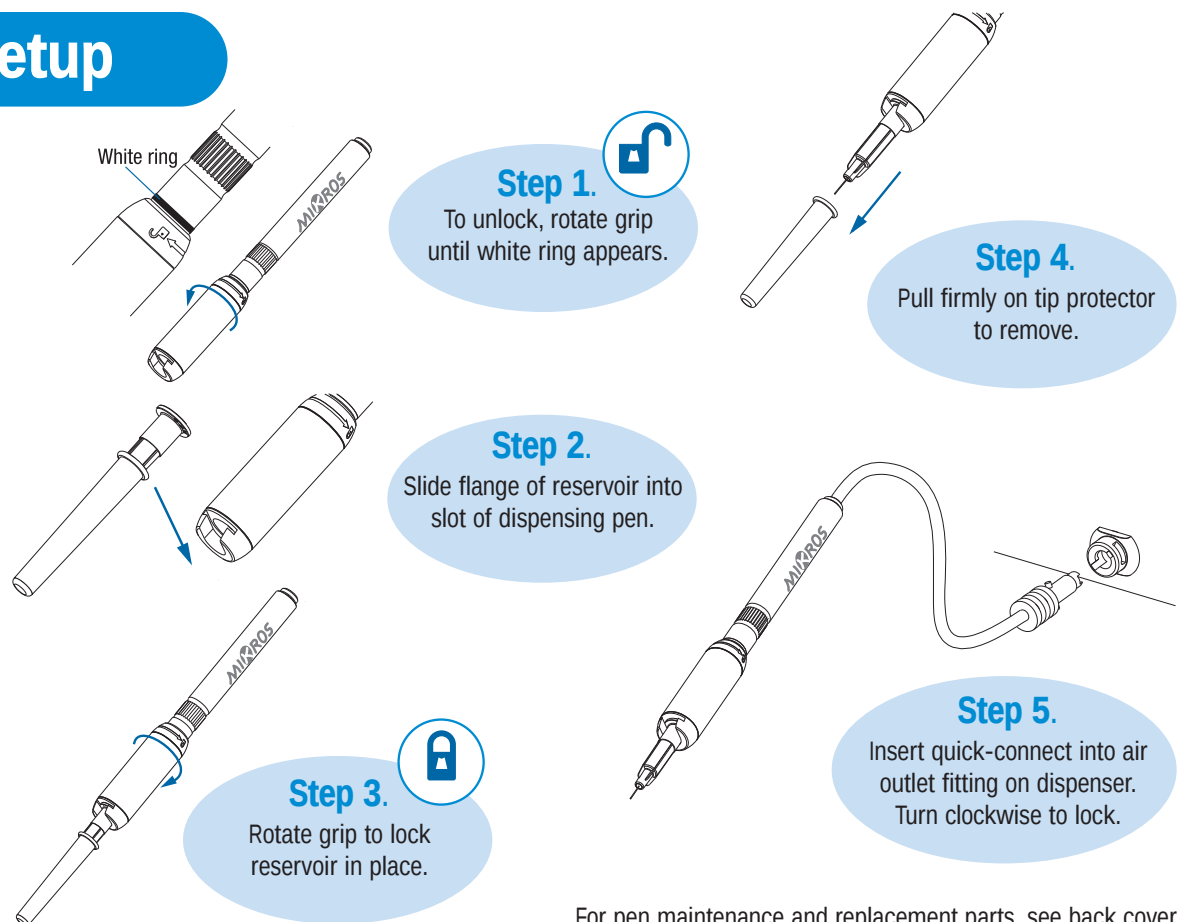

For pen maintenance and replacement parts, see back cover.