



THE INNOVATOR OF SELF-AMPLIFIED AUDIO PRODUCTS

Productivity

Compliance

Simplicity

Results

Savings

Solutions



OWI-INC.COM
amplified-speakers



SELF-AMPLIFIED, SURFACE-MOUNTED SPEAKERS



AMP6022 (High Voltage Combo) (115 V)

- Self-Amplified Speaker with a 115 Volt Power Supply and a Non-Amplified Speaker P602
- 6.5" Woofer, .79" Tweeter
- 15 Watts x 2 = 30 Watts Power

AMP602 (High Voltage Speaker Also Available Separately)



One OWI Amplified Speaker Powers 1 Passive Speaker



AMPLV6022 (Low Voltage Combo) (15 VDC Power Supply)

- Self-Amplified Speaker with a Low Voltage 15 VDC, Level V Power Supply and a Non-Amplified Speaker P602
- 6.5" Woofer, .79" Tweeter
- 15 Watts x 2 = 30 Watts Power

AMPLV602 (Low Voltage Speaker Also Available Separately)



One OWI Amplified Speaker Powers 1 Passive Speaker



AMP-BT-602-1-W

AMP-BT-602-1-B

NEW

(((WITH BLUETOOTH®)))

AMP-BT-602-1 (15 VDC Power Supply)

- 2-Way, 6.5" Woofer, 4 Ohm, Low Voltage Speaker, Available in Combinations
- 15 VDC, Level V Power Supply and Mounting Bracket
- 6.5" Woofer, .79" Tweeter
- 15 Watts x 2 = 30 Watts Power

P602 (Low Voltage Speakers Available Separately)



One OWI Amplified Speaker (AMP-BT602-1) Can Power 1 (P602) or Up To 3 Passive Speakers (P602)

* "The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by [licensee name] is under license. Other trademarks and trade names are those of their respective owners."

15 V DC POWER SUPPLY

UL Listed Efficiency Level V (Energy Star)

PS15VDC35AL5

- Power Supply included with all OWI Amplified Speakers



LINE LEVEL, STEREO/ MONO VOLUME CONTROL


AMPSTVCW

Accessory for All OWI Self-Amplified Speakers

- 3 Inputs Allowing Two Stereo Pairs (4 in, 1 out)
- 3 Stereo Inputs and 1 Balanced Mono Input
- 3.5 Mini Stereo Input on the Faceplate
- Fits in a Single Gang Box.



SELF-AMPLIFIED, IN-CEILING SPEAKERS

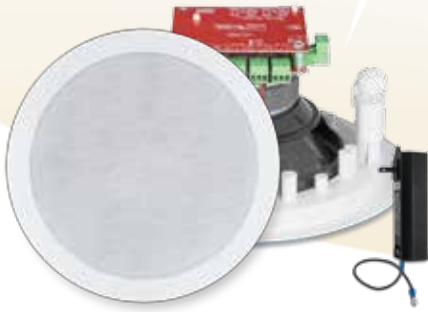

AMP-R2SIC5 / AMP-R2SIC6

- 2 Source, Self-Amplified Drop Ceiling Speaker
- 5.25" or 6.5" Woofer Size
- 2 x 20 or Total 40 Watts Maximum Power
- 1, 2 and 4 Speaker Packages Available



One OWI Amplified Speaker Can Power 1 Or Up To 3 Passive Speakers



AMP-HD2SIC5 / AMP-HD2SIC6

- Integrable Amplified In-Ceiling Speaker
- With Electronic Shunt that Conforms with NFPA72 Regulations
- With RJ45 Input
- Modular Upgrades




One OWI Amplified Speaker Can Power 1 Or Up To 3 Passive Speakers

Self-Amplified Ceiling Speaker on a 2 x 2 Metal Tile with Metal Backcan

- 1, 2 and 4 Speaker Packages Available

One OWI Amplified Speaker Can Power 1 Or Up To 3 Passive Speakers

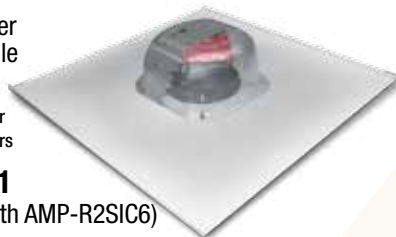

2X2AMP-R2S61

(2 x 2 Metal Tile with AMP-R2SIC6)

2X2AMP-BT2S61

(2 x 2 Metal Tile with AMP-BTR2SIC6)

2X2-ER2TR61

(2 x 2 Metal Tile with AMP-ER2TR6)

2X2AMP-HD2S61

(2 x 2 Metal Tile with AMP-HD2SIC6)

2X2AMPGRN1S61

(2 x 2 Metal Tile with AMP1SGRN)



AMP-BT2SIC5 / AMP-BT2SIC6

- Two Audio Inputs. Priority Override
- 15 VDC Level Power Supply
- Can Drive 3 Additional Non-Powered Speakers (IC5 or IC6)



One OWI Amplified Speaker Can Power 1 Or Up To 3 Passive Speakers



((WITH BLUETOOTH®))

AMP-ER2TR6

- Multi Voice Coil Amplified Emergency Series Speaker
- With ER Paging Override
- Stereo Ready
- Available in 6", 10 W or 25 W Models



One OWI Amplified Speaker Can Power 1 Or Up To 3 Passive Speakers



NEW

Self-Amplified Ceiling Speaker on a 2X2 Full Grill with Metal Backcan

2X2FG-R2S61

(Full Grill with AMP-R2SIC6)

2X2FG-BT2S61

(Full Grill with AMP-BT2SIC6)

2X2FG-ER2TR61


(Full Grill with AMP-ER2TR6)

2X2FG-HD2S61

(Full Grill with AMP-HD2SIC6)

2X2FGGRN1S61

(Full Grill with AMP1SGRN)

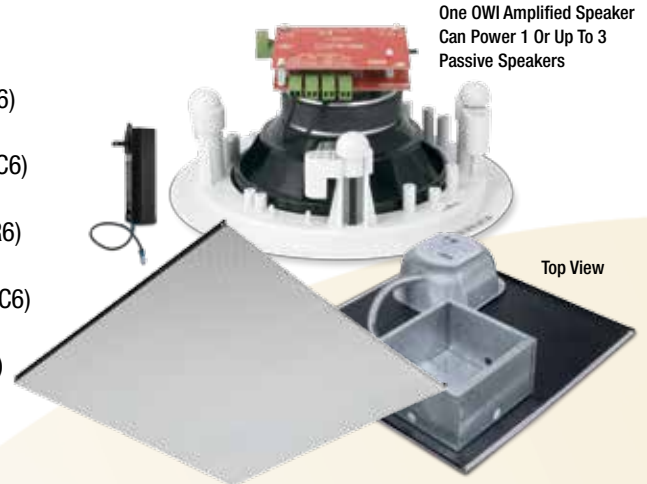

One OWI Amplified Speaker Can Power 1 Or Up To 3 Passive Speakers

Top View

AMP1SGRN

- Self-Amplified "GREEN" Speaker
- 3 Audio Inputs
- 2 x 16 or Total 32 Watts Maximum Power
- 1, 2 and 4 Speaker Packages Available



One OWI Amplified Speaker Can Power 1 Or Up To 3 Passive Speakers



AMPLIFIED TRUMPET SPEAKER

SELF-AMPLIFIED FOR MUSIC AND PAGING



AMP04TRP

- Self-Amplified for Music and Paging
- Up to 40 Watts of Power
- Up to 10 Amplifiers on One Line
- 60 Foot Throw
- Ceiling, Pole and Wall Mountable
- Unique "C" Mounting Bracket
- Power Supply Included



One OWI Amplified Speaker Can Power 1 Or Up To 3 Passive Speakers



15V DC Power Supply with Grounding Wire



AMPBACKPLATE

AMPLIFIERS

PERFECT FOR • CLASSROOMS • SMALL MEETING ROOMS OR LECTURE HALLS • RESTAURANTS AND BARS



IR Remote Control

70V, 40W DIGITAL MINI AMPLIFIER

AMPMA70V40

- 70 V, 40 W, Power Amplifier (Class D) with Output Alternately at 70 V or 100 V. Digital and RCA Inputs.
- One Digital Audio Input (Optical)
- Mono Audio Output at 40 W
- Two Stereo Inputs
- 16 ID Code Control
- 3-Level MIC input
- Switchable Stereo to Digital
- Volume/Base/Treble Controls
- For OWI Surface and Ceiling Speakers.

8Ω, 40W AMPLIFIER FOR SURFACE AND CEILING SPEAKERS

AMP1SGB

- Pre-Set Amplification Settings
- Comes in a UL Rated, Double Gang Box
- Completely Hidden from View
- Can Drive up to Four Surface Mounted or In-Ceiling Speakers
- Up to 40 Watts of Power
- Power Supply Included



15V DC Power Supply with Grounding Wire



One OWI AMP1SGB Amplifier Can Power One Or Up To FOUR OWI Speakers

8Ω, 40W DIGITAL MINI AMPLIFIER


AMPMA40X

- Amplifier and Remote Control/Sensor
- Small but Powerful (Class D Amplifier) with 3 Inputs (2 Line-In and 1 Balanced MIC)
- Integrated with EQ Control, MIC Mixer Function, Bridge Connection and IR Remote Control
- For OWI Surface and Ceiling Speakers



Connections for MIC/DVD/PC and Speakers

IR Remote Control

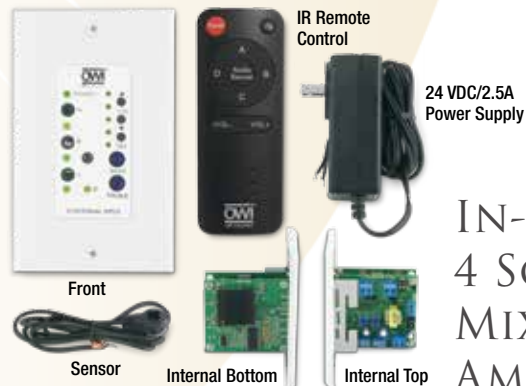

Front

Sensor

Internal Bottom

Internal Top

IR Remote Control

24 VDC/2.5A Power Supply

IN-WALL 4 SOURCE MIXER/AMPLIFIER

AMP-IW4S

- Digital Mixer Amplifier that Installs into a Standard 1-Gang Electrical Box. A Stand Alone Audio Only Communication System.
- Perfect for Multi-Media Environments and Emergency Communication
- IR Remote Control Included. Power Supply Included - 24 VDC/2.5 A



17141 Kingsview Ave. Carson CA 90746 USA | ph.: 310.515.1900 | toll free: 800.638.1694
 fax: 310.515.1606 | web: www.owi-inc.com | email: info@owi-inc.com

102416

www.owi-inc.com