

3D HOME THEATER PROJECTOR HD25e



TRUE CINEMATIC EXPERIENCE



Create the ultimate Home Theater experience with unsurpassed image quality and color fidelity



Native 1080p resolution for the sharpest, most visually stunning image quality



Full 3D compatibility; immerse yourself in your favorite 3D movie or video game



Comprehensive connectivity to satisfy your current and future needs



Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

The Optoma HD25e delivers stunning high-definition 1080p video with unsurpassed color accuracy and incredibly sharp detail. It's the ideal projector for today's big-screen home theater experience.

It offers full 3D compatibility for seamless integration with your favorite 3D Blu-ray player, Xbox, PS3 and other gaming consoles. Designed for maximum performance and reliability, the Optoma HD25e features industry-leading energy saving features and whisper quiet operation to help recreate a true cinematic experience in the comfort of your own home.

CONNECTIVITY (May require optional accessories)



COMPUTERS



SMART PHONES



TABLETS



3D BLU-RAY/DVD PLAYERS



SET TOP BOXES



CAMCORDERS



GAME CONSOLES



DIGITAL CAMERAS



Roku®



Apple TV®

3D HOME THEATER PROJECTOR — HD25e

OPTICAL/TECHNICAL SPECIFICATIONS


Display Technology	Single 0.65" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	HD 1920 x 1080
Maximum Resolution	WUXGA 1920 x 1200
Brightness	2800 ANSI lumens
Contrast Ratio	20,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	6000/3500 Hours (ECO+/normal) 190W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	>80%
Offset	116%
Aspect Ratio	16:9 Native, 4:3 compatible
Throw Ratio	1.5–1.8 (distance/width)
Projection Distance	3.9'–32.8' (1.5–10 m)
Image Size	37.6"–301.1" (0.7–7.62 m)
Projection Lens	F=2.55–2.86, f=22.37–26.73 mm, 1.2x manual zoom and focus
Digital Zoom	0.8 ~ 2.0
Audio	10-Watt speaker
Noise Level	26dB
Remote Control	Backlit IR remote control
Operating Temperature	41–113°F (5–45°C), 85% max humidity
Power Supply	AC Input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 262W (Normal), Min 191W (Eco), <0.5W (standby-ECO)

COMPATIBILITY SPECIFICATIONS

Computer Compatibility	WUXGA, UXGA, SXGA+, WXGA+, WXGA, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
Video Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility**	Supports all HDMI 1.4a mandatory 3D format, side-by-side format and top and bottom format. 3D glasses are needed and sold separately. (See user manual for details)
Vertical Scan Rate	24–85Hz, 120Hz, 144Hz
Horizontal Scan Rate	15.375–91.146KHz
User Controls	Complete on-screen menu, adjustments in 27 languages
I/O Connection Ports	Two HDMI v1.4a, VGA-in, 3D VESA, composite video, two audio-in, audio-out, RS-232C, USB-B
Loop Through (Audio, VGA)	<i>Audio:</i> VAO audio out, HDMI VAO audio out supported (VAO in normal mode, fixed in Standby)

PHYSICAL SPECIFICATIONS

Security	Kensington® lock, security bar and keypad lock
Weight	6.4 lb (3.1 kg)
Dimensions	12.7" x 3.8" x 9.2"

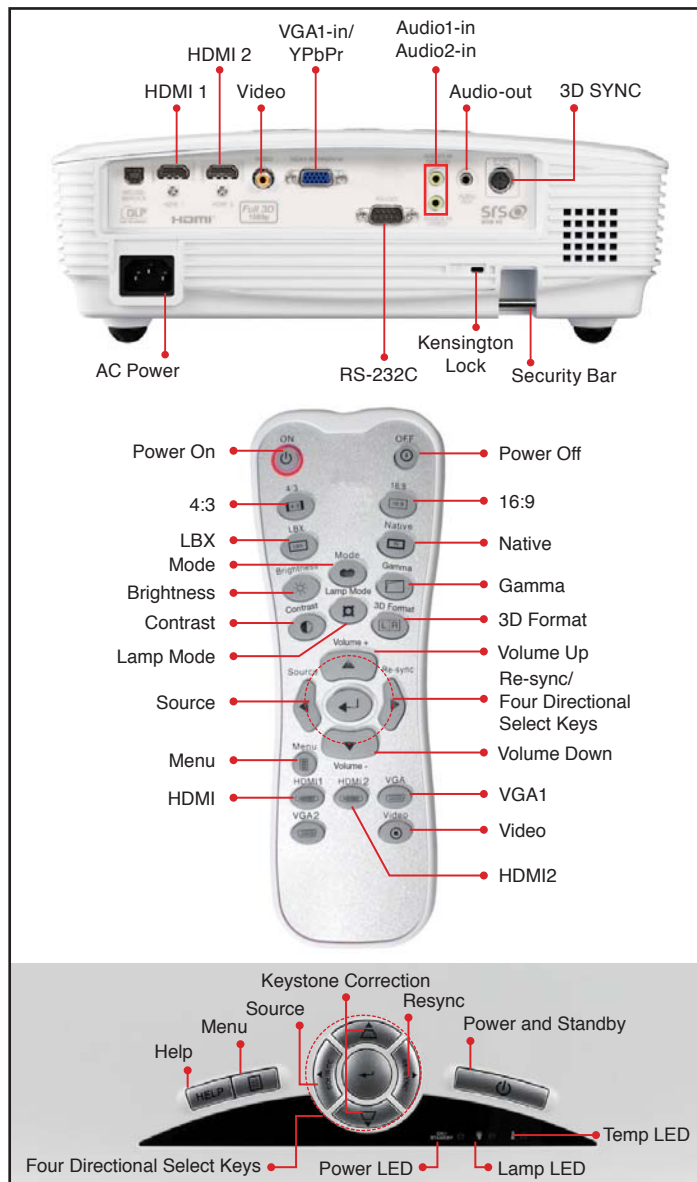

Warranty

1-Year Limited Parts and Labor, 90-Days on Lamp

In the Box (Standard Accessories)

AC power cord, remote control, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

HDMI cable, ceiling mount, component to VGA cable, composite video cable, RS-232 cable, Optoma screen, DLP® Link™ 3D glasses, RF 3D glasses, RF 3D emitter, Lens cap

Accessory Part Numbers

Lamp: BL-FU190E	Remote: BR-3067B
Power Cord (11M): BC-PUPIXY11	Mount: BM-5001U
VGA to component adaptor: BC-VGCRXY00	RF 3D emitter: BG-BC100B
DLP® Link™ 3D glasses: BG-ZD301	RF 3D Glasses: BG-ZF2100GLS
Lens cap: 75.8EG02G001	

UPC 796435 81 203 4

www.OptomaUSA.com

Optoma
Projector Expert

*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

**3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of the RF 3D emitter. Please visit www.OptomaUSA.com for more information

Copyright © 2013 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time.