

MULTIMEDIA PROJECTORS

TX635-3D / TW635-3D



205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

PRESENTATION-READY PERFECTION



- Share everything, from lessons to presentations, and deliver superior text and images — 3500 ANSI lumens bright and 10,000:1 contrast ratio
- Easily display closed-caption content with the built-in decoder
- Streamline administration with network control and management via RS-232 or RJ45 ports
- Create a rich, engaging and vivid viewing experience with 3D capabilities



Optoma's TX/TW635-3D projectors bring together the features and functionality users need to create compelling and powerful presentations. These 3D-PC ready projectors deliver an impressive 3500 ANSI lumens brightness and 10,000:1 contrast ratio. Broad input/output options, which include HDMI, VGA, USB and more, deliver ultimate flexibility for users, while RJ45 and RS-232 ports support control and management of the projectors from a remote location.

CONNECTIVITY (May require optional accessories)



COMPUTERS



SMART PHONES



TABLETS



BLU-RAY/DVD PLAYERS



SET TOP BOXES



CAMCORDERS



GAME CONSOLES



DIGITAL CAMERAS

MULTIMEDIA PROJECTORS — TX635-3D, TW635-3D

OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	TX– Single 0.55" DC3 DMD DLP TW– Single 0.65" DC3 DMD DLP
Native Resolution	TX– XGA (1024 x 768) TW– WXGA (1280 x 800)
Brightness	3500 ANSI lumens
Contrast Ratio	10,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	6000/5000/3000 hours (Eco+/Eco/Normal) 240W
Projection Method	Front, rear, upright, inverted
Keystone	+/- 40 Vertical Auto Keystone
Uniformity	> 85%
Aspect Ratio:	TX– 4:3 Native; 16:9 and 16:10 compatible TW– 16:10 Native; 4:3 and 16:9 compatible
Throw Ratio	TX– 1.6 - 1.92 TW– 1.28 - 1.536
Projection Distance	3.92' to 32.8'
Image Size (Diagonal)	TX– 30" to 307" TW– 36.3" to 362"
Projection Lens	F= 2.4 to 2.66, f=18.2 to 21.8mm, 1.2X manual focus
Offset	TX–115% TW– 112%
Audio	10-Watt speaker
Noise Level	28dB/30dB
Remote Control	IR remote mouse with laser
Operating Temperature	41° to 113°F (5° to 45°C)
Power Supply	AC input 100-240V, 50-60Hz, auto-switching
Power Consumption	328W Max (normal), 247W (eco), <0.5W (standby)

COMPATIBILITY SPECIFICATIONS


Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA, PC and Macintosh compatible
Video Input Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility**	720p, XGA, SVGA 120Hz frame sequential
Closed Captioning	Supported
Vertical Scan Rate	24 to 85 Hz, 120Hz
Horizontal Scan Rate	15.3 to 91.1 KHz
User Controls	Complete on-screen menu
I/O Connection Ports	HDMI 1.3, two VGA-in, VGA-out, composite video, two Audio-in, Audio-out, Mic-in, RS- 232, USB Type B for mouse, USB Type A for wireless or thumb drive, RJ45, mini-USB Type B for display
Loop Through (Audio, VGA)	Monitor: D-Sub 15-pin VGA output Audio stereo mini-jack output (functional in both normal and standby modes)

PHYSICAL SPECIFICATIONS

Security	Kensington® lock port, security bar and keypad lock
Weight	4.4 lbs
Dimensions (W x D x H)	11.3" x 3.0" x 8.6"

*Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

**3D source, 3D content & 3D glasses are required for 3D viewing.

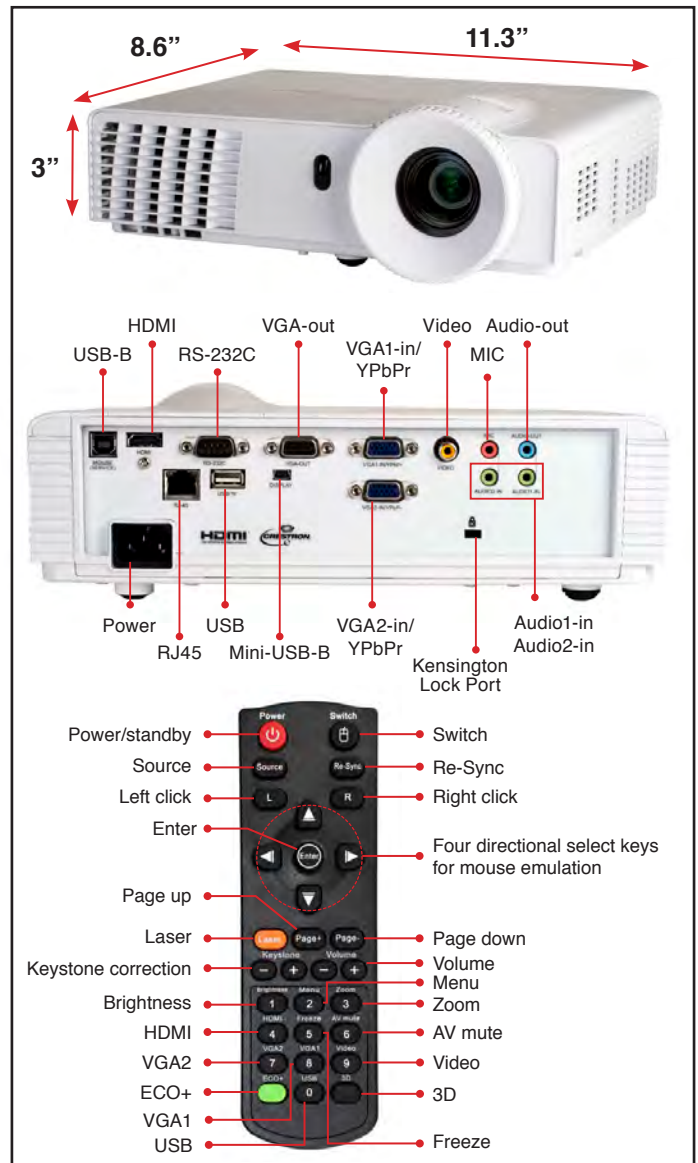

Warranty

Three-year Optoma Express Replacement Service, One-year on lamp

What Comes in the Box

AC power cord, VGA to VGA cable, remote control, batteries for remote control, carrying case, lens cap, CD-ROM users manual, quick start card and warranty card

Optional Accessories

Ceiling mount, mini USB WiFi dongle, HDMI cable, VGA to component cable, DLP Link 3D glasses, RS-232 cable and Optoma screens

Part Numbers

Lamp: BL-FP240B Remote: BR-5039L Case: BK-4023

UPC

TX635-3D: 796435 41 786 4
TW635-3D: 796435 41 809 0

www.OptomaUSA.com

Optoma
Projector Expert

Copyright © 2012 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other trademarks are the property of their respective owners. All specifications subject to change at any time. The Optoma Express Program is only valid in the U.S.