

MULTIMEDIA PROJECTOR W415

Optoma
Projector Expert

CRYSTAL CLEAR DIGITAL CONNECTIVITY

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com



WXGA resolution with DisplayPort and HDMI 1.4a connectivity



4500 lumens bright image with 15,000:1 contrast ratio makes it ideal for large screen applications



Lens shift for installation flexibility



Full 3D compatibility for audience captivating immersive presentations



1.5x zoom ratio for greater installation placement flexibility



The Optoma W415 is the perfect projector solution for medium to large size conference rooms, training rooms, higher education and houses of worship.

With a powerful 4500 lumens and a stunning 15,000:1 contrast ratio the W415 delivers bright large-screen presentations with fantastic image clarity, outstanding color accuracy and incredibly sharp image detail.

Designed for today's digital world, the W415 provides HDMI v1.4a, DisplayPort connectivity, vertical lens shift for installation flexibility and RJ45 for LAN command and control. Up to 7000 hours of lamp life and filter-free design minimize the cost of operation. It's compelling feature set include: Full 3D display compatibility, DICOM Simulation and sRGB display modes. Closed captioning, logo capture, Crestron RoomView® for remote monitoring and control, powerful 10-Watt speaker and more.

CONNECTIVITY (May require optional accessories)



COMPUTERS



SMART PHONES



TABLETS



3D BLU-RAY/DVD PLAYERS



SET TOP BOXES



CAMCORDERS



GAME CONSOLES



DIGITAL CAMERAS



Roku®



Apple TV®

MULTIMEDIA PROJECTOR — W415

OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	Single 0.65" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	WXGA (1280 x 800)
Maximum Resolution	HD (1920 x 1080)
Brightness (Typical)	4500 lumens
Contrast Ratio	15,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life* and Type	7000/4000/3000 Hours (ECO+/ECO/normal)
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	>80%
Aspect Ratio	16:10 native, 16:9 and 4:3 compatible
Throw Ratio	1.37–2.18 (distance/width)
Projection Distance	3.9'–32.8' (1.2–10 m)
Image Size (Diagonal)	25.5"–340" (0.65–8.6 m)
Projection Lens	F=2.42–2.97, f=20.7–31.05 mm 1.5x manual zoom and focus
Lens Shift Offset	Vertical: 107% ~ 119%
Digital Zoom	0.8 ~ 2.0
Typical Offset	112%
Audio	10-Watt speaker
Noise Level	35dB min.
Remote Control	IR remote mouse with laser
Operating Temperature	41–113°F (5–45°C), 85% max humidity
Power Supply	AC Input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 290W (Normal), Min 230W (Eco+), <0.5W (standby-ECO)

COMPATIBILITY SPECIFICATIONS


Computer Compatibility	HD, UXGA, SXGA+, WXGA+, WXGA, SXGA, XGA, SVGA, VGA, VESA, PC and Mac compatible
Video Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility†	Supports all HDMI 1.4a mandatory 3D formats, side-by-side format and top and bottom format. 3D glasses are needed and sold separately.
Vertical Scan Rate	24–85Hz, 120Hz, 144Hz
Horizontal Scan Rate	15.375–91.146KHz
User Controls	Complete on-screen menu adjustments in 27 languages
I/O Connection Ports	HDMI v1.4a, DisplayPort, two VGA-in, VGA-out, composite video, S-Video, audio-in, RCA audio-in, audio-out, 12V trigger, RS-232C, RJ45 & USB-B

PHYSICAL SPECIFICATIONS

Security	Kensington® lock port, security bar and keypad lock
Weight	5.95 lb (2.7 kg)
Dimensions (W x H x D)	11.26" x 4.88" x 10.43" (286 x 124 x 265 mm)



- | | | |
|-----------------|---------------------------|------------------|
| 1. VGA2-In | 7. RS-232C | 13. Audio-Out |
| 2. VGA1-In | 8. S-Video | 14. Audio1-In |
| 3. VGA-Out | 9. Video | 15. RCA Audio-In |
| 4. Display Port | 10. Kensington® lock port | 16. Security bar |
| 5. HDMI | 11. Power | |
| 6. RJ45 | 12. 12V Out | |

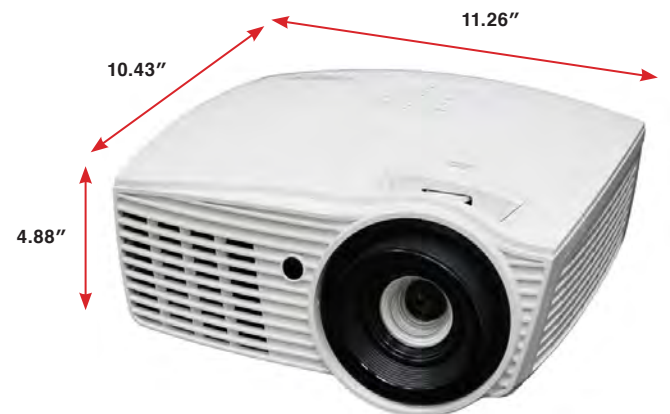

Warranty

3-Year Optoma Express Service, 1-Year on Lamp

What's In the Box

W415 projector, AC power cord, VGA to VGA cable, remote control, batteries for remote, carrying case, lens cap, CD-ROM user's manual, quick start card and warranty card

Optional Accessories

Wireless VGA dongle, ceiling mount, Optoma screens, DLP® Link™ 3D glasses

Accessory Part Numbers

Lamp: 5811118924-SOT	Mount: BM-5001U
Remote: BR-3070L	Wireless VGA dongle: BI-EXTBG03
DLP® Link™ 3D glasses: BG-ZD301	

UPC 796435 41 900 4

www.OptomaUSA.com

Optoma
Projector Expert

*Lamp-life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA Sync port. Please visit www.OptomaUSA.com for more information.

Copyright © 2014 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. The Optoma Express Program is only valid in the U.S.