

MULTIMEDIA PROJECTOR X303

Optoma
Projector Expert

EASY-TO-USE PERFORMANCE TOOL



Comprehensive connectivity to satisfy your current and future needs



20,000:1 Contrast ratio helps deliver the most impactful presentations




Up to 10,000 hours of lamp life for minimal cost of operation



Full featured remote for maximum convenience



RS-232C port for remote operation and control

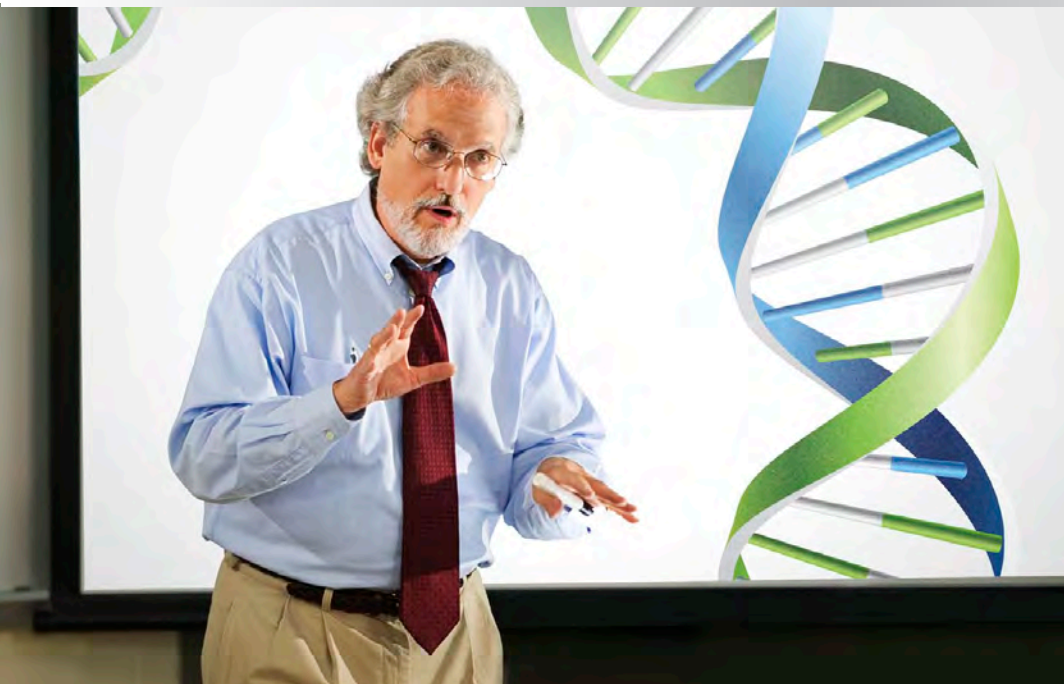

The Optoma X303 projector generates a powerful, up to 3000 lumens bright image, combined with an industry leading 20,000:1 contrast ratio to bring out the finest details on your most important presentations or class lessons. HDMI connectivity for full digital compatibility as well as two VGA inputs, composite and S-video to satisfy your current and future needs.

The X303 is incredibly easy to operate. Connect power and source, press the power ON button, and you will be presenting in no time.

CONNECTIVITY (May require optional accessories)



COMPUTERS



SMART
PHONES



TABLETS



3D BLU-RAY/DVD PLAYERS
SET TOP BOXES



CAMCORDER



GAME
CONSOLES



DIGITAL
CAMERAS



Roku®



Apple TV®

MULTIMEDIA PROJECTORS — X303

OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	Single 0.55" DC3 DMD DLP® Technology by Texas Instruments™
Native Resolution	XGA (1024 x 768)
Maximum Resolution	UXGA (1600 x 1200) & 1080p (1920 x 1080)
Brightness	3000 lumens
Contrast Ratio	20,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life and Type*	10,000/6500/6000/4500 Hours (Education cycle/ECO+/Dynamic/Bright) 190W
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±40° Vertical
Uniformity	>80%
Offset	115%
Aspect Ratio	4:3 Native, 16:9 compatible
Throw Ratio (distance/Width)	1.97–2.17
Projection Distance	3.9'–32.8' (1.2–10 m)
Image Size (Diagonal)	30"–300" (0.7–7.62 m)
Projection Lens	F=2.51–2.69, f=21.95–24.18 mm, 1.1x manual zoom and focus
Digital Zoom	0.8 ~ 2.0
Audio	2-Watt speaker
Noise Level	26dB
Remote Control	IR remote mouse control
Operating Temperature	41–113°F (5–45°C), 85% max humidity
Power Supply	AC Input 100–240V, 50–60Hz, auto-switching
Power Consumption	Max 240W (Normal), Min 194W (Eco+), <0.5W (standby-ECO)

COMPATIBILITY SPECIFICATIONS


Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized, VESA, PC and Mac compatible
Video Input Compatibility	NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)
3D Compatibility†	Supports all HDMI 1.4a mandatory 3D format, side-by-side format and top and bottom format. 3D glasses are needed and sold separately.
Vertical Scan Rate	24–85Hz, 120Hz, 144Hz
Horizontal Scan Rate	15.375–91.146KHz
User Controls	Complete on-screen menu, adjustments in 27 languages
I/O Connection Ports	HDMI v1.4a, two VGA-in, VGA-out, S-video, composite video, two audio-in, audio-out, RS-232C, USB-B
Loop Through (Audio, VGA)	<i>Monitor:</i> D-Sub 15 pin VGA output (functional in both normal and standby modes), <i>Audio:</i> VAO audio out, HDMI VAO audio out supported, (VAO in normal mode, fixed during Standby)

PHYSICAL SPECIFICATIONS

Security	Kensington® Lock Port, security bar and keypad lock
Weight	4.9 lb (2.21 kg)
Dimensions (W x H x D)	12.4" x 4.6" x 8.8" (315 x 117 x 223 mm)

*Lamp life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

†3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. *RF 3D glasses* require the use of an *RF 3D emitter* and a projector with a 3D VESA Sync port. Please visit www.OptomaUSA.com for more information.

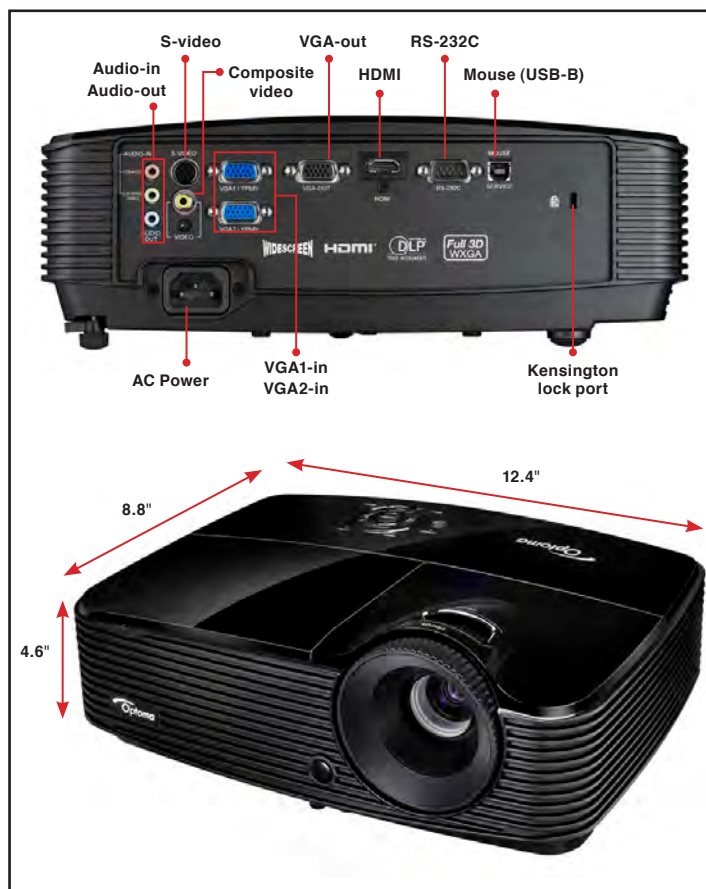

Warranty

2-Year Optoma Express Service, 1-Year Lamp

In the Box (Standard Accessories)

X303, AC power cord, VGA to VGA cable, remote control, carrying case, batteries for remote, multilingual CD-ROM user's manual, quick start card, and warranty card

Optional Accessories

HDMI cable, ceiling mount, component to VGA cable, RS-232 cable, Optoma screens and DLP® Link™ 3D glasses

Accessory Part Numbers:

Lamp: BL-FU190C	Remote: BR-5043N
Mount: BM-5001U	Power cord (5m): BC-PUPIXY05
Wireless VGA dongle: BI-EXTBG03	DLP® Link™ 3D glasses: BG-ZD301
Carrying case: BK-4032	

UPC 796435 41 816 8

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

www.OptomaUSA.com

Optoma
Projector Expert

Copyright © 2014 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. The Optoma Express Program is only valid in the U.S.