

# W515







## ProScene Widescreen Installation Projector



205 Westwood Ave, Long Branch, NJ 07740  
Phone: 866-94 BOARDS (26273) / (732)-222-1511  
Fax: (732)-222-7088 | E-mail: sales@touchboards.com



### PRO|SCENE

-  **4 corner Geometric Correction** for easy installation of basic stacking solutions or on uneven walls
-  **1.8x Zoom** - excellent image from a short or long distance
-  **Vertical/ Horizontal keystone and lens shift** for various applications
-  **Bright Projection** at 6000 ANSI lumens for large installations
-  **Full Control over LAN and RS-232** using Crestron, IP Link, Extron PJ-Link, and Telnet
-  **Two 10-Watt speakers** for excellent sound

The Optoma W515 is a professional Installation projector, ideal for corporate environments, house of worship and Pro-AV installs. W515 DLP® technology provides accurate colors and great contrast for dark and white images. This great projector is furnished with advanced features to facilitate a quick installation.

Features include: Four corner correction (ideal for image stacking or uneven walls), Horizontal and Vertical Lens shift and Keystone together with x1.8 zoom ratio, allow a quick setup and easy usability from any angle.

Equipped with a variety of inputs, including HDMI built in MHL technology, allows you to connect to a wide variety of HD devices to easily display your content. In addition, the environmentally friendly W515 has energy saving features including Eco+ lamp power management, <0.5W standby mode and auto power off, saving you both time and money by prolonging your lamp life.




### CONNECTIVITY (May require optional accessories)

### Technology/Features



# W515 — WXGA: Perfect for Corporate Presentations

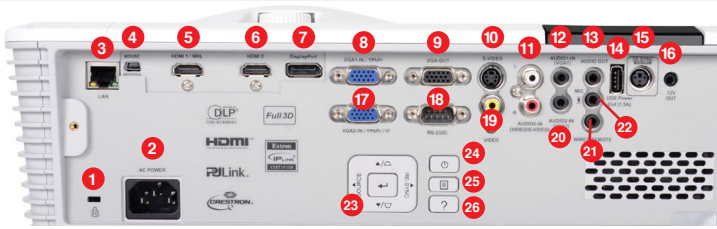

- |                          |                        |                        |
|--------------------------|------------------------|------------------------|
| 1. Kensington™ Lock Port | 10. S-Video            | 19. Composite Video    |
| 2. Power                 | 11. Audio3-In (RCA)    | 20. Audio2-In (3.5 mm) |
| 3. LAN                   | 12. Audio1-In (3.5 mm) | 21. Wired Remote       |
| 4. micro USB (service)   | 13. Audio-Out (3.5 mm) | 22. MIC-In (3.5 mm)    |
| 5. HDMI1-In (MHL)        | 14. USB (Power 1.5a)   | 23. Key Pad            |
| 6. HDMI2-In              | 15. 3D Vesa            | 24. Power On Button    |
| 7. Display Port          | 16. 12V Trigger        | 25. Menu               |
| 8. VGA1-In (YPbPr)       | 17. VGA2-In (YPbPr)    | 26. Information        |
| 9. VGA-Out               | 18. RS-232C            |                        |



## OPTICAL/TECHNICAL SPECIFICATIONS

|                              |  |
|------------------------------|--|
| <b>Display Technology</b>    | Single 0.65" WXGA chip, DLP® Technology by Texas Instruments™  |
| <b>Native Resolution</b>     | WXGA (1280 x 800)  |
| <b>Maximum Resolution</b>    | 1080p (1920 x 1080)  |
| <b>Brightness</b>            | 6000 ANSI lumens   |
| <b>Contrast Ratio</b>        | 10,000:1 (full on/full off)  |
| <b>Displayable Colors</b>    | 1.07 Billion   |
| <b>Lamp Life</b>             | 3000/4000 hrs (Bright/Eco)   |
| <b>Lamp Type*</b>            | 365W   |
| <b>Projection Method</b>     | Front, rear, ceiling mount, table top  |
| <b>Keystone Correction</b>   | ±30° Vertical; ±30° Horizontal   |
| <b>Uniformity</b>            | 80%  |
| <b>Offset</b>                | 105% (± 5% variance)   |
| <b>Lens Shift</b>            | Vertical: +20%<br>Horizontal: ±10%<br>(constraints apply see user manual for details)  |
| <b>Aspect Ratio</b>          | 16:10 Native, 16:9, 4:3, Auto  |
| <b>Throw Ratio</b>           | 1.26:1~2.268:1   |
| <b>Projection Distance</b>   | 4.26'~26.9' (1.3~8.2 m)  |
| <b>Image Size</b>            | 26.6"~302.1" (0.67~7.67 m), Diagonal 16:10   |
| <b>Projection Lens</b>       | F=17.63~31.36 mm; manual focus   |
| <b>Optical Zoom</b>          | 1.8x Manual zoom   |
| <b>Digital Zoom</b>          | 0.8~2.0  |
| <b>Audio</b>                 | 20-Watt  |
| <b>Noise Level</b>           | 28dB   |
| <b>Remote Control</b>        | IR and wired control   |
| <b>Operating Temperature</b> | 41~113°F (5~45°C), 85% max humidity  |
| <b>Power Supply</b>          | AC input 100~240V, 50~60 Hz, auto-switching  |
| <b>Power Consumption</b>     | 445W (Bright), 335W Max (ECO), <0.5W (Standby)   |
| <b>High Altitude</b>         | Operating Temperature at sea level 10,000 feet = 73.4°F (23°C) max; must manually switch to high altitude mode at 5,000 feet |

## PHYSICAL SPECIFICATIONS

|                               |   |
|-------------------------------|---|
| <b>Security</b>               | Kensington® lock port, security bar and password protection |
| <b>Weight</b>                 | 13 lb (5.9 kg)  |
| <b>Dimensions (W x H x D)</b> | 16.7" x 6.3" x 13.5" (424 x 160 x 344 mm)                   |

## COMPATIBILITY SPECIFICATIONS

|                                  |  |
|----------------------------------|--|
| <b>Computer Compatibility</b>    | UXGA, SXGA, XGA, SVGA, VGA, WXGA, HD, Mac  |
| <b>Video Input Compatibility</b> | PAL (B, D, G, H, I, M, N, 4.43MHz), NTSC (M, J, 3.58MHz, 4.443MHz), SECAM (B, D, G, K, L, 4.25MHz, 4.4MHz, 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz) 1080p(24/50/60Hz)   |
| <b>3D Compatibility†</b>         | Side-by-Side: 1080i(50/60Hz)<br>Frame-pack: 1080p(24Hz), 720p(50/60Hz)<br>Over-Under: 1080p(24Hz), 1080i(50/60Hz), 720p(50/60Hz)<br>3D glasses are needed and are sold separately.<br>Refer to user manual for details.  |
| <b>Vertical Scan Rate</b>        | 24~85 Hz (120 Hz for 3D feature projector)   |
| <b>Horizontal Scan Rate</b>      | 15.375~91.146 KHz  |
| <b>I/O Connection Ports</b>      | 1x Display port, 2x HDMI 1.4a + MHL, 2x VGA-In, 1x VGA out, Composite Video, S-Video, 3x Audio-In (stereo, 3.5mm and RCA), 1x Audio-Out (3.5mm jack), 1x Mic in (3.5mm jack), 12v trigger, USB type-A 5V, 3D Sync vesa port, RS-232C, mini-USB (service/control), RJ45, AC power (3 pin) |

### Warranty

3-Year Optima Express Service, 1-Year on Lamp

### In the Box (Standard Accessories)

W515 projector, AC power cord, VGA cable, remote control, batteries, multilingual CD-ROM user's manual, quick start card and warranty card

### Optional Accessories

Universal ceiling mount, Optima screen, DLP® Link™ 3D glasses, wireless HDMI system

### Accessory Part Numbers

|   |                      |
|---|----------------------|
| Lamp: SP.72109GC01  | Remote: SP.72101GC01 |
| RF 3D Glasses: ZF2300Glasses  | RF 3D Emitter: BC300 |
| DLP® Link™ 3D glasses: ZD302  |                      |
| Universal ceiling mount: OCM815B, OCM815W, OCM818B-RU, OCM818W-RU     |                      |
| Wireless accessories: WHD200, HDCast Pro - Black, WPS-PRO, BI-EXTBG03 |                      |

UPC 796435 41 956 1

\*Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

† 3D content can be viewed with RF of DLP® Link active shutter 3D glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA Sync port. Please visit [www.OptomaUSA.com](http://www.OptomaUSA.com) for more information.