

DEB-CV05
DEB-CV10
DEB-CV15
DEB-CV20

High Performance Component Audio Video Cable

3xRCA plugs to 3xRCA plugs

Use the Delta High Performance Audio Video Cables to connect a Blu-Ray player, DVD player, or cable/satellite receiver to a LCD/Plasma TV or projector. The result: a sharp, accurate picture and crisp, clear sound. Oxygen-free copper wire and foamed PE dielectric are optimized for audio signal transmission. The aluminum foil and braided copper shielding protect the signals from electromagnetic interference (EMI) and radio frequency interference (RFI). Color-coded molded connectors and an ultra-flexible jacket allow for easy installation. And, 24K gold-plated heavy-duty contacts ensure a lifetime of performance. Step up to Delta audio video cable to take performance to the next level.

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

16-65' (5-20m)
CABLE LENGTH



BLU-RAY
PLAYER



DVD PLAYER



DIGITAL
CAB/SAT



LCD/PLASMA
TV



PROJECTOR



Model Numbers


DEB-CV05	16' (5m)	High Performance Component Audio Video Cable
DEB-CV10	32' (10m)	High Performance Component Audio Video Cable
DEB-CV15	49' (15m)	High Performance Component Audio Video Cable
DEB-CV20	65' (20m)	High Performance Component Audio Video Cable

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
 Phone: 866-94 BOARDS (26273) / (732)-222-1511
 Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Features

- Exact cable geometry delivers outstanding sound quality and clarity
- HD 1080i/720p compatible
- 24K gold-plated contacts for superior signal transfer
- PCOFC oxygen free conductors minimize signal loss and distortion
- Braided PCOFC outer shielding and Aluminum foil inner shielding for protection against external electrical (EMI) and radio (RFI) interference
- PVC outer jacket for enhanced durability
- Foamed PE dielectric further enhances performance
- Color coded connector ends identify red, green or blue signal conductor

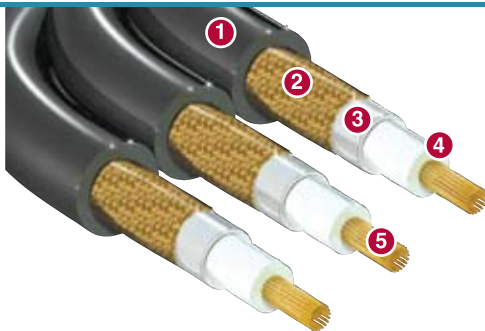

1. Durable PVC outer jacket
2. Braided PCOFC copper outer shielding
3. Aluminum foil inner shielding
4. Foamed PE dielectric
5. PCOFC copper conductors



Specifications

PART NO.	DESCRIPTION	CABLE LENGTH	UPC	PACKAGE WEIGHT
DEB-CV05	High Performance Component Audio Video Cable	16' (5m)	735029274896	2.5lb (1.1kg)
DEB-CV10	High Performance Component Audio Video Cable	32' (10m)	735029274902	4.0lb (1.8kg)
DEB-CV15	High Performance Component Audio Video Cable	49' (15m)	735029274919	5.1lb (2.3kg)
DEB-CV20	High Performance Component Audio Video Cable	65' (20m)	735029274926	6.6lb (2.9kg)

Not for in-wall use.