

DEW-HD05
DEB-HD10
DEB-HD15
DEB-HD20



Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

High Speed HDMI® Cables with Ethernet

For systems that demand increased performance and quality, Delta AV cables from Peerless are designed for enhanced data delivery and maximum durability. Oxygen-free PCOFC conductors and gun-metal plated zinc connectors provide optimal protection against RFI/EMI interference. Combined with 24K gold-plated contacts, this allows for high-speed transfers with minimal signal loss or distortion. Precision engineered for a crisp picture and crystal-clear sound, Delta AV cables take performance to the next level.

16-65' (5-20m)
CABLE LENGTH

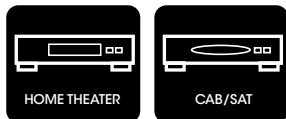

Model Numbers


DEW-HD05	16' (5m)	High Speed HDMI® Cables with Ethernet
DEB-HD10	32' (10m)	High Speed HDMI® Cables with Ethernet
DEB-HD15	49' (15m)	High Speed HDMI® Cables with Ethernet
DEB-HD20	65' (20m)	High Speed HDMI® Cables with Ethernet

Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

Features

- High Speed HDMI® Cable with Ethernet - HDMI® certified
- 3DTV compatible (stereo 1080p image resolution)
- Ethernet channel for connecting Internet-enabled AV devices minimizing cabling
- Audio return channel eliminates need for additional audio cable between TV with integrated receiver and amplifier
- Supports 4k x 2k image resolutions (2160p) and FULL HD (1080p) compatible
- Increased color profile support for digital cameras
- Exacting cable geometry delivers high speed data transfer rates
- 24K gold-plated contacts for superior signal transfer
- PCOFC oxygen free conductors minimize signal loss and distortion
- Braided PCOFC outer shielding and Aluminium foil inner shielding for protection against external electrical (EMI) and radio (RFI) interference
- Gunmetal-plated zinc and plastic connector provides additional protection from RFI/EMI noise
- PVC outer jacket for enhanced durability
- Foamed PE dielectric for enhanced performance

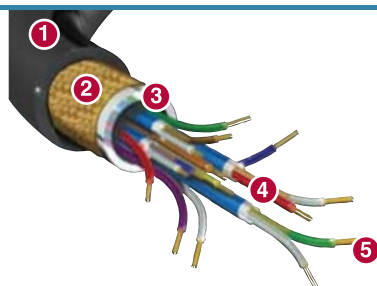

1. Durable PVC outer jacket
2. Braided PCOFC copper outer shielding
3. Aluminum foil inner shielding
4. Foamed PE dielectric
5. PCOFC copper conductors



Specifications

PART NO.	DESCRIPTION	CABLE LENGTH	UPC	PACKAGE WEIGHT
DEW-HD05	High Speed HDMI® Cables with Ethernet	16' (5m)	735029275442	1.2lb (0.5kg)
DEB-HD10	High Speed HDMI® Cables with Ethernet	32' (10m)	735029271826	3.1lb (1.4kg)
DEB-HD15	High Speed HDMI® Cables with Ethernet	49' (15m)	735029271840	4.2lb (1.9kg)
DEB-HD20	High Speed HDMI® Cables with Ethernet	65' (20m)	735029271864	5.3lb (2.4kg)

Not for in-wall use.

Visit peerlessmounts.com to see the full line of Peerless LCD/plasma, projector and TV/monitor mounts.

© 2011 Peerless Industries, Inc. All rights reserved.

® HDMI, the HDMI logo and High Definition Multimedia interface are trademarks, a registered trademark of HDMI licensing, LLC.

LIT-0687 rev.1

peerless®