

KIL640/642/646/647/648/655  
KIP640/642/646/647/648/655



Display size  
**40", 42", 46",  
47", 48" or 55"**

Max load  
**75lb (34kg)**

# Wall Kiosk Enclosure

Fits 40", 42", 46", 47", 48" and 55" Displays up to 2" (50mm) Thick


Whether transforming a letter board into an interactive directory or making a movie poster come to life, Peerless-AV's wall kiosks create engaging digital solutions for portrait or landscape oriented applications. Even with a slim ADA-compliant 3.97" profile, these wall kiosks accommodate most ultra-thin displays while providing room for media players, fans, and other electronic equipment to create an impressive interactive solution.

*Displaying digital signage content  
has never been easier!*



## Additional Features

- ✓ Eight way tool-less adjustment to quickly position display in kiosk window for flush alignment
- ✓ Accommodates displays 2.00" (50mm) thick to accentuate the slim kiosk design
- ✓ VESA® 200 x 200 up to 400 x 600mm compatible
- ✓ Thermostat controlled circulation fans ensure proper airflow within the kiosk
- ✓ Low profile design extends 3.97" (101mm) away from the wall which meets the Americans with Disabilities Act (ADA) certification
- ✓ Hinged top frame offers easy access to the display and other internal components for easy maintenance and enhanced security
- ✓ Supports wide range of aesthetic options including glass/acrylic, multiple colors, vinyl wraps, etc. to best match environment or promote brand strategy
- ✓ Pre-assembled to simplify installation of the entire solution
- ✓ Custom sizes available for smaller and larger displays

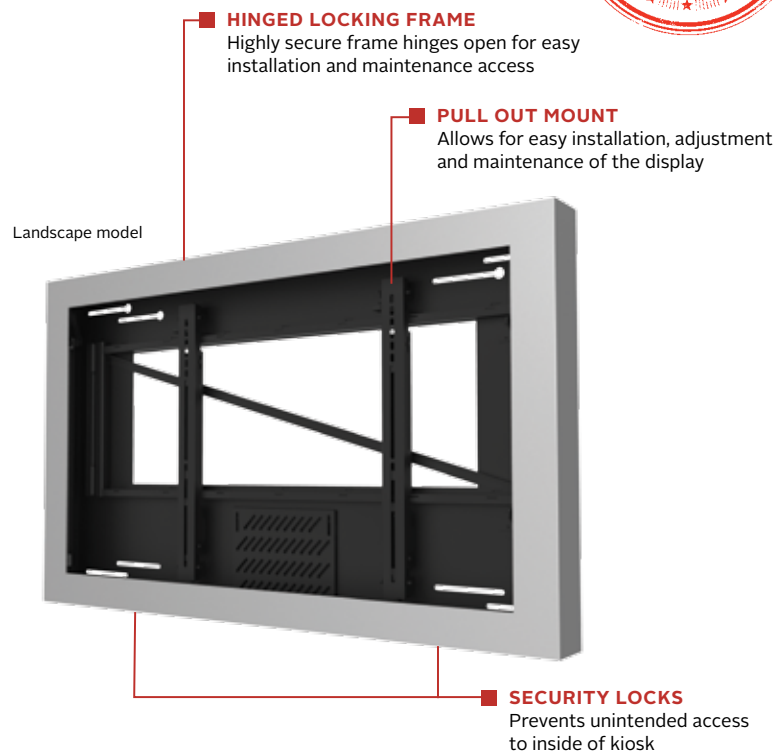

Portrait model



Pull out mount for easy installation of display

# Touchboards

205 Westwood Ave, Long Branch, NJ 07740  
Phone: 866-94 BOARDS (26273) / (732)-222-1511  
Fax: (732)-222-7088 | E-mail: sales@touchboards.com



RoHS



# Model Numbers

**WARRANTY: 5 years on metal components, 1 year on electronic components**

### Landscape Models:

|                   |  |
|-------------------|--|
| <b>KIL640(-S)</b> | Wall Kiosk Enclosure fits 40" Displays up to 2" (50mm) Thick |
| <b>KIL642(-S)</b> | Wall Kiosk Enclosure fits 42" Displays up to 2" (50mm) Thick |
| <b>KIL646(-S)</b> | Wall Kiosk Enclosure fits 46" Displays up to 2" (50mm) Thick |
| <b>KIL647(-S)</b> | Wall Kiosk Enclosure fits 47" Displays up to 2" (50mm) Thick |
| <b>KIL648(-S)</b> | Wall Kiosk Enclosure fits 48" Displays up to 2" (50mm) Thick |
| <b>KIL655(-S)</b> | Wall Kiosk Enclosure fits 55" Displays up to 2" (50mm) Thick |

### Portrait Models:

|                   |  |
|-------------------|--|
| <b>KIP640(-S)</b> | Wall Kiosk Enclosure fits 40" Displays up to 2" (50mm) Thick |
| <b>KIP642(-S)</b> | Wall Kiosk Enclosure fits 42" Displays up to 2" (50mm) Thick |
| <b>KIP646(-S)</b> | Wall Kiosk Enclosure fits 46" Displays up to 2" (50mm) Thick |
| <b>KIP647(-S)</b> | Wall Kiosk Enclosure fits 47" Displays up to 2" (50mm) Thick |
| <b>KIP648(-S)</b> | Wall Kiosk Enclosure fits 48" Displays up to 2" (50mm) Thick |
| <b>KIP655(-S)</b> | Wall Kiosk Enclosure fits 55" Displays up to 2" (50mm) Thick |

## Product Specifications

|                              | DIMENSIONS (W x H x D)                       | PRODUCT WEIGHT | LOAD CAPACITY | FINISH      | AVAILABLE COLORS                                      |
|------------------------------|--|----------------|---------------|-------------|---|
| <b>KIL640/642 models</b>     | 43.50" x 27.00" x 3.97" (1105 x 686 x 101mm) | 55.6lb (25kg)  | 75lb (34kg)   | Powder Coat | <b>KIL640/642/646/647/648/655:</b> Gloss black        |
| <b>KIP640/642 models</b>     | 27.00" x 43.50" x 3.97" (686 x 1105 x 101mm) | 62.6lb (28kg)  |               |             | <b>KIP640/642/646/647/648/655:</b> Gloss black        |
| <b>KIL646/647/648 models</b> | 48.00" x 29.00" x 3.97" (1219 x 737 x 101mm) | 61.8lb (28kg)  |               |             |   |
| <b>KIP646/647/648 models</b> | 29.00" x 48.00" x 3.97" (737 x 1219 x 101mm) | 67.8lb (30kg)  |               |             |   |
| <b>KIL655 models</b>         | 56.00" x 34.01" x 3.97" (1422 x 866 x 101mm) | 75.5lb (34kg)  |               |             | <b>KIL640-S/642-S/646-S/647-S/648-S/655-S:</b> Silver |
| <b>KIP655 models</b>         | 34.01" x 56.00" x 3.97" (866 x 1422 x 101mm) | 79.5lb (36kg)  |               |             | <b>KIP640-S/642-S/646-S/647-S/648-S/655-S:</b> Silver |

## Package Specifications

|                              | PACKAGE SIZE (W x H x D)                         | PACKAGE SHIP WEIGHT | PACKAGE UPC CODE   | PACKAGE CONTENTS                     | UNITS IN PACKAGE |
|------------------------------|--|---------------------|--|--------------------------------------|------------------|
| <b>KIL640/642 models</b>     | 50.00" x 36.00" x 8.00"<br>(1270 x 914 x 203mm)  | 65.6lb (29kg)       | <b>KIL640:</b> 735029296904<br><b>KIL640-S:</b> 735029296959   | Kiosk with display mounting hardware | 1                |
| <b>KIP640/642 models</b>     |  | 72.6lb (32kg)       | <b>KIL642:</b> 735029297444<br><b>KIP640-S:</b> 735029296935   |                                      |                  |
| <b>KIL646/647/648 models</b> | 54.00" x 39.00" x 8.00"<br>(1371 x 990 x 203mm)  | 71.8lb (32kg)       | <b>KIP642:</b> 735029297451<br><b>KIL642-S:</b> 735029297437   |                                      |                  |
| <b>KIP646/647/648 models</b> |  | 77.8lb (35kg)       | <b>KIL646:</b> 735029296911<br><b>KIP642-S:</b> 735029297468   |                                      |                  |
| <b>KIL655 models</b>         | 62.00" x 43.00" x 8.00"<br>(1574 x 1092 x 203mm) | 85.5lb (38kg)       | <b>KIL646-S:</b> 735029296973<br><b>KIP646-S:</b> 735029296942 |                                      |                  |
| <b>KIP655 models</b>         |  | 89.5lb (40kg)       | <b>KIL647:</b> 735029296928<br><b>KIP647-S:</b> 735029296966   |                                      |                  |
|                              |  |                     | <b>KIL648:</b> 735029307662<br><b>KIP648-S:</b> 735029307990   |                                      |                  |
|                              |  |                     | <b>KIL648-S:</b> 735029307891<br><b>KIP648-S:</b> 735029308003 |                                      |                  |
|                              |  |                     | <b>KIL655:</b> 735029308072<br><b>KIP655-S:</b> 735029308102   |                                      |                  |
|                              |  |                     | <b>KIP655-S:</b> 735029309199                                  |                                      |                  |

## Accessories

- ACC415:** 4-pack Metal Stud Fastener Kit
- CL-SCG200:** Screen Cleaning Gel
- DEB-HD10:** 32' (10m) High Speed HDMI® Cables with Ethernet
- PVP1000-PL6:** Surge Protector with Six Outlets

### KioskBuilder™:


Build your own Integrated Kiosk @ [kiosks.peerless-av.com](http://kiosks.peerless-av.com) including integration services, flat panel display, media player, content management software, power protection, thermal management, display protection, vinyl graphics, etc.



### Agion antimicrobial protection:

Agion® antimicrobial\* finish available to assist in controlling the spread of infections. Contact Peerless-AV Customer Care for more information.

\*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use.

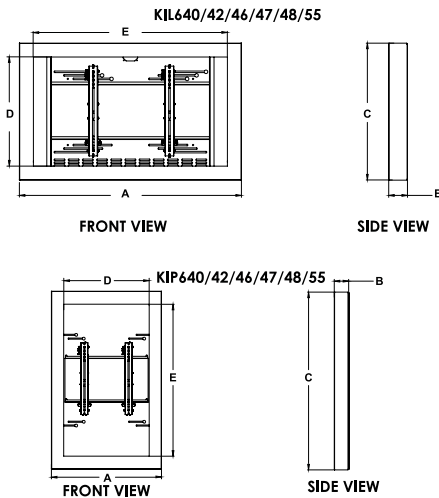

All dimensions = inch (mm)

| MODEL NO.     | DIMENSION "A"   | DIMENSION "B" | DIMENSION "C"  | DIMENSION "D"  | DIMENSION "E"   |
|---------------|-----------------|---------------|----------------|----------------|-----------------|
| <b>KIL640</b> | 43.50" (1105mm) | 3.97" (101mm) | 27.00" (686mm) | 19.67" (500mm) | 34.97" (888mm)  |
| <b>KIL642</b> | 43.50" (1105mm) | 3.97" (101mm) | 27.00" (686mm) | 20.65" (525mm) | 36.72" (933mm)  |
| <b>KIL646</b> | 48.00" (1219mm) | 3.97" (101mm) | 29.00" (737mm) | 22.61" (574mm) | 40.20" (1021mm) |
| <b>KIL647</b> | 48.00" (1219mm) | 3.97" (101mm) | 29.00" (737mm) | 23.10" (587mm) | 41.07" (1043mm) |
| <b>KIL648</b> | 48.00" (1219mm) | 3.97" (101mm) | 29.00" (737mm) | 23.59" (599mm) | 41.94" (1065mm) |
| <b>KIL655</b> | 56.00" (1422mm) | 3.97" (101mm) | 34.01" (866mm) | 27.03" (686mm) | 48.05" (1220mm) |

| MODEL NO.     | DIMENSION "A"  | DIMENSION "B" | DIMENSION "C"   | DIMENSION "D"  | DIMENSION "E"   |
|---------------|----------------|---------------|-----------------|----------------|-----------------|
| <b>KIP640</b> | 27.00" (686mm) | 3.97" (101mm) | 43.50" (1105mm) | 19.67" (500mm) | 34.97" (888mm)  |
| <b>KIP642</b> | 27.00" (686mm) | 3.97" (101mm) | 43.50" (1105mm) | 20.65" (525mm) | 36.72" (933mm)  |
| <b>KIP646</b> | 29.00" (737mm) | 3.97" (101mm) | 48.00" (1219mm) | 22.61" (574mm) | 40.20" (1021mm) |
| <b>KIP647</b> | 29.00" (737mm) | 3.97" (101mm) | 48.00" (1219mm) | 23.10" (587mm) | 41.07" (1043mm) |
| <b>KIP648</b> | 29.00" (737mm) | 3.97" (101mm) | 48.00" (1219mm) | 23.59" (599mm) | 41.94" (1065mm) |
| <b>KIP655</b> | 34.01" (866mm) | 3.97" (101mm) | 56.00" (1422mm) | 27.03" (686mm) | 48.05" (1220mm) |

## Architect Specifications

The Wall Kiosk Enclosure shall be a Peerless-AV model KIL/KIP640(-S), 642(-S), 646(-S), 647(-S), 648(-S) or 655(-S) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit [peerless-av.com](http://peerless-av.com) to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

**Peerless-AV**  
2300 White Oak Circle  
Aurora, IL 60502 USA  
  
**(800) 865-2112**  
**(630) 375-5100**  
**Fax: (800) 359-6500**

**Peerless-AV Europe**  
Unit 3 Watford Interchange  
Colonial Way, Watford  
Herts, WD24 4WP  
United Kingdom  
**+44 (0) 1923 200100**  
**Fax: +44 (0) 1923 200101**

**Peerless-AV de México**  
Ave de las Industrias 413  
Parque Industrial Escobedo  
Escobedo, N.L.,  
Mexico 66050  
**+52 (81) 8384-8300**  
**Fax: +52 (81) 8384-8360**

