

KIL740/742/746/747/748/755
KIP740/742/746/747/748/755



Display size

40", 42", 46",
47", 48" or 55"



Max load

75lb (34kg)

In-Wall Kiosk Enclosure

Fits 40", 42", 46", 47", 48" and 55" Displays up to 3.10" (78mm) Thick

When just a slim wall kiosk won't do, choose a Peerless-AV® In-Wall Kiosk. With a profile less than 1" thin, this in-wall kiosk creates a minimalistic look to large format digital wall signage. Complete with extending arms for ease of installation and a powerful fan to pull in fresh air for thermal management, this solution can be integrated into new construction or retrofit walls alike.

**Displaying digital signage content
has never been easier!**



Additional Features


- ✓ Eight way tool-less adjustment to quickly position display in kiosk window for flush alignment
- ✓ Accommodates displays 3.10" (78mm) thick while still fitting within standard wood stud walls
- ✓ VESA® 200 x 200 up to 400 x 600mm compatible
- ✓ Thermostat controlled circulation fans ensure proper airflow into the kiosk
- ✓ Removable front cover and pull-out mount offers easy access to the display and other internal components for easy maintenance and enhanced security
- ✓ Low-profile design extends 1" (25mm) away from the wall which meets the Americans with Disabilities Act (ADA) certification
- ✓ Supports wide range of aesthetic options including glass/acrylic, multiple colors, vinyl wraps, etc. to best match environment or promote brand strategy
- ✓ Pre-assembled to simplify installation of the entire solution
- ✓ Custom sizes available for smaller and larger displays

PULL OUT MOUNT

Allows easy installation and maintenance of display

8-WAY MICRO ADJUSTMENT

Provides quick vertical, horizontal and depth adjustment of display

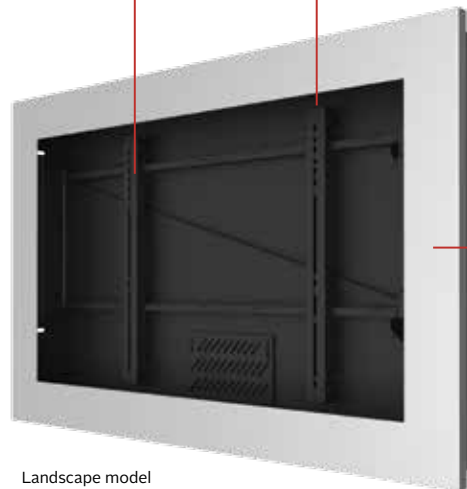

Landscape model

LOW PROFILE FRONT COVER

Meets the American with Disabilities Act (ADA) certification



Portrait model



Pull out mount for easy installation of display



RoHS
2002/95/EC



Model Numbers

WARRANTY: 5 years on metal components, 1 year on electronic components

Landscape Models:

KIL740(-S)	In-Wall Kiosk Enclosure fits 40" Displays up to 3.10" (78mm) Thick
KIL742(-S)	In-Wall Kiosk Enclosure fits 42" Displays up to 3.10" (78mm) Thick
KIL746(-S)	In-Wall Kiosk Enclosure fits 46" Displays up to 3.10" (78mm) Thick
KIL747(-S)	In-Wall Kiosk Enclosure fits 47" Displays up to 3.10" (78mm) Thick
KIL748(-S)	In-Wall Kiosk Enclosure fits 48" Displays up to 3.10" (78mm) Thick
KIL755(-S)	In-Wall Kiosk Enclosure fits 55" Displays up to 3.10" (78mm) Thick

Portrait Models:

KIP740(-S)	In-Wall Kiosk Enclosure fits 40" Displays up to 3.10" (78mm) Thick
KIP742(-S)	In-Wall Kiosk Enclosure fits 42" Displays up to 3.10" (78mm) Thick
KIP746(-S)	In-Wall Kiosk Enclosure fits 46" Displays up to 3.10" (78mm) Thick
KIP747(-S)	In-Wall Kiosk Enclosure fits 47" Displays up to 3.10" (78mm) Thick
KIP748(-S)	In-Wall Kiosk Enclosure fits 48" Displays up to 3.10" (78mm) Thick
KIP755(-S)	In-Wall Kiosk Enclosure fits 55" Displays up to 3.10" (78mm) Thick

Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
KIL740/742 models	45.41" x 28.91" x 5.15" (1153 x 734 x 131mm)	65.1lb (29kg)			KIL740/742/746/747/748/755: Gloss black
KIP740/742 models	28.91" x 45.41" x 5.15" (734 x 1153 x 131mm)	68.7lb (31kg)			KIP740/742/746/747/748/755: Gloss black
KIL746/747/748 models	50.40" x 31.85" x 5.15" (1280 x 809 x 131mm)	72.3lb (32kg)	75lb (34kg)	Powder Coat	
KIP746/747/748 models	31.85" x 50.40" x 5.15" (809 x 1280 x 131mm)	76.0lb (34kg)			KIL740-S/742-S/746-S/747-S/748-S/755-S: Silver
KIL755 models	57.90" x 35.35" x 5.15" (1471 x 898 x 131mm)	83.6lb (37kg)			KIP740-S/742-S/746-S/747-S/748-S/755-S: Silver
KIP755 models	35.35" x 57.90" x 5.15" (898 x 1471 x 131mm)	86.9lb (39kg)			

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE				PACKAGE CONTENTS	UNITS IN PACKAGE
KIL740/742 models KIP740/742 models	50.00" x 8.00" x 36.00" (1270 x 203 x 914mm)	75.1lb (34kg) 78.7lb (35kg)	KIL740: 735029297024 KIL740-S: 735029297086 KIL742: 735029297475 KIL742-S: 735029297482 KIL746: 735029297031 KIL746-S: 735029297093 KIL747: 735029297048 KIL747-S: 735029297109 KIL748: 735029307945 KIL748-S: 735029307952 KIL755: 735029307655 KIL755-S: 735029308096	KIP740: 735029296997 KIP740-S: 735029297055 KIP742: 735029297499 KIP742-S: 735029297505 KIP747: 735029297017 KIP747-S: 735029297079 KIP747: 735029297017 KIP747-S: 735029297079 KIP748: 735029308058 KIP748-S: 735029308065 KIP755: 735029308126 KIP755-S: 735029308133	Kiosk with display mounting hardware	1		
KIL746/747/748 models KIP746/747/748 models	54.00" x 8.00" x 39.00" (1372 x 203 x 991mm)	82.3lb (37kg) 86.0lb (39kg)						
KIL755 models KIP755 models	62.00" x 8.00" x 43.00" (1575 x 203 x 1092mm)	93.6lb (42kg) 96.9lb (43kg)						

Accessories

CL-SCG200:	Screen Cleaning Gel
DEB-HD10:	32' (10m) High Speed HDMI® Cables with Ethernet
PVP1000-PL6:	Surge Protector with Six Outlets

KioskBuilder™:

Build your own Integrated Kiosk @ kiosks.peerless-av.com including integration services, flat panel display, media player, content management software, power protection, thermal management, display protection, vinyl graphics, etc.




Agion antimicrobial protection:

Agion® antimicrobial* finish available to assist in controlling the spread of infections. Contact Peerless-AV Customer Care for more information.


*Antimicrobial protection is limited to the treated article and does not protect a user against disease causing bacteria. Always clean products thoroughly after each use.

All dimensions = **inch** (mm)

KIL740/42/46/47/48/55

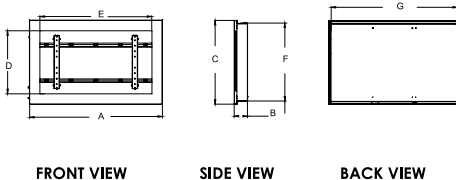

KIP740/42/46/47/48/55

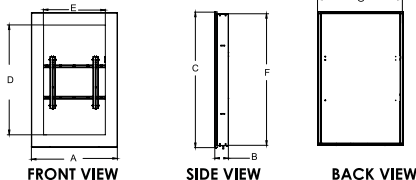

MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	DIMENSION "E"	DIMENSION "F"	DIMENSION "G"
KIL740	45.41" (1153mm)	5.15" (131mm)	28.91" (734mm)	19.67" (500mm)	34.97" (888mm)	27.50" (699mm)	43.25" (1099mm)
KIL742	45.41" (1153mm)	5.15" (131mm)	28.91" (734mm)	20.65" (525mm)	36.72" (933mm)	27.50" (699mm)	43.25" (1099mm)
KIL746	50.40" (1280mm)	5.15" (131mm)	31.85" (809mm)	22.61" (574mm)	40.20" (1021mm)	30.25" (768mm)	48.25" (1226mm)
KIL747	50.40" (1280mm)	5.15" (131mm)	31.85" (809mm)	23.10" (587mm)	41.07" (1043mm)	30.25" (768mm)	48.25" (1226mm)
KIL748	50.40" (1280mm)	5.15" (131mm)	31.85" (809mm)	23.59" (599mm)	41.94" (1065mm)	30.25" (768mm)	48.25" (1226mm)
KIL755	57.90" (1471mm)	5.15" (131mm)	35.35" (898mm)	27.03" (686mm)	48.01" (1220mm)	33.75" (857mm)	55.75" (1416mm)

MODEL NO.	DIMENSION "A"	DIMENSION "B"	DIMENSION "C"	DIMENSION "D"	DIMENSION "E"	DIMENSION "F"	DIMENSION "G"
KIP740	28.91" (734mm)	5.15" (131mm)	45.41" (1153mm)	34.97" (888mm)	19.67" (500mm)	43.25" (1099mm)	27.50" (699mm)
KIP742	28.91" (734mm)	5.15" (131mm)	45.41" (1153mm)	36.72" (933mm)	20.65" (525mm)	43.25" (1099mm)	27.50" (699mm)
KIP746	31.85" (809mm)	5.15" (131mm)	50.40" (1280mm)	40.20" (1021mm)	22.61" (574mm)	48.25" (1226mm)	30.25" (768mm)
KIP747	31.85" (809mm)	5.15" (131mm)	50.40" (1280mm)	41.07" (1043mm)	23.10" (587mm)	48.25" (1226mm)	30.25" (768mm)
KIP748	31.85" (809mm)	5.15" (131mm)	50.40" (1280mm)	41.94" (1065mm)	23.59" (599mm)	48.25" (1226mm)	30.25" (768mm)
KIP755	35.35" (898mm)	5.15" (131mm)	57.90" (1471mm)	48.01" (1220mm)	27.03" (686mm)	55.75" (1416mm)	33.75" (857mm)

Architect Specifications

The In-Wall Kiosk Enclosure shall be a Peerless-AV model KIL/KIP740(-S), 742(-S), 746(-S), 747(-S), 748(-S) or 755(-S) and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA

(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360



LIT-1080 rev.3