

PA735F(-S)

## Universal Articulating Wall Arm for 10"-26" Flat Panel Displays

It's easy to get the best viewing position when you can effortlessly pull out the display from the wall, position it in almost any direction, even turn it around corners and then smoothly return it to the wall when finished. Level the display at any time, even after installation, for that picture perfect end result. Never worry about cables and cords getting in the way; cable management delivers a clean clutter-free look to any installation.



### FEATURES


- Universal display adapters provide compatibility with displays with up to a VESA® 200 x 100mm mounting hole pattern
- Arm extends up to 14.74" (374mm) from wall
- Three adjustable pivot points for versatile display positioning
- ±5° of roll for post-installation display leveling
- Integrated cable management keeps cables out of the way



Display size: 10"-26"



Max load: 25lb (11kg)

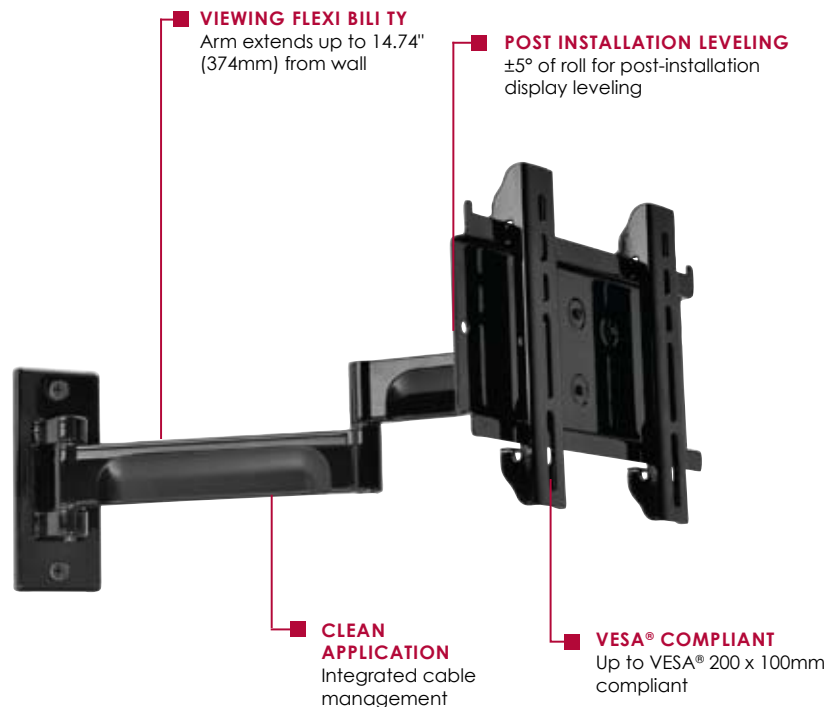

Integrated cable management

**PA735F(-S)** Universal Articulating Wall Arm for 10"-26" Flat Panel Displays

## Product Specifications

	DIMENSIONS (W x H x D)	PRODUCT WEIGHT	LOAD CAPACITY	FINISH	AVAILABLE COLORS
<b>PA735F(-S)</b>	9.77" x 8.53" x 3.08"-14.74" (248 x 217 x 78-374mm)	3.8lb (1.7kg)	25lb (11kg)	Scratch resistant fused epoxy	PA735F: Gloss black PA735F-S: Gloss silver


## Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
<b>PA735F(-S)</b>	10.5" x 3.25" x 14.5" (267 x 83 x 368mm)	4.1lb (1.8kg)	PA735F: 735029269748 PA735F-S: 735029269786	Mount, wall and display mounting fasteners	1

## Accessories

**ACC919:** Security Fasteners  
**WSP700:** Metal Stud Wall Plate for 16" center metal studs  
**WSP701:** Metal Stud Wall Plate for 20" and 24" center metal studs

All dimensions = inch (mm)

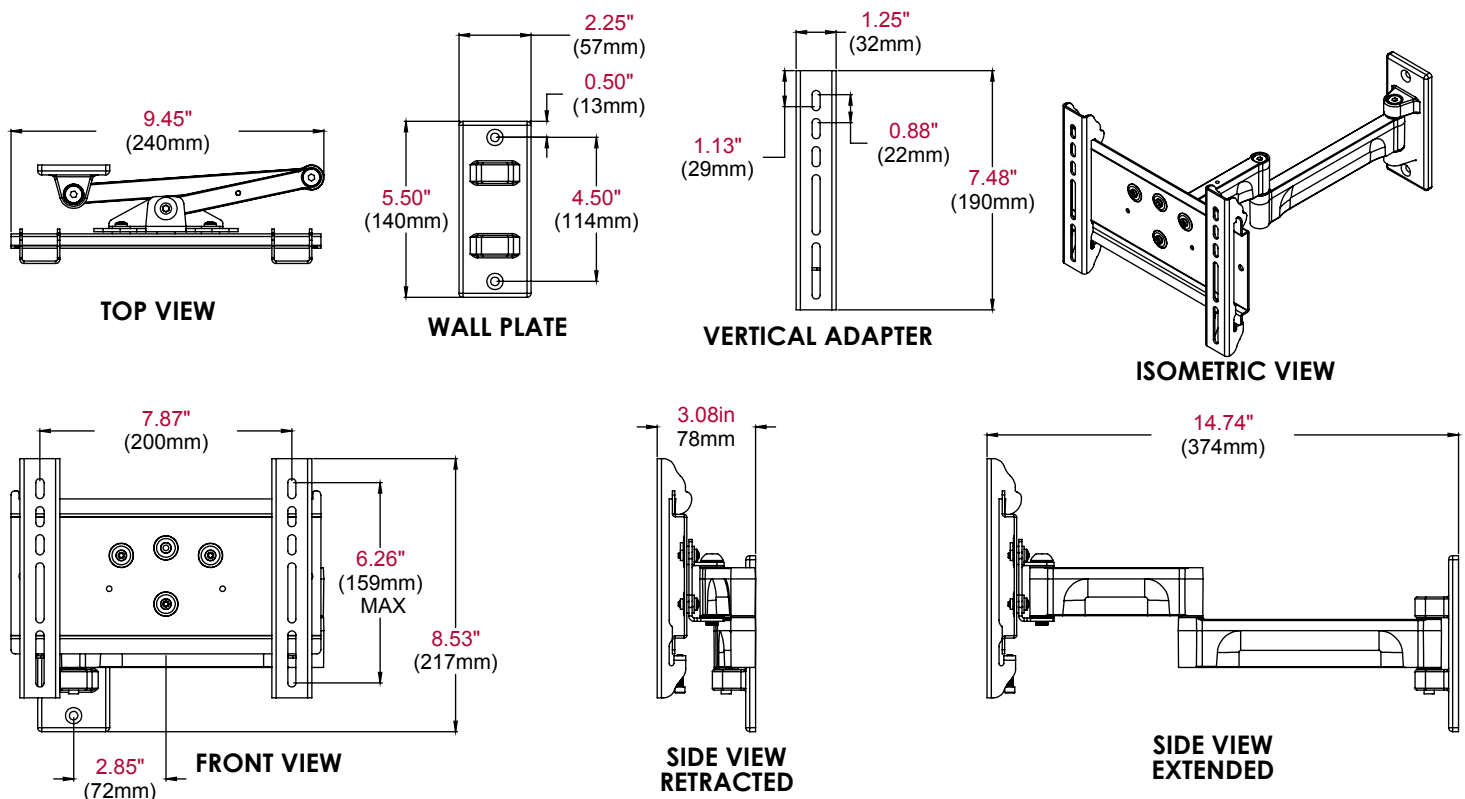

## ARCHITECTS SPECIFICATIONS

The Universal Articulating Wall Arm shall be a Peerless-AV model PA735F and shall be located where indicated on the plans. It shall feature scratch resistant black or silver fused epoxy finish.

Assembly and installation shall be done according to instructions provided by the manufacturer.