



# Planar Venue Pro Series

## LED Video Wall Displays

- ▶ *1.9, 2.5, 3.9, 5.9mm pixel pitches*
- ▶ *Front or rear service & installation*
- ▶ *Single-person handling*
- ▶ *Hang, stack, or wall mount*




Planar® Venue™ Pro Series indoor LED video wall displays are designed to meet the needs of temporary event applications, large venues and fixed installations. They offer full front or rear service access to electronics for deployment versatility, and magnetically-attachable cabinets with a quick-lock system to support single-person handling.

## Easy Access

Front-side installation and service shrink the overall video wall footprint and servicing space needed behind the wall making it simpler to fit in more spaces than other LED video wall solutions. Installation and service are also possible from the rear, when needed.



# Product Highlights

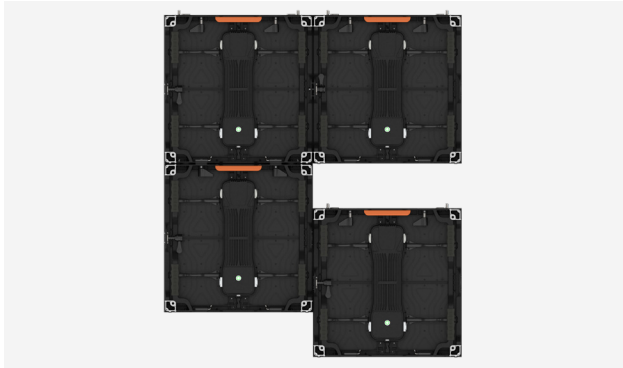

## Solo Set-up

Magnetic points briefly hold the LED cabinet in place while a lone installer can secure it and finalize cabling. Handles, locking pins and an embedded quick-lock system also make it easy and efficient to secure cabinets together.

## Compact Components

All electronics are contained in single, compact compartment on the back of the cabinet that is accessible from the front. The compartment is easily removable to quickly access and service all components, and facilitate wall mounting.

# Specifications

Model	VPI-1.9	VPI-2.5	VPI-3.9	VPI-5.9
<b>Pixel Pitch (mm)</b>	1.9	2.5	3.9	5.9
<b>Cabinet Size (W x H x D)</b>	19.69"x19.69"x2.7" (500x500x74mm)		19.69"x19.69"x3.03" (500x500x77mm)	
<b>Cabinet Diagonal</b>	27.83" (707.10mm)			
<b>Cabinet Area (m<sup>2</sup>)</b>	0.25			
<b>Cabinet Resolution</b>	256x256	200x200	128x128	84x84
<b>Pixel Density (per m<sup>2</sup>)</b>	262,144	160,000	65,536	28,244
<b>Modules/Cabinet (W x H)</b>	2x2			
<b>Module Size (W x H)</b>	250x250mm			
<b>Power Consumption, Maximum (watts)</b>	160			
<b>Line Voltage</b>	100~240v AC, 50/60Hz			
<b>Cabinet Weight (per display)</b>	≤ 17.764lbs			
<b>Cabinet Weight (per m<sup>2</sup>)</b>	≤ 70.55lbs			
<b>Brightness Max, Calibration On (cd/sq)</b>	1,000			
<b>Supported Frame Rate</b>	50Hz/60Hz			
<b>Color Temperature (K)</b>	3,000-10,000 adjustable			
<b>Contrast</b>	6,000:1			
<b>Viewing Angle (50% of brightness)</b>	>150° horizontal; >130° vertical			
<b>Mounting Orientation</b>	Wall mount, faceted, hanging, stacking			
<b>Installation/Service</b>	Front or Rear			
<b>Refresh Rate</b>	3,840Hz			
<b>LED Lifetime (50% brightness)</b>	100,000hrs			
<b>Operating Temp/ Humidity (degrees F/C)</b>	-20° to 40° C   -22° to 102° F (10-80% RH, non-condensing)			
<b>Storage Temp/ Humidity (degrees F/C)</b>	-40° to 60° C   -40° to 140° F (10-85% RH, non-condensing)			
<b>IP Rating</b>	30			

For more information, click to visit: [www.planar.com/venue-pro](http://www.planar.com/venue-pro)

Planar is a trademark of Planar Systems, Inc. All other trademarks and service marks are property of their holders. Copyright © 2022 Planar Systems, Inc. All rights reserved. This document may not be copied in any form without permission from Planar. Information in this document is subject to change without notice. 3/2022