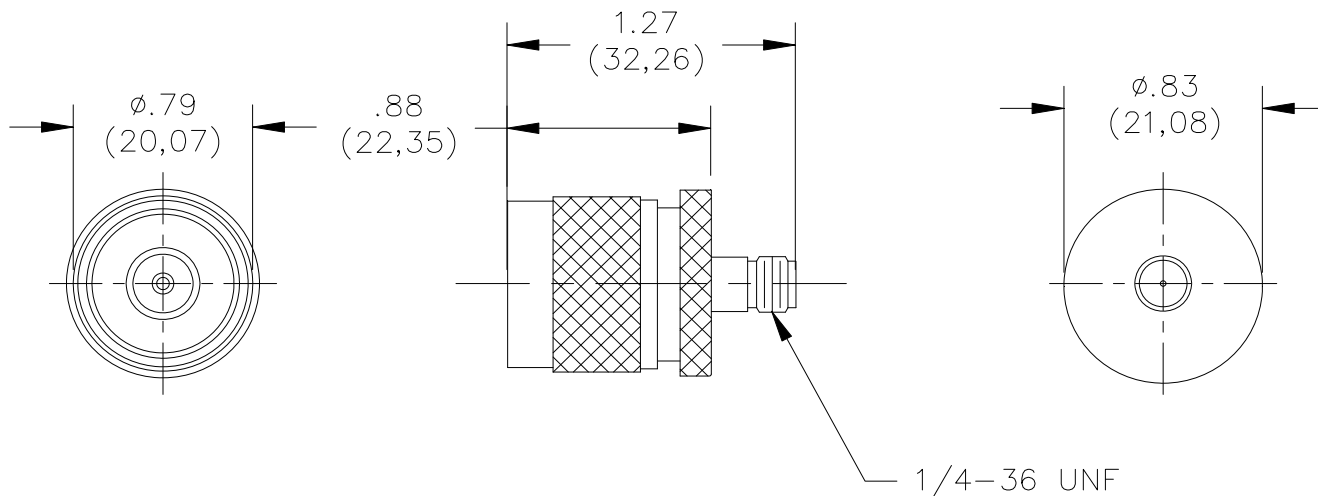


**Model 4297**  
**SMA (F) to Type N (M) Adapter****Materials**

Body: Gold Plated Beryllium Copper  
Male Contact – Gold Plated Brass  
Female Contact – Gold Plated Beryllium Copper  
Dielectric: PTFE per L-P-403  
Finish: Body and Contacts – Gold Plated per MIL-G-45204, Type II, Class 2  
Marking: "Pomona 4297"

**Ratings**

Operating Voltage:  
Shield/Earth: 30VAC/60VDC Max.  
Inner Conductor/Shield: 335VRMS Max.  
Operating Temperature:  
-65°C to +165°C (-85°F to +329°F)  
Nominal Impedance: 50 Ohms  
Frequency Range: 0 – 12.4 GHz

**Ordering Information**

Model: 4297

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844  
**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (.51 mm),  $.xxx = \pm .005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.