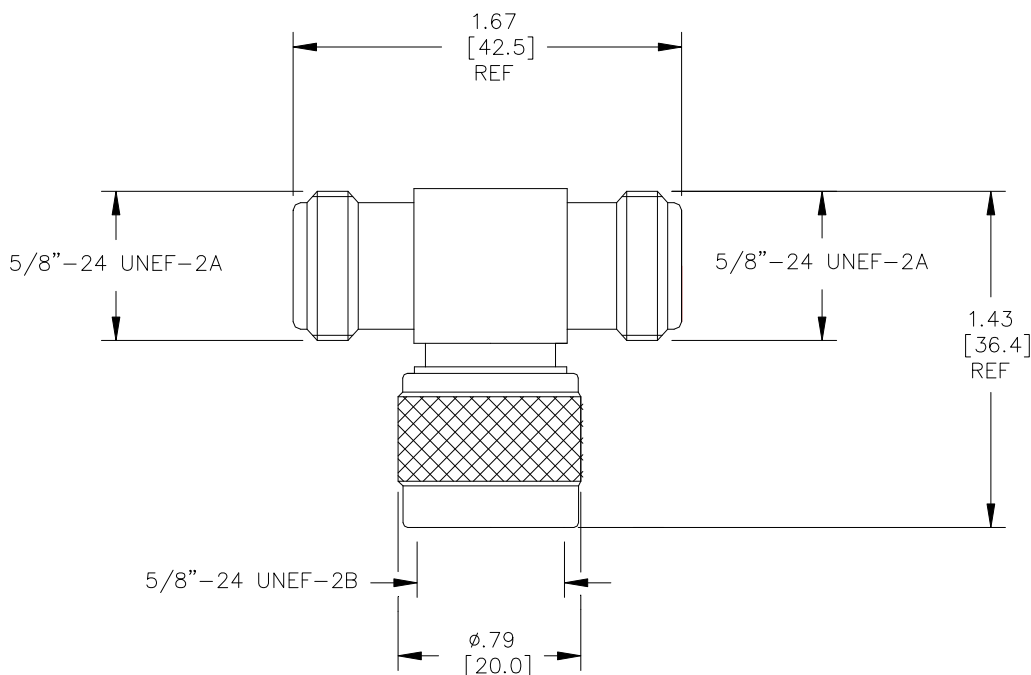


Model 73044
N Type "T" Jack-Plug-Jack Adapter

Model 73044
N Type "T" Jack-Plug-Jack Adapter

Features

- DC – 4GHz bandwidth.
- Connectors are precision machined.
- Meets interface requirements MIL-C-39012.

Materials

Center Conductor:

Male: Brass, Gold Plated

Female: Phosphor Bronze, Gold Plated

Connector Body: Brass, Nickel Plated

Insulators: PTFE

Specifications

Impedance: 50 Ω

Frequency Range: DC – 4GHz

Contact Resistance:

Center Conductor: $\leq 1.0\text{ m}\Omega$

Outer Conductor: $\leq 0.2\text{ m}\Omega$

Insulation Resistance: $\geq 5000\text{ M}\Omega$

Dielectric Withstand Voltage: 1500V

For CE compliance, do not hold in hand when voltages exceed 33 Vrms / 70 Vdc.

Number of Insertions: 500 cycles minimum

Ordering Information

Model: **73044**

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ± 0.02 " (.51 mm), .xxx = ± 0.005 " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.