

Low-Profile Universal Projector Mount

Model: **PDS-PLUS**, **PDS-PLUS-W**

Weight Capacity: 75 lb / 341 kg.


Features

1 OSHPD and DSA approved (OPA-1787-07), as well as UL Listed

2 Lock-lt[™] security hardware and leveling barrel provide strong protection

3 Mates to standard 1.5 in. NPT or directly to structural surfaces

- Cable routing through body
- Slotted mounting base with six interchangeable legs (four long and two short) to reach wider mounting points
- Low profile universal projector mount can be mounted directly to ceiling
- Available in black (PDS-PLUS) or white (PDS-PLUS-W)

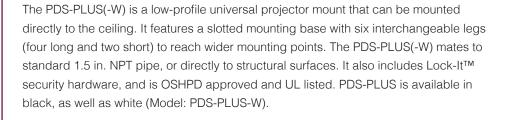









Slotted mounting base with six interchangeable legs (four long and two short)



Patented Lock-ItTM security hardware and leveling barrel provide protection



Can mate with a standard 1.5" NPT or directly to structural surfaces

Low-Profile Universal Projector Mount

PDS-PLUS, PDS-PLUS-W

Specifications

Color PDS-PLUS Black PDS-PLUS-W White	Weig 4.92 lb. :	3		leight . 71 mm
Roll	Pitch	Yaw 360° If Mounted to Pipe 42.00° If Mounted Directly to the Ceiling	Mounting Reach	Warranty
+7.50°/-7.50°	+16.50°/-16.50°		16.43 in. 417 mm	Lifetime

Packaging

Length x Width x Height

11.75 x 11.63 x 6.38 in. | 298 x 295 x 162 mm

Contents

PDS-PLUS Assembly (x1), M6 Key Lock (x1), Hardware Kit (x1)

Accessories



Plenum Rated False
Ceiling Equipment Storage
w/ Pipe Coupler

GB-AVSTOR5




False Ceiling Adapter w/ Quick-Lock Cable **PP-FCTA-QL**



Adjustable Height Ceiling Adapter (13 - 21 in.) AST-1321

Architectural Drawing

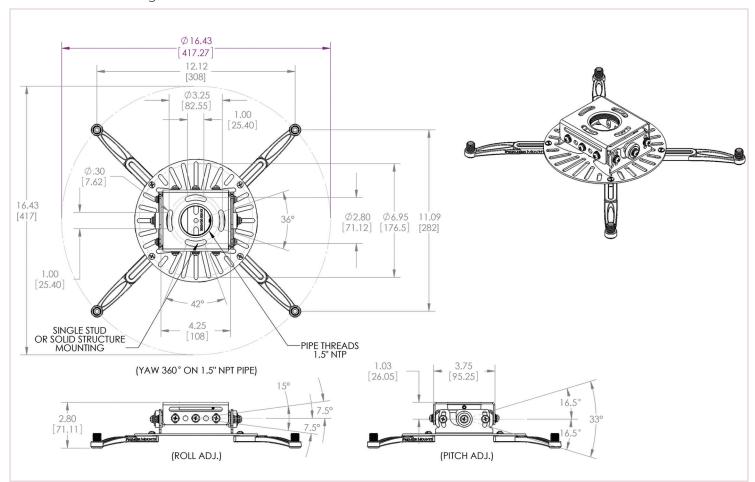

Specifications subject to change without notice

PREMIER MOUNTS