


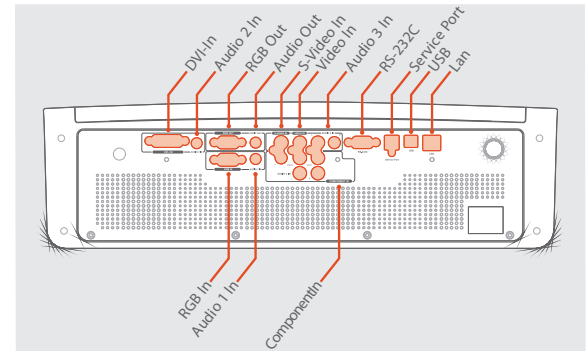
Model	PRO5000SL-NL		
Technology	.79" 3LCD		
Brightness	5000 Lumens (standard) 4000 Lumens (economy)		
Native Resolution	1024 x 768 (XGA)		
Supported Resolution	1600 x 1200 (UXGA)		
Colors	16.7 Million		
Brightness Uniformity	85%<		
Projection Methods	Tabletop front/rear; Ceiling front/rear		
Contrast Ratio	600:1		
Aspect Ratio	Native 4:3; Compatible 16:9, 16:10		
Image Size	40 in to 300 in / 1.02 m to 7.6 m		
Projection Distance	4 ft to 36 ft / 1.22 m to 10.97 m		
Lens	Manual zoom and focus		
Keystone Correction	Vertical +/- 30 degrees		
Horizontal Scan Rate	31 to 92 kHz		
Vertical Scan Rate	48 to 120Hz		
Audio Output	1 x 8W mono speaker		
Lamp	330W (standard) / 264W (economy)		
Lamp Life	2000 (standard) / 3000 (economy)		
Remote Control	Multi-function IR remote with laser pointer		
Noise Level	38dB (standard) / 34dB (economy)		
Power Supply	AC Input 100-240V		
Power Consumption	450W <1W in standby mode		
Computer Compatibility	UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA resized; VESA standards; PC and Macintosh compatible		
Video Compatibility	EDTV (480p), HDTV (720p, 1080i), NTSC/NTSC 4.43, PAL B/G/H/I/M/N 60, SECAM		
Connectivity	Component (RCA x3) DVI-I, VGA-in, composite video, S-video, RCA stereo audio-in (x2), mini-jack audio-in (x2), USB for mouse control, VGA-out, mini-jack audio-out		
Service and Network Control	RS232X, RJ45		
Weight	16.7 lbs / 7.6 kg with lens		
Dimensions (W x H x D)	18.9 in x 6.1 in x 14.4 in / 48 cm x 15.5 cm x 36.6 cm		
Operating Temperature	N/A		
Standard Accessories	AC power cord, VGA cable, USB cable, remote control with batteries, user manual (CD)		
Optional Accessories	Non-standard lenses, replacement remote control, harsh environment filter component, video cable, DVI-D cable, ceiling mount, S-video cable, carrying case		
OPTIONAL LENSES			
PRO5000SL-911	1.8 - 2.3	Zoom Ratio	1.27
PRO5000SL-912	2.3 - 2.8	Zoom Ratio	1.25
PRO5000SL-913	3.1 - 4.1	Zoom Ratio	1.26




* Shown with lens

Key Features

- Five auto features (Auto search, Auto sync, Auto ceiling, Auto keystone and Auto filter alert)
- 5000 lumens with multiple lens options
- Email Monitoring
- Robust input panel
- Optional harsh environment filter
- RJ45 network ready
- Side changing lamp and filter



Throw Distance (ft)

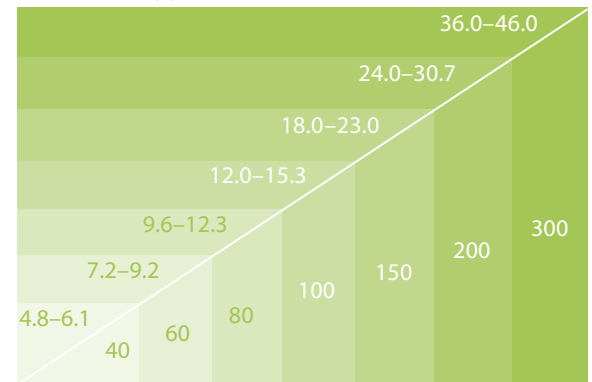

Diagonal Image Size (in)

Award Winning Technical Support 24/7/365

And, of course, all BOXLIGHT products come with free lifetime technical support. Speak with a hands-on, in-house, ISF Certified® technician ready to service your projector should the need arise.

© 2012 BOXLIGHT, Inc. Specifications subject to change without notice.
Helps meet ADA Section 508 compliance
BOXLIGHT NE 151 Highway 300, Suite A PO Box 2609 Belfair, WA 98528



205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

360.464.2119
www.BOXLIGHT.com