



Recirculating fume extraction is now extremely important with the rising concern for our environment and employee safety. Purex Fume Extractors provide not only a flexible and portable process for plant redesigns and expansions, but also a more stable process by providing a controlled airflow to remove harmful fumes. All this while eliminating the added costs of building modifications, increased air handling systems and lost energy.


Model 650

Purex Digital Systems

- Automatic Flow Control maintains constant extraction rate
- ✤ Adjustable Air Flow extends filter life
- Blocked Filter Warning
- Easy to change filters
- Low energy consumption
- Quiet operation
- Welded stainless steel construction
- Reverse Air Flow prevents
 condensation and extends filter life
- Continuous run brushless motors


- HEPA filtration removes 99.997%
 of particles down to .3 microns
- ✤ Gas and particle sensors on exhaust
- * Filter Blocked Monitor
- ✤ Gas Safety Sensor
- Particle Safety Sensor
- Motor Run Indicator
- Airflow reading
- Filtered air temperature
- Quick-read visual display
- Remote Machine Interface

650 Volume Control

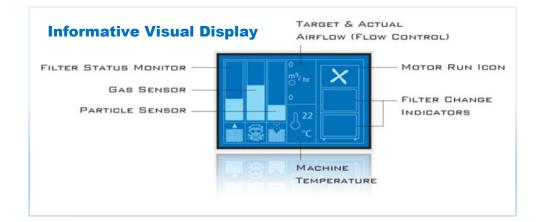

Main Filter Options				
	HEPA/Chemical HEPA/Twin Chemical HEPA Chemical Cleanroom* Chemical	113505 113579 113512 113508		
	*Use F8/F9 Pre-filter			
Labyrinth Pre-Filter Options				

F5 Pack of 4 (std)



- 1) Air inlet
- 2) Pre-filter
- 3) Main filter (HEPA)*
- 4) Main filter (Carbon)*
- 5) Clean air return
- 6) Filter lock Handle
- 7) Filter I.D. label

*Standard filter only

Arm	and	Hood

F8/F9 Composite Pack of 4



75mm Arm (Range 1620mm max)120197Hood 420mmx320mm840116One arm and hood included.Additional arm and hood available.

	650		
Model	080472D	080467D	
Voltage (50hz/60Hz)	120v (1ph)	230v (1ph)	
Wattage	.36 kW		
Airflow (1 Arm)	178 cfm (302 m³/Hr)		
Vacuum	11.2 inwg (2.8 kPa)		
Air Inlet	2 x 75 mm (2.95 in)		
Sound Rating	50 dBA		
Dimensions (L/W/H)	17.5 in x 24 in x 28.2 in		
Weight	110 lbs		

202260

200223